



Pomona®

Model 2399
Size A Aluminum Box With Cover
SMA Female/Female

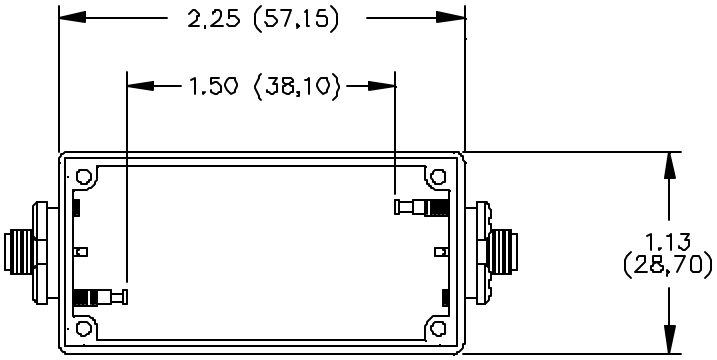

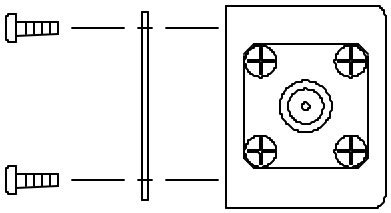

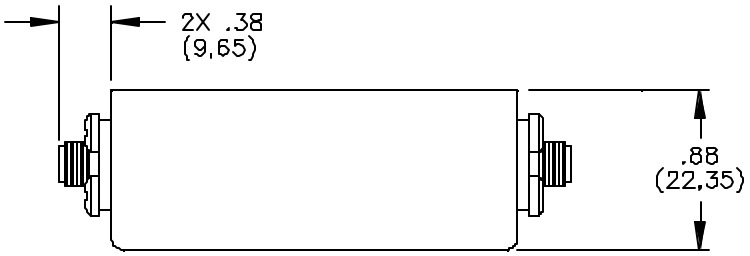

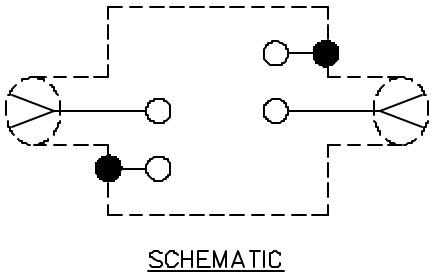

MATERIALS:

Connector: 2 ea. SMA Receptacle. Body: Tarnish Resistant Plating, Center Contact: Gold Plated Beryllium Copper

Solder Turret Terminal Screws: Steel

Shielded Housing: Die cast aluminum alloy A380 or A384.

Finish: Blue paint per Federal Standard 595 #25109 over Phosphoric Etch

Cover: .040 Thick aluminum alloy #1100-H14

Finish: Clear Anodized

Screws: Steel 4 ea. #2-32 x ¼" Pan Head, self-tapping

RATINGS:

Operating Voltage: Inner conductor/Shield: 335 VRMS Max.

Operating Temperature: -55ºC to +150ºC

Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 2399

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060