GSC103A

Dual Operational Amplifier and Voltage Reference

Description

The GSC103A is a monolithic IC that includes one independent op-amp and another op-amp foe which the non inverting input is wired to a 2.5V fixed Voltage Reference. This device is offering space and cost saving in many applications like power supply management or data acquisition system.


Operational Amplifier


- Low Input Offset Voltage: 0.5mV(typ.)
- Low Supply Current :350uA/op. (@Vcc=5V)
- Medium Bandwidth (unity gain) : 0.9MHz
- Large Output Voltage Swing: 0V to (Vcc-1.5V)
- Input Common Mode voltage Range Includes Ground
- Wide Power Supply Range: 3 to 32V±1.5 to ±16V

Voltage Reference

- Fixed Output Voltage Reference 2.5V
- 0.4% Voltage Precision
- Sink Current Capability: 1 to 100mA
- Typical Output Impedance: 0.2Ω


Package Dimensions

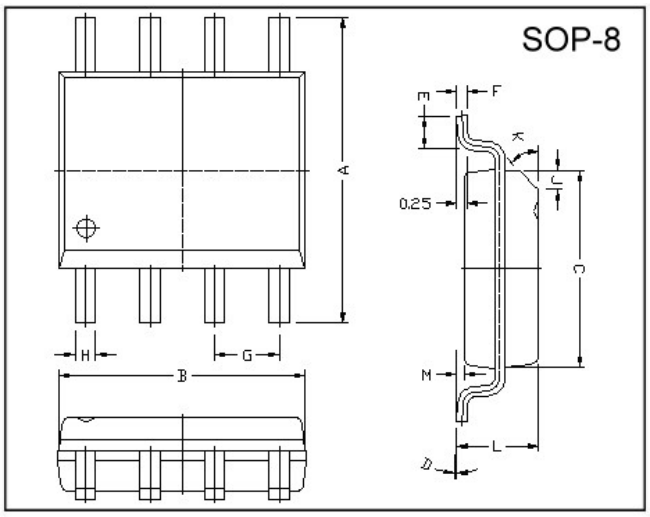



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	5.80	6.20	M	0.10	0.25
B	4.80	5.00	H	0.35	0.49
C	3.80	4.00	L	1.35	1.75
D	0°	8°	J	0.375 REF.	
E	0.40	0.90	K	45°	
F	0.19	0.25	G	1.27 TYP.	

Pin Connections

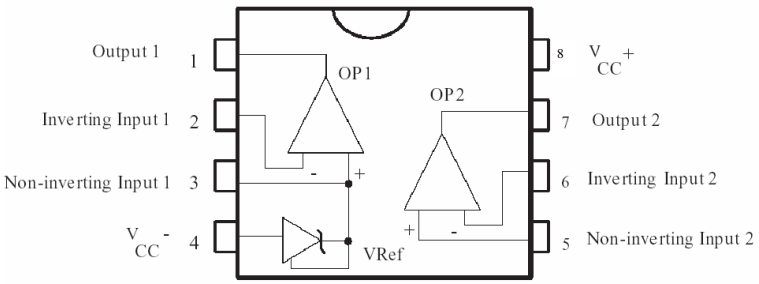

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	36	V
Differential Input Voltage	V_{id}	36	V
Input Voltage	V_i	-0.3 ~ +36V	V
Maximum Junction Temperature	T_J	150	℃
Operating Ambient Temperature Range	T_{oper}	-40 ~ + 105	℃
Thermal Resistance junction Ambient Temperature	$R_{\theta JA}$	175	℃/W

Electrical Characteristics

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Total Supply Current, Excluding Current in the Voltage Reference	I_{CC}	V_{CC}^+=5V, no load, Tmin < T_A < Tmax	-	0.7	1.2	mA
		V_{CC}^+=30V, no load, Tmin < T_A < Tmax	-	-	2	mA

Operator2 (independent op-amp)

V_{CC}^+=+5V, V_{CC}=Ground, V_O=1.4V T_A=25℃ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Offset Voltage	V_{io}	T_A=25℃ Tmin ≤ T_A ≤ Tmax	- -	0.5 -	3 5	mV
Input Offset Voltage Drift	DV_{io}		-	7	-	uV/℃
Input Offset Current	I_{io}	Tmin ≤ T_A ≤ Tmax	- -	2 -	30 50	nA
Input Bias Current	I_{ib}	Tmin ≤ T_A ≤ Tmax	- -	20 -	150 200	nA
Large Signal Voltage Gain	Avd	V_{CC}=15V, R_L=2k, V_O=1.4V to 11.4V Tmin ≤ T_A ≤ Tmax	50 25	100 -	- -	V/mV
Supply Voltage Rejection Ratio	SVR	V_{CC}=5V to 30V	65	100	-	dB
Input Common Mode Voltage Range	Vicm	V_{CC}=+30V (note1) Tmin ≤ T_A ≤ Tmax	0 0	- -	(V_{CC}^+)-1.5 (V_{CC}^+)-2.0	V
Common Mode Rejection Ratio	CMR	Tmin ≤ T_A ≤ Tmax	70 60	85 -	- -	dB
Output Current Source	I_{source}	V_{CC}=+15V, V_O=2V, V_{id}=+1V	20	40	-	mA
Short Circuit to Ground	I_o	V_{CC}=+15V	-	40	60	mA
Output Current Sink	I_{sink}	V_{CC}=+15V, V_O=2V, V_{id}=-1V	10	20	-	mA
High Level Output Voltage	V_{OH}	V_{CC}^+=30V, R_L=10k, T_A=25℃ Tmin ≤ T_A ≤ Tmax	27 27	28 -	- -	V
Low Level Output Voltage	V_{OL}	R_L=10k Tmin ≤ T_A ≤ Tmax	- -	5 -	20 20	mV
Slew Rate at Unity Gain	SR	V_i=0.5V to 3V, V_{CC}=15V, R_L=2k, C_L=100pF, Unity Gain	0.2	0.4	-	V/μs
Gain Bandwidth Product	GBP	V_{CC}=30V, R_L=2k, C_L=100pF f=100kHz, V_{in}=10mV	0.5	0.9	-	MHz
Total Harmonic Distortion	THD	V_{CC}=30V, R_L=2k, C_L=100pF V_O=2V_{PP}, f=1kHz, A_V=20dB	-	0.02	-	%

Note1: The common-mode voltage of either input signal voltage should not be allowed to go negative by more than 0.3V. The upper end of the common-mode voltage range is V_{CC}^+ -1.5V. But either of both input can go to +36V without damage.

Operator1 (op-amp with non-inverting input connected to the internal Vref)

V_{CC}^+=+5V, V_{CC}=Ground, V_O=1.4V T_A=25℃ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Offset Voltage	V_{io}	Vicm=0V, T_A=25℃ Tmin ≤ T_A ≤ Tmax	- -	0.5 -	3 5	mV
Input Offset Voltage Drift	DV_{io}		-	7	-	uV/℃
Input Bias Current	I_{ib}	Negative input	-	20	-	nA
Large Signal Voltage Gain	Avd	Vicm=0V V_{CC}=15V, R_L=2k	-	100	-	V/mV
Supply Voltage Rejection Ratio	SVR	Vicm=0V V_{CC}^+=5V to 30V	65	100	-	dB
Output Current Source	I_{source}	V_{CC}=+15V, V_O=2V, V_{id}=+1V	20	40	-	mA
Short Circuit to Ground	I_o	V_{CC}=+15V	-	40	60	mA
Output Current Sink	I_{sink}	V_{CC}=+15V, V_O=2V, V_{id}=-1V	10	20	-	mA
High Level Output Voltage	V_{OH}	V_{CC}^+=30V, R_L=10k, T_A=25℃ Tmin ≤ T_A ≤ Tmax	27 27	28 -	- -	V
Low Level Output Voltage	V_{OL}	R_L=10k Tmin ≤ T_A ≤ Tmax	- -	5 -	20 20	mV
Slew Rate at Unity Gain	SR	V_i=0.5V to 2V, V_{CC}=15V, R_L=2k, C_L=100pF, Unity Gain	0.2	0.4	-	V/μs
Gain Bandwidth Product	GBP	V_{CC}=30V, R_L=2k, C_L=100pF f=100kHz, V_{in}=10mV	0.5	0.9	-	MHz
Total Harmonic Distortion	THD	V_{CC}=30V, R_L=2k, C_L=100pF V_O=2V_{PP}, f=1kHz, A_V=20dB	-	0.02	-	%

Voltage Reference

Parameter	Symbol	Test Conditions	Value	Unit
Cathode Current	I_k		1 to 100	mA

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reference Input Voltage	V_{ref}	T_A=25℃ Tmin ≤ T_A ≤ Tmax	2.49 2.48	2.5 -	2.51 2.52	V
Reference Input Voltage Deviation Over Temp. Range	△V_{ref}	V_{KA}=V_{ref}, I_K=10mA , Tmin ≤ T_A ≤ Tmax	-	5	24	mV
Minimum Cathode Current for Regulation	I_{min}	V_{KA}=V_{ref}	-	0.5	1	mA
Dynamic Impedance (note2)	$\lvert Z_{KA} \rvert$	V_{KA}=V_{ref}, △I_K=1 to 100mA, f<1kHz	-	0.2	0.5	Ω

Note2: The Dynamic impedance is defined as $\lvert Z_{KA} \rvert = \triangle V_{KA} / \triangle I_K$

Characteristics Curve

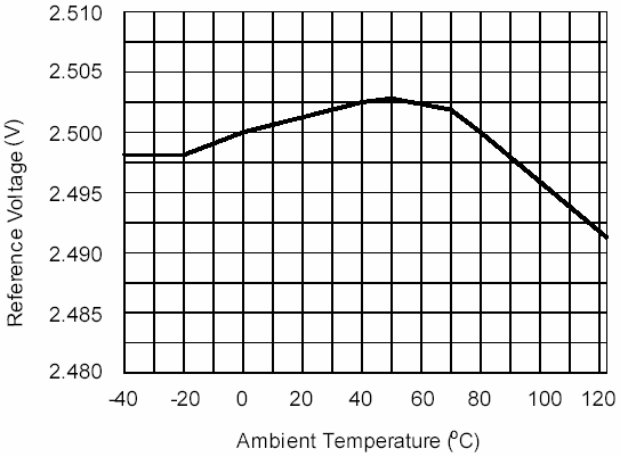


Fig 1. Reference Voltage vs. Ambient Temperature

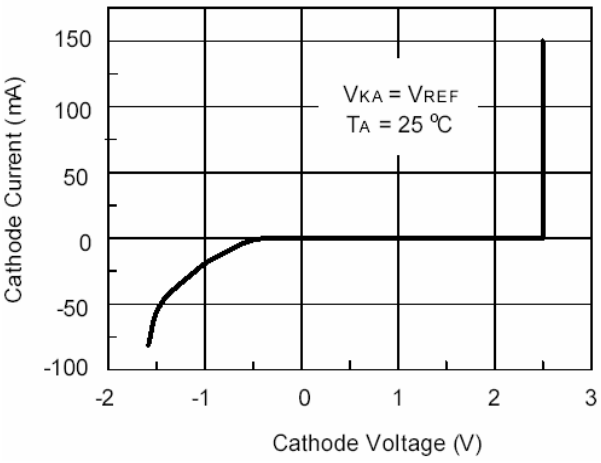


Fig 2. Cathode Current vs. Cathode Voltage

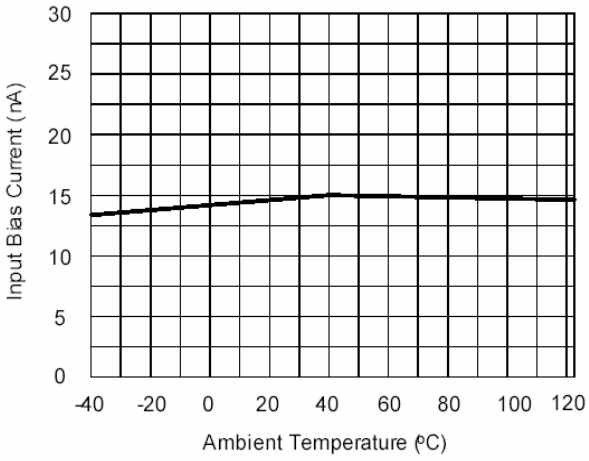


Fig 3. Input Bias Current vs. Ambient Temperature

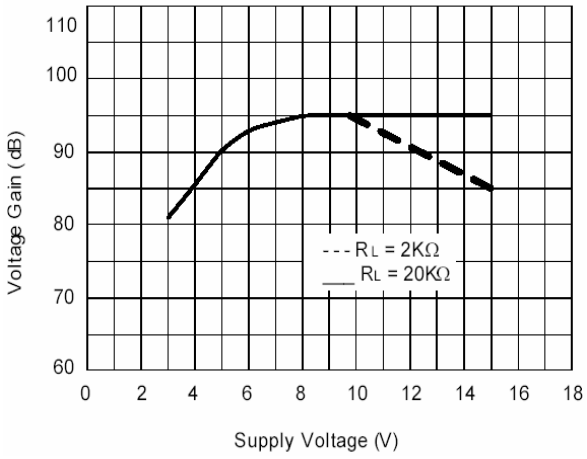


Fig 4. Operational Amplifier Voltage Gain

Important Notice:
- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:
- **Taiwan**: No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
  TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China**: (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
  TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165