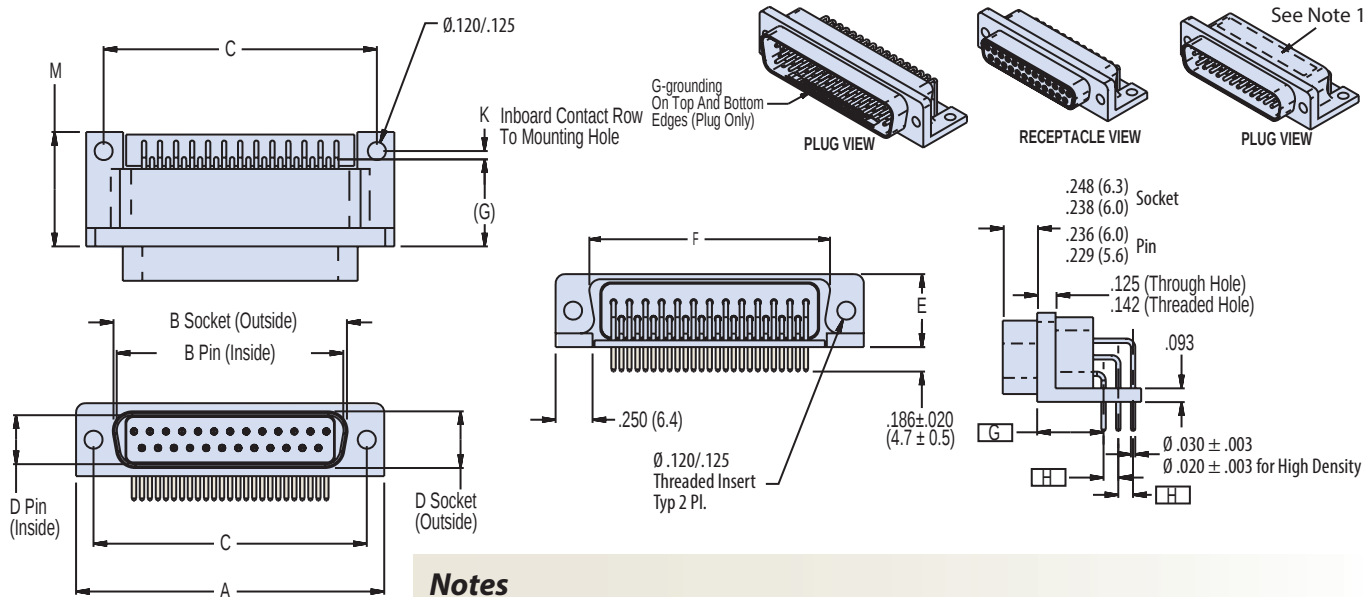


240-066
D-Subminiature Filter Connector
Right Angle PCB Contacts

How To Order Filter D-Subminiature Right-Angle Mount Connectors

[illegible]

E



**Table I: Capacitor Array Code
Capacitance Range**

Class	Pi - Circuit (pF)	C - Circuit (pF)
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300
J	70 - 120	35 - 60

Notes

1. Assembly to be identified with Glenair's name, part number, and date code space permitting
2. Dimensions B and D taken from inside of shell for Pin/Plug and outside for Socket/Receptacle.
3. Electrical Performance:
Dielectric Withstanding Voltage: 500 VDC
Insulation Resistance: 5,000 megohms @ 200 VDC
Current Rating Standard Density: 7.5 Amps max.
Current Rating High Density: 5 Amps max.

Materials/Finishes:

Insulators - High Grade Rigid Dielectric/N.A
Contacts - Copper Alloy/Gold Plated

Dimensions in inches (millimeters) and are subject to change without notice.

© 2013 Glenair, Inc.

U.S. CAGE Code 06324

Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-6 E-Mail: sales@glenair.com

240-066
D-Subminiature Filter Connector
Right Angle PCB Contacts



D-Subminiature
MIL-DTL-24308 Type

Table II: Dimensions

Shell Size	Number of Contacts		A	B	C	D	E	F
	STD	HD	±.015 (0.38)	±.005 (0.13)	±.005 (0.13)	±.005 (0.13)	±.015 (0.38)	Max
1	9P	15P	1.213 (30.8)	.666 (16.9)	.984 (25.0)	.329 (8.4)	.494 (12.5)	.769 (19.5)
	9S	15S	1.213 (30.8)	.643 (16.3)	.984 (25.0)	.311 (7.9)	.494 (12.5)	.769 (19.5)
2	15P	26P	1.541 (39.1)	.994 (25.2)	1.312 (33.3)	.329 (8.4)	.494 (12.5)	1.093 (27.8)
	15S	26S	1.541 (39.1)	.971 (24.7)	1.312 (33.3)	.311 (7.9)	.494 (12.5)	1.093 (27.8)
3	25P	44P	2.088 (53.0)	1.534 (39.0)	1.852 (47.0)	.329 (8.4)	.494 (12.5)	1.635 (41.5)
	25S	44S	2.088 (53.0)	1.511 (38.4)	1.852 (47.0)	.311 (7.9)	.494 (12.5)	1.635 (41.5)
4	37P	62P	2.729 (69.3)	2.182 (55.4)	2.500 (63.5)	.329 (8.4)	.494 (12.5)	2.282 (58.0)
	37S	62S	2.729 (69.3)	2.159 (54.8)	2.500 (63.5)	.311 (7.9)	.494 (12.5)	2.282 (58.0)
5	50P	78P	2.635 (66.9)	2.079 (52.8)	2.406 (61.1)	.441 (11.2)	.605 (15.4)	2.188 (55.6)
	50S	78S	2.635 (66.9)	2.064 (52.4)	2.406 (61.1)	.423 (10.7)	.605 (15.4)	2.188 (55.6)
6	X	104P	2.729 (69.3)	2.212 (56.2)	2.500 (63.5)	.503 (12.8)	.668 (17.0)	2.312 (58.7)
		104S	2.729 (69.3)	2.189 (55.6)	2.500 (63.5)	.486 (12.3)	.668 (17.0)	2.312 (58.7)

Table V: Dimensions


Contact Density	# of Contacts	Footprint Type	H Basic	K Basic	M ± .015	
					Pi Filter	C Filter
Standard Density	9-37	Mil-Aero	.112 (2.8)	.056 (1.4)	.777 (19.7)	.637 (16.2)
		Euro Style	.100 (2.5)	.050 (1.3)	.765 (19.4)	.625 (15.9)
	50	Mil-Aero	.112 (2.8)	.112 (2.8)	.889 (22.6)	.749 (19.0)
		Euro Style	.100 (2.5)	.100 (2.5)	.865 (22.0)	.725 (18.4)
High Density	15-62	Mil-Aero	.078 (2.0)	.078 (2.0)	.821 (20.9)	.681 (17.3)
		Euro Style	.100 (2.5)	.100 (2.5)	.865 (22.0)	.725 (18.4)
	78	Mil-Aero	.082 (2.1)	.123 (3.12)	.911 (23.1)	.771 (19.6)
		Euro Style	.100 (2.5)	.150 (3.81)	.965 (24.5)	.825 (21.0)
	104	Mil-Aero	.082 (2.1)	.200 (5.08)	1.065 (27.1)	.853 (21.7)
		Euro Style	.100 (2.5)	.164 (4.2)	.993 (25.2)	.925 (23.5)

Table III: Cut-Out Dimensions

Shell Size	N BSC	P Min	R Min
1	.984 (25.0)	.396 (10.1)	.735 (18.7)
2	1.312 (33.3)	.396 (10.1)	1.060 (26.9)
3	1.852 (47.0)	.396 (10.1)	1.603 (40.7)
4	2.500 (63.5)	.396 (10.1)	2.251 (57.2)
5	2.406 (61.1)	.510 (13.0)	2.148 (55.0)
6	2.500 (63.5)	.630 (16.0)	2.276 (57.8)

Table IV: Panel Thickness


Panel Code	Panel Thickness	S	T
R1	.031 (0.79)	N/A	N/A
R2	.047 (1.19)	.156/.199 (4.0/5.1)	.005 (0.13)
R3	.062 (1.57)	.156/.199 (4.0/5.1)	.020 (0.50)
R4	.093 (2.36)	.156/.199 (4.0/5.1)	.051 (1.30)
R5	.104 (2.64)	.156/.199 (4.0/5.1)	.061 (1.55)
R6	.125 (3.18)	.156/.199 (4.0/5.1)	.082 (2.08)
R7	.156 (3.96)	.156/.199 (4.0/5.1)	.114 (2.90)

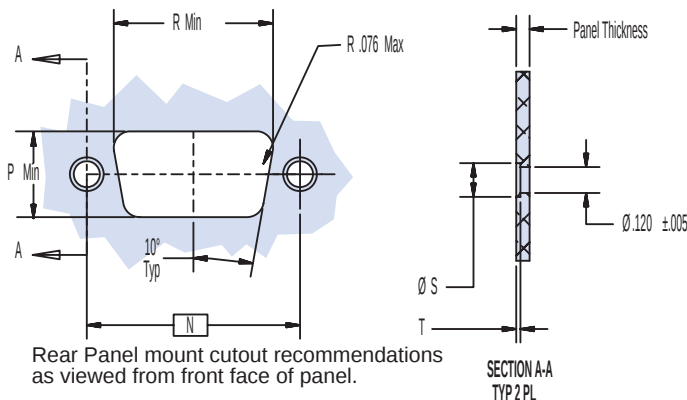

Dimensions in inches (millimeters) and are subject to change without notice.

D-Subminiature Filter Connector

Right Angle PCB Contacts • Connector Footprints

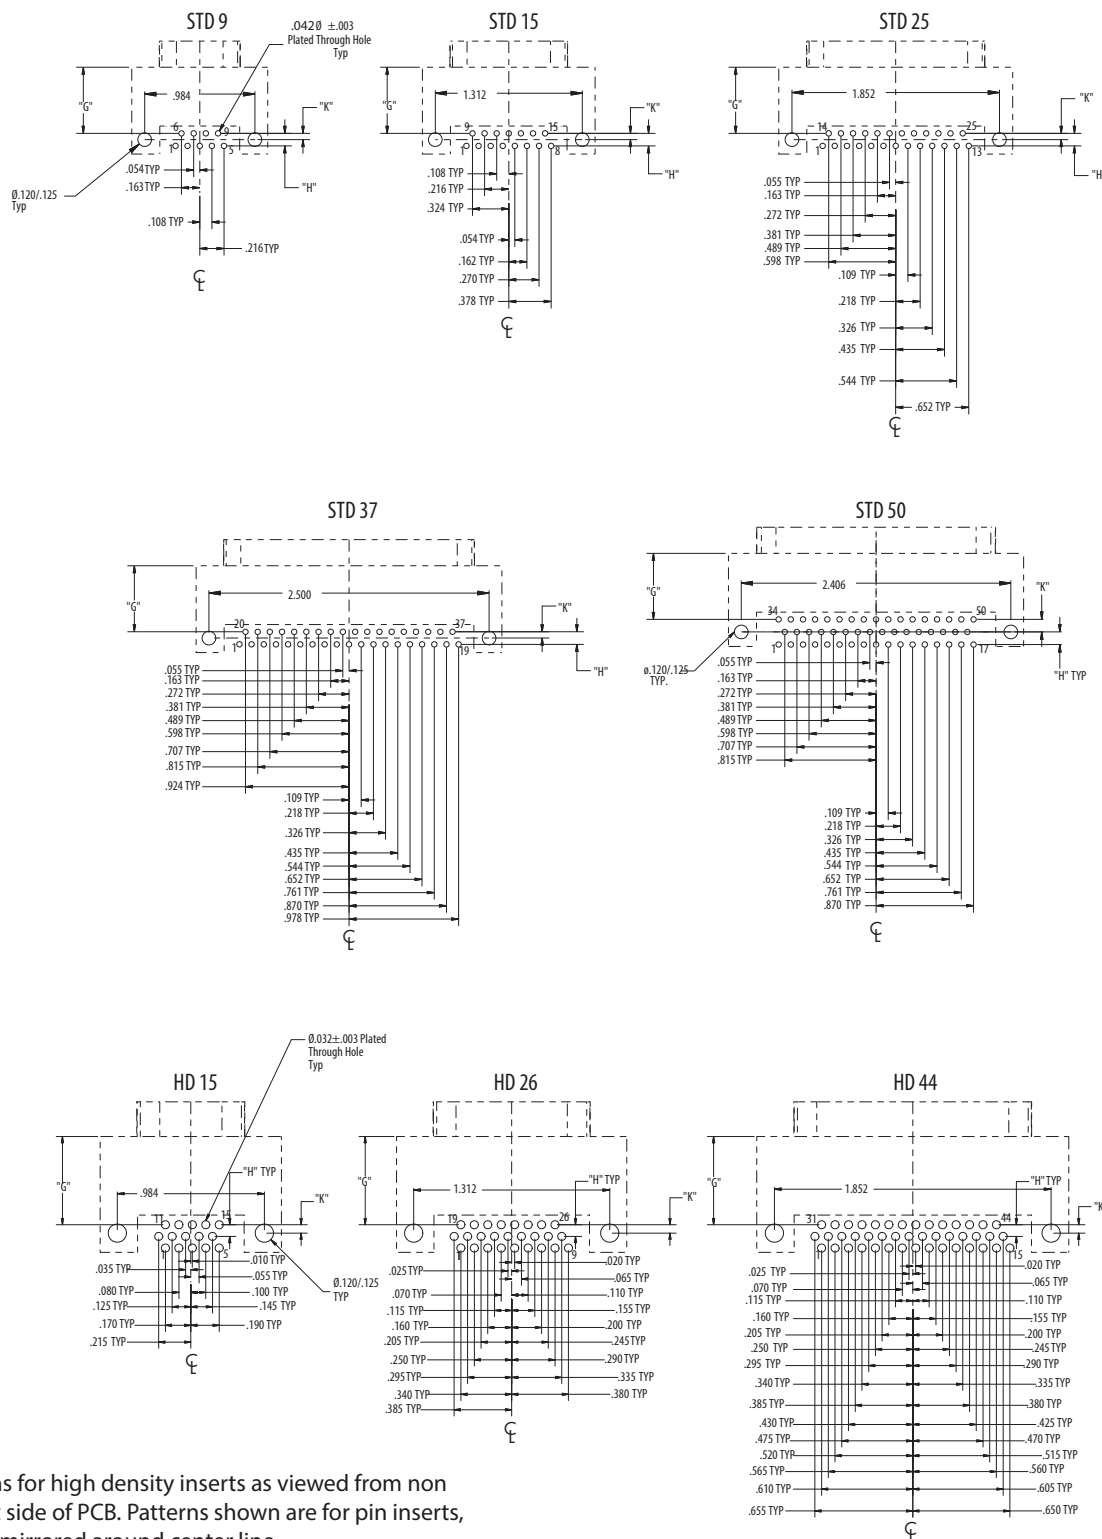

PCB patterns for high density inserts as viewed from non component side of PCB. Patterns shown are for pin inserts, sockets are mirrored around center line.

Dimensions in inches (millimeters) and are subject to change without notice.

© 2013 Glenair, Inc.

U.S. CAGE Code 06324

Printed in U.S.A.


240-066

D-Subminiature Filter Connector

Right Angle PCB Contacts • Connector Footprints



D-Subminiature
MIL-DTL-24308 Type

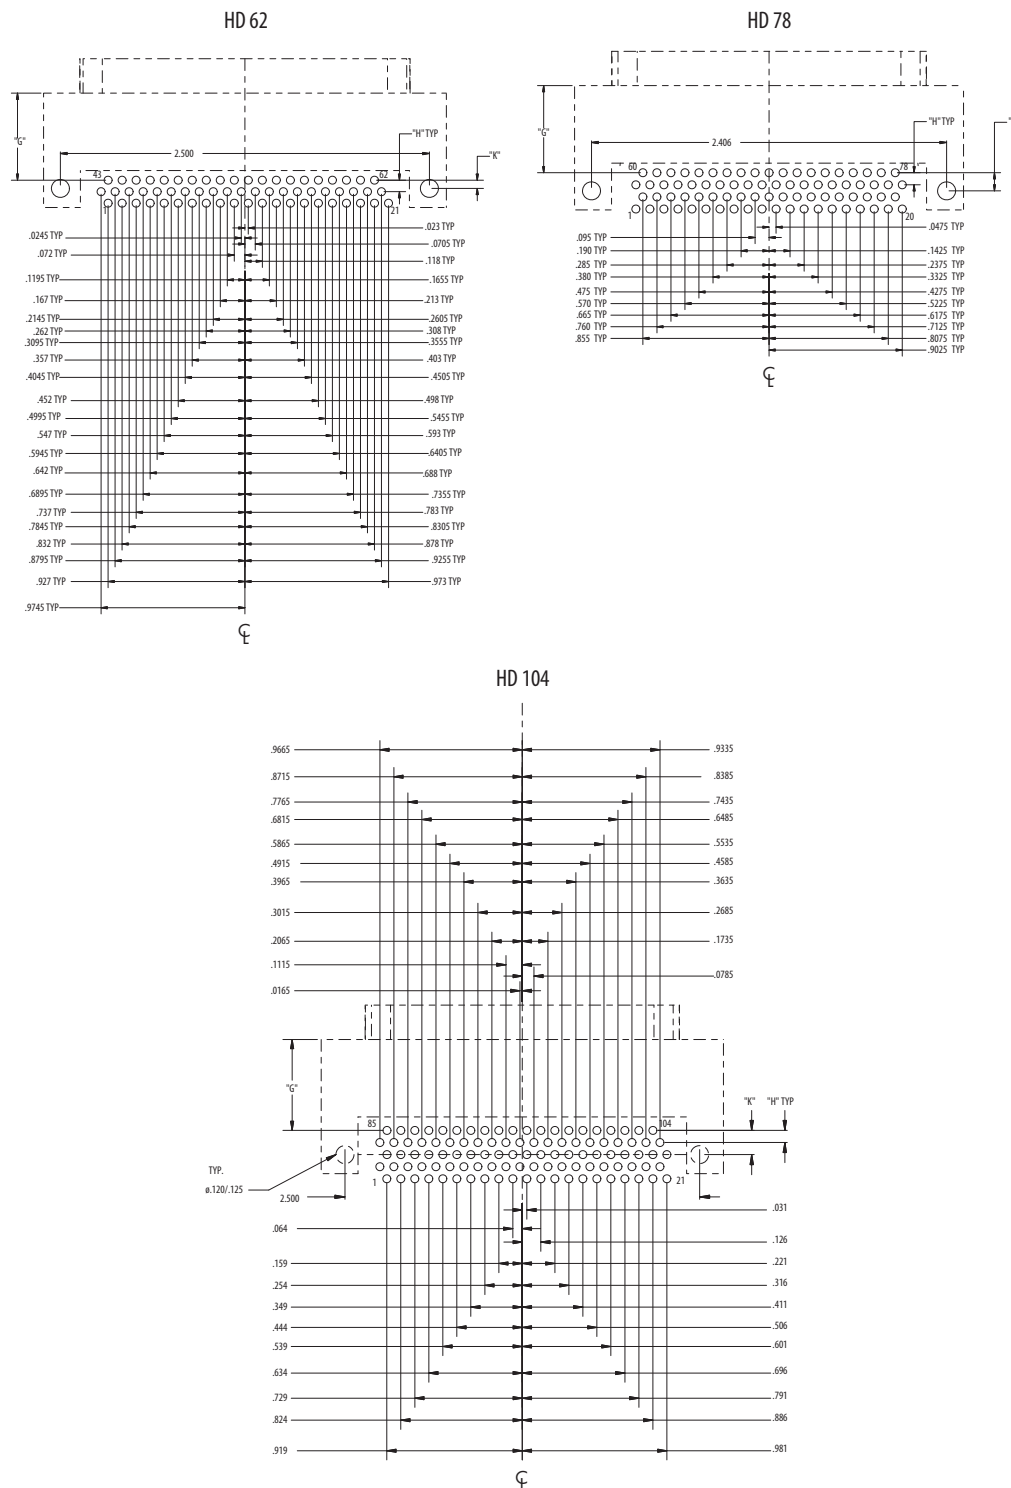

Dimensions in inches (millimeters) and are subject to change without notice.

© 2013 Glenair, Inc.

U.S. CAGE Code 06324

Printed in U.S.A.

GLENAIR, INC. • 1211 AIR WAY • GLENDALE, CA 91201-2497 • 818-247-6000 • FAX 818-500-9912
www.glenair.com E-9 E-Mail: sales@glenair.com