
Pomona®

Model 2401
Size A Aluminum Box With Cover
BNC TEE F-F-M

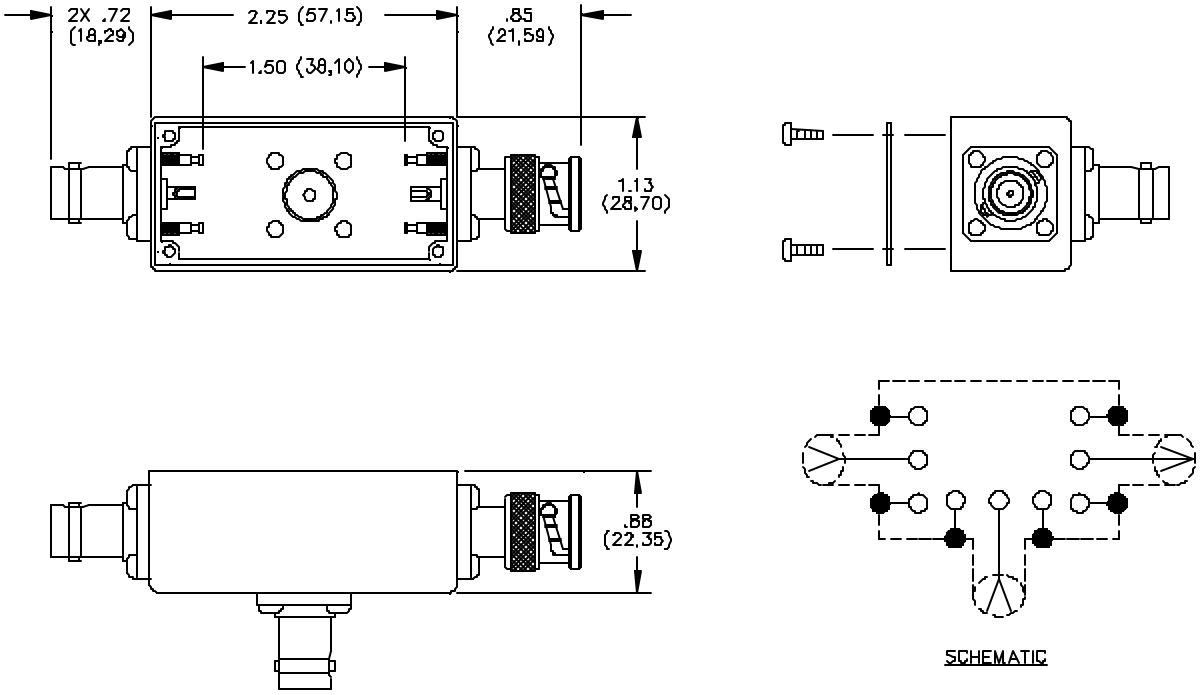

MATERIALS:
Connector: BNC (M) and BNC (F)
Body: Tarnish Resistant Plating, Center Contact: Female - Gold Plated Beryllium Copper, Male – Gold Plated Brass
Solder Turret Terminal Screws: Steel
Shielded Housing: Die cast aluminum alloy A380 or A384
Finish: Blue baked enamel per Federal Standard 595 #25109 over Phosphoric Etch per MIL-C-15328
Marking: "Pomona Electronics Calif."
Cover: 1.02.(040) thick aluminum #1100-H14 anodized
Marking "Pomona 2401"
Screws: Steel 4 ea. #2-32 x ¼" Pan Head self-tapping

RATINGS:
Operating Voltage: Inner conductor/Shield: 500 VRMS Max.
Operating Temperature: -55ºC to +150ºC
Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 2401

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060