

Variable RF Inductor

2428

- ◆ Operated frequency: 400 MHz
- ◆ Q value: 65(no core) , 54(full core)
- ◆ Inductance tuning range: 50 to 64(nH)
- ◆ Core material: Aluminum
- ◆ SRF: 820 MHz
- ◆ Operating temperature: -40°C~+125°C
- ◆ Rotation times(min): 100



Features


- SMD package, able to be mounted or soldered on the PCB.
- High temperature resistant, operating temperature: -40°C~+125°C.
- Keep excellent & stable performance at high temperature.
- Operated in RF frequency band.
- High Q value.
- Good air tightness to realize high Q value.
- Small size: 5×5×3(mm).
- Easy to adjust.
- Core material: Aluminum or Ferrite.
- Termination: RoHS compliant tin over copper.

Applications

- RF Impedance Matching
- Tunable Antennas
- Tuning Resonant Circuit
- Tunable Filter
- Phase Shifter
- Phased Array Radar
- MRI(Magnetic Resonance Imaging)
- NMR(Nuclear Magnetic Resonance)
- Crystal Oscillator
- Broadband Antenna

Characteristic

Typical Q and L vs frequency

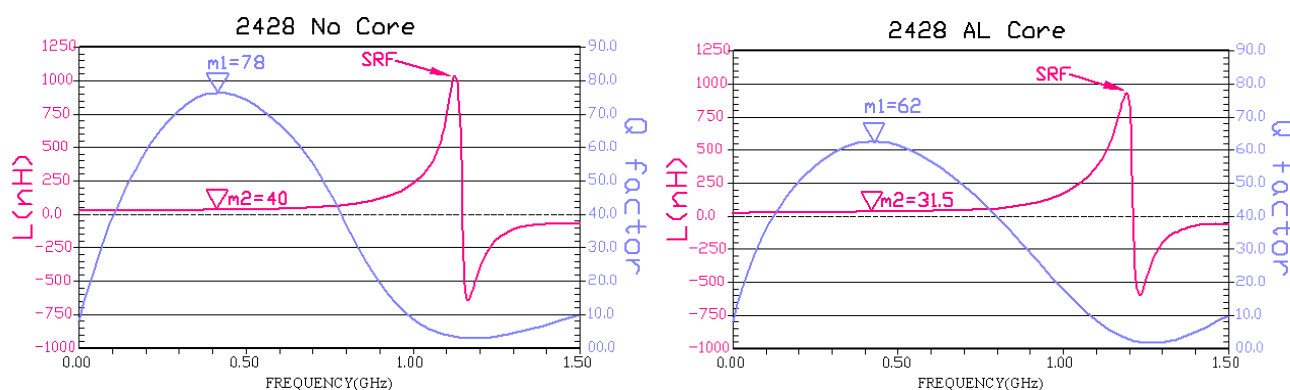


Part No.	No core		At L max		At L min		Freq (MHz)	No core SRF min(MHz)	Irms (A)
	L(nH)	Q min	L(nH)	Q min	L(nH)	Q min			
2428	64	65	64	65	50	54	400	820	3.2

Notes:

1. Operating frequency is based on the half of the maximum Q value.

Inductance VS The height of the core rotation

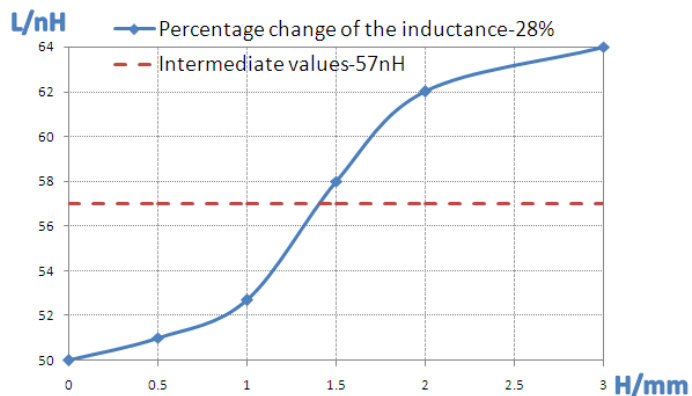


Notes

1. H represents the height of Al core rotation, H max=3mm.
2. Inductance changes around the intermediate value.


Package Outlines

All dimensions shown in mm unless stated otherwise

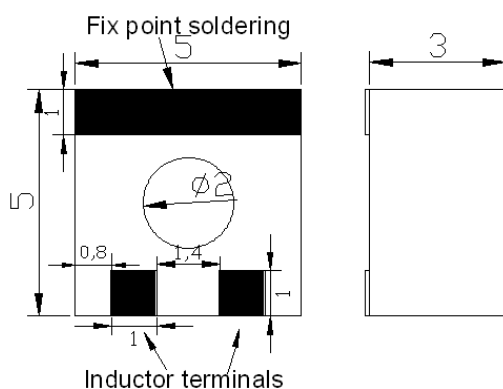

Recommended Layout

All dimensions shown in mm unless stated otherwise

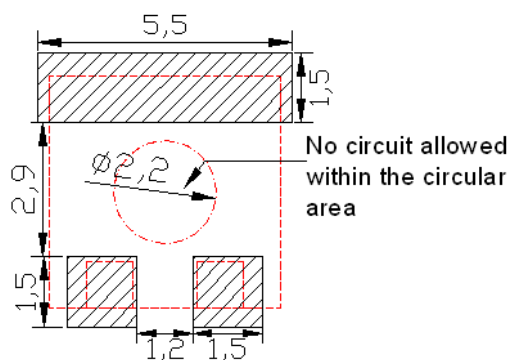

Tape and Reel Drawing

