Lumberg
passion for connections

24 2431


USB and IEEE 1394 connectors




USB 2.0 connecting cable, type A plug to type B plug


State: Active

24 2431

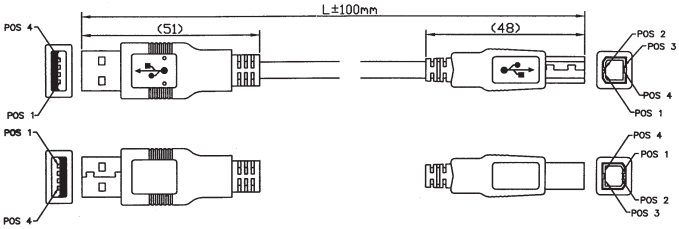

2431 01	UL2725 AWG28 x 1P + AWG24 x 2C + Al-Foil + Drain + Braid
2431 02	UL2725 AWG28 x 1P + AWG24 x 2C + Al-Foil + Drain + Braid
2431 03	UL2725 AWG28 x 1P + AWG24 x 2C + Al-Foil + Drain + Braid
2431 05	UL2725 AWG28 x 1P + AWG20 x 2C + Al-Foil + Drain + Braid



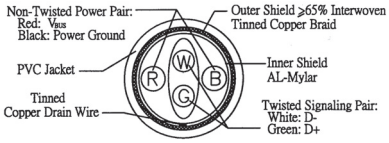

Materials

Overmolding/handle	PVC

Connected cable

Construction	USB 2.0 high/full speed UL2725 28 AWG x 1P + 20 AWG x 2C + Al-foil + drain + braid

Electrical data (at T_{amb} 20 °C)

Rated current	1 A
Rated voltage	30 V AC

Associated products

Counterparts

- 1673 01
- 2410 01
- 2410 02
- 2410 03
- 2410 05
- 2410 06
- 2410 09
- 2411 01
- 2411 02
- 2411 03
- 2420 01
- 2420 02
- 4512

24 2431

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
2431 01	4	100	200	1000
2431 02	4	100	200	2000
2431 03	4	50	200	3000
2431 05	4	50	200	5000

Packaging:
in bulk, in a cardboard box or a plastic bag