

24 2480


USB and IEEE 1394 connectors



USB 2.0 connecting cable, type A plug 4 pole to mini type
B plug 5 poles

State: Active

24 2480

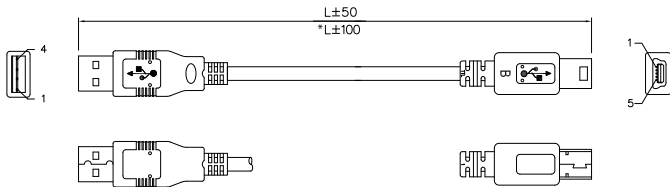

2480 01	UL2725 AWG28 (50 Ω each/100 Ω pair) + AWG28 x 2C + Al-Foil + Drain + Braid
2480 02	UL2725 AWG28 (50 Ω each/100 Ω pair) + AWG28 x 2C + Al-Foil + Drain + Braid
2480 03	UL2725 AWG28 (50 Ω each/100 Ω pair) + AWG26 x 2C + Al-Foil + Drain + Braid

USB-A/M	MINI USB-B/M
1 RED	1
2 WHITE	2
3 50 Ω each (Total 100 Ω pair)	3
4 GREEN	5
5 BLACK	
SHELL	BRAID SHELL

Materials

Overmolding/handle	PVC
--------------------	-----

Connected cable

Construction	UL2725 28 AWG x 1P + 28 AWG x 2C + Al-foil + drain + braid, PVC jacket
--------------	--

Electrical data (at T_{amb} 20 °C)

Rated current	1 A
Rated voltage	30 V AC

Associated products

Counterparts

☞ 1673 01	☞ 2410 01	☞ 2410 02
☞ 2410 03	☞ 2410 05	☞ 2410 06
☞ 2410 09	☞ 2420 01	☞ 2420 02
☞ 2486 01	☞ 2486 03	☞ 4512

24 2480

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
2480 01	4/5	400	400	1000
2480 02	4/5	200	200	2000
2480 03	4/5	150	100	3000

Packaging:

in bulk, in a cardboard box or a plastic bag