
# SAW Bandpass Filter 250453B

## 1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

## 2. Package Dimension

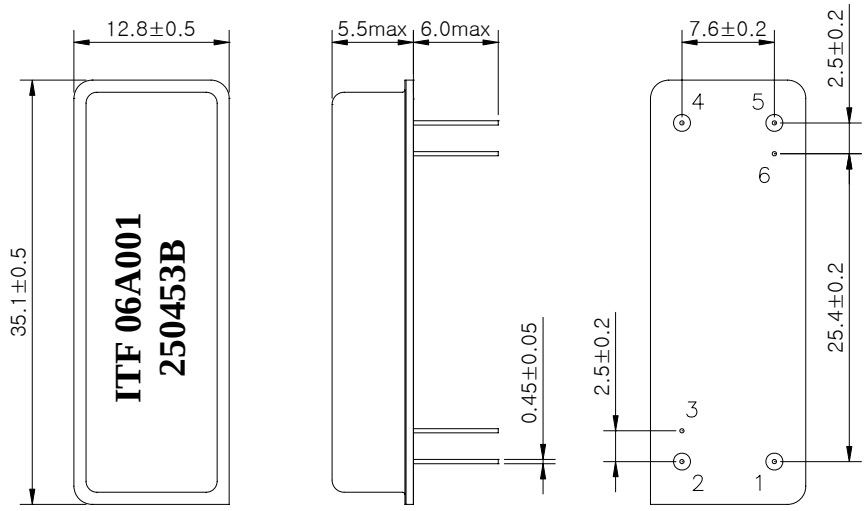


**Package : D3512**

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated
Cap : Cu & Cr Alloy, Ni Plated
Termination : Kovar, Au Plated

| **Pin Configuration** | |
|---|---|
| 1 | Input |
| 5 | Output |
| 2, 4 | Ground |
| 3, 6 | Case ground |

## 3. Specifications

Fo = 115.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network


| | | Minimum | Typical | Maximum |
|---|---|---|---|---|
| Center Frequency | MHz | - | 115.0 | - |
| Insertion Loss | dB | - | 23.0 | 25.0 |
| 1dB Bandwidth | MHz | - | 4.29 | - |
| 3dB Bandwidth | MHz | - | 4.5 | - |
| 40dB Bandwidth | MHz | - | 5.47 | 5.6 |
| Amplitude Ripple (Fo +/- 1.9 MHz) | dB | - | 0.5 | 1.0 |
| Group Delay Variation (Fo +/- 1.9 MHz) | nsec | - | 150 | 200 |
| Absolute Delay | usec | - | 2.68 | - |
| Ultimate Rejection | dB | 45 | 50 | |
| Temperature Coefficient of Frequency | ppm/°C$^2$ | - | -0.03 | - |

**Notes :**

1) All specifications are based on the matching schematic shown below
2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
3) All attenuation measurements are measured relative to insertion loss

## 4. Matching Schematic

( Actual matching values may vary due to PCB layout and parasitics )

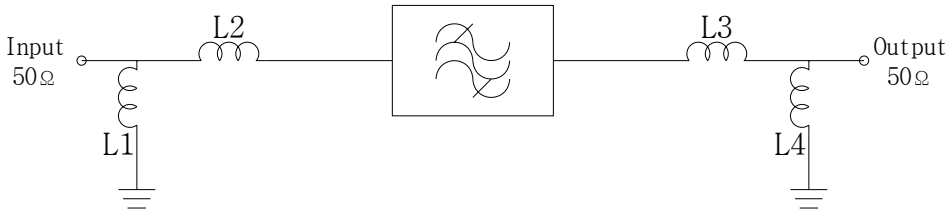


L1 = 33 nH,  L4 = 27 nH

L2 = L3 = 100 nH

## 5. Marking Configuration

ITF[1] 06A001[2]


250453B[3]


1) Manufacturer name

2) Lot Number

3) Part Number

## 6. Typical Performance ( at +25℃ )

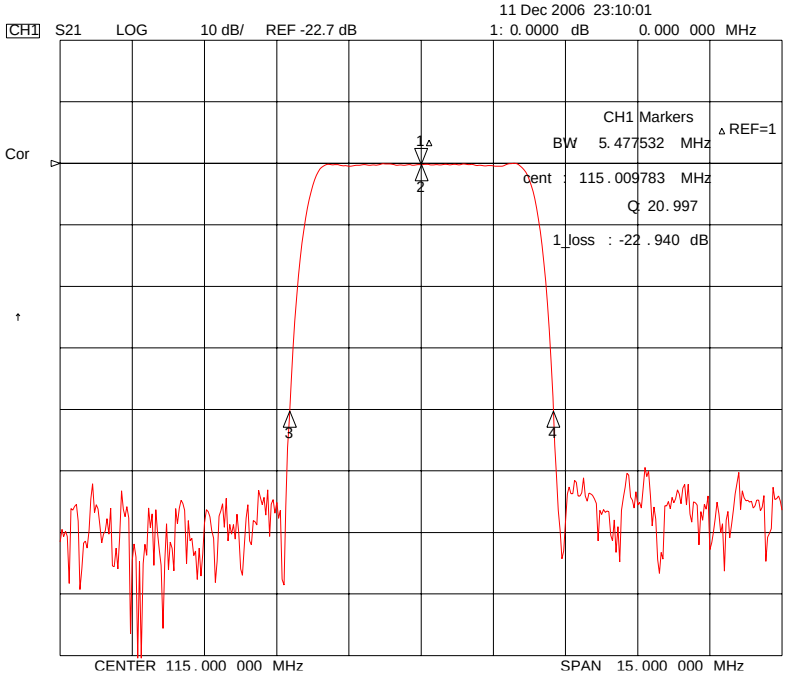
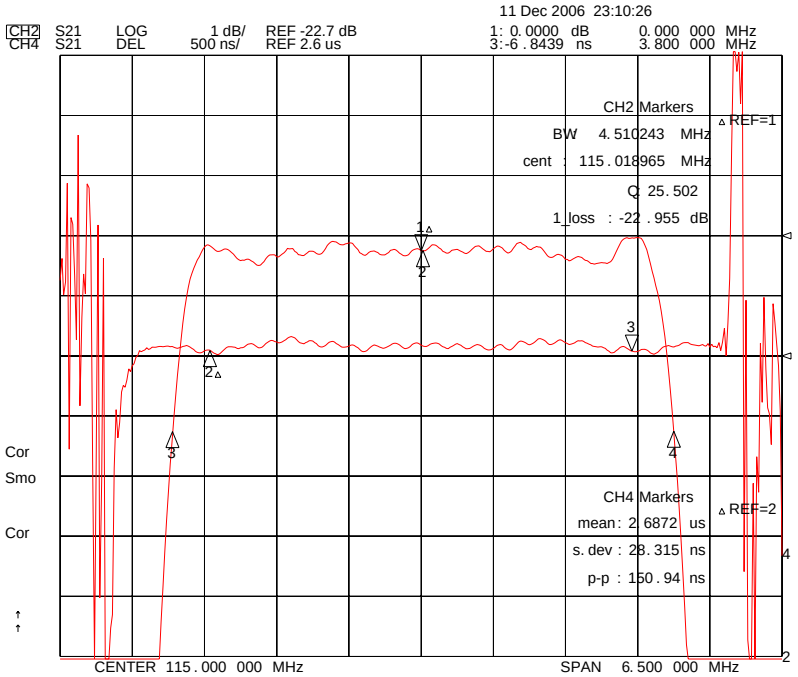
# SAW Bandpass Filter 250453B

