


SMD Power Inductor

252010CDMCD/DS



Description

- Metal compound molding type construction
- Magnetically shielded
- Low audible core noise
- Suitable for large current.
- L×W×H:2.7×2.2×1.0mm Max.
- Product weight: 0.31mg (Ref.)
- Moisture Sensitivity Level: 1



Environmental Data

- Operating temperature range: -55°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -55°C~+125°C


Packaging

- Carrier tape and reel packaging.
- 3000Pcs per reel

Applications

- DC/DC converter for CPU in Notebook PC. Smartphones, LCD displays, HDDs, DVDs, DVCs, DSCs, PDAs ect..
- Thin type on-board power supply module for exchanger VRM for server.
- Low profile, high current power supplies
- Battery powered devices

Dimension - [mm]

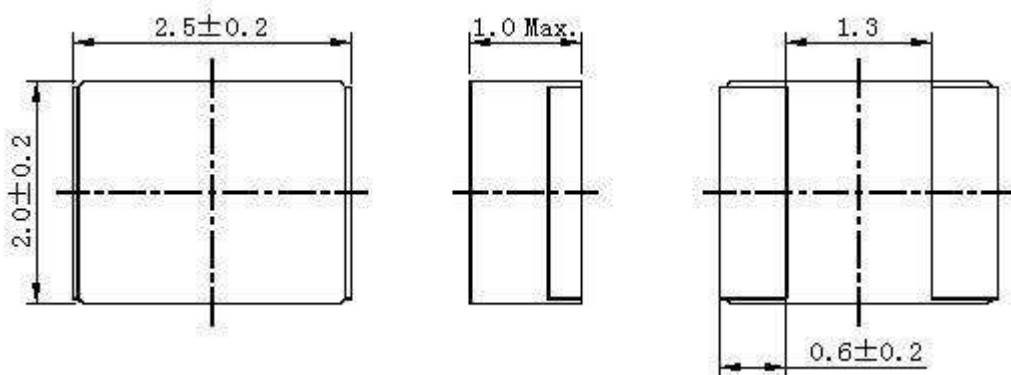


SMD Power Inductor


252010CDMCD/DS



Recommended Land pattern - [mm]



Wire Connection

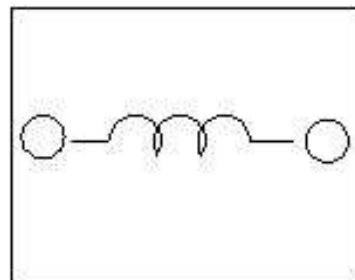

SMD Power Inductor

252010CDMCD/DS



Electrical Characteristics

Part Number	Inductance [Within] (μ H) ※1	D.C.R. at 20°C max(typ) (m Ω)	Saturation Current at 20°C(A) ※2	Temperature Rise Current (A) ※3
252010CDMCDDS-R47MC	0.47 $\pm$ 20%	21.00 (17.00)	6.10	6.00
252010CDMCDDS-R68MC	0.68 $\pm$ 20%	37.00 (31.00)	4.40	4.20
252010CDMCDDS-1R0MC	1.00 $\pm$ 20%	48.00 (40.00)	4.00	4.00
252010CDMCDDS-1R5MC	1.50 $\pm$ 20%	72.00 (60.00)	2.90	3.00
252010CDMCDDS-2R2MC	2.20 $\pm$ 20%	97.00 (85.00)	2.60	2.50



※1 Measuring frequency Inductance at 1MHz,0.1V

※2 Saturation current: This indicates the actual actual value of D.C. current when the inductance becomes 30% lower than its initial value.

※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes

$\Delta T=40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$). (Test board condition: FR4, Copper=70 μ m, four-layer PWB t=1.6mm)

Solder Reflow Condition

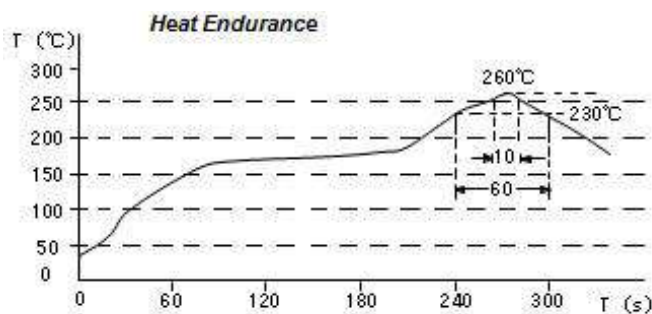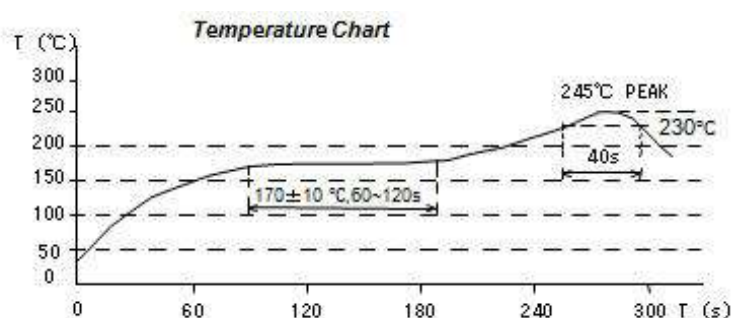

SMD Power Inductor


252010CDMCD/DS




Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT


1. 252010CDMCDDS-R47MC

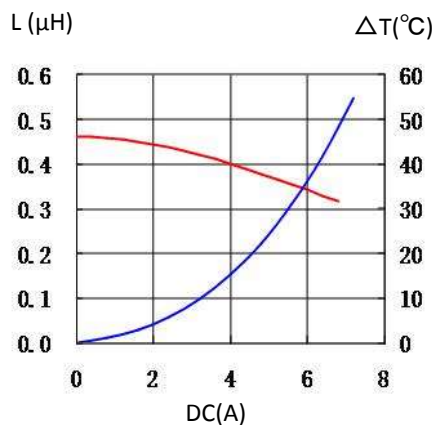


2. 252010CDMCDDS-R68MC

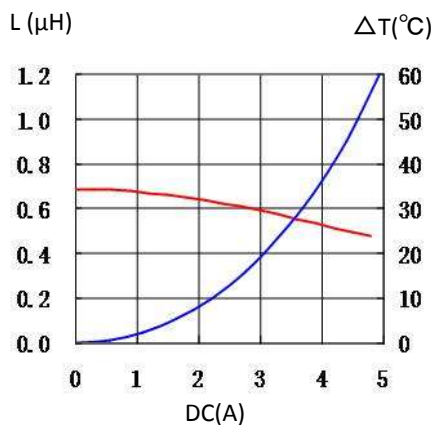


3. 252010CDMCDDS-1R0MC

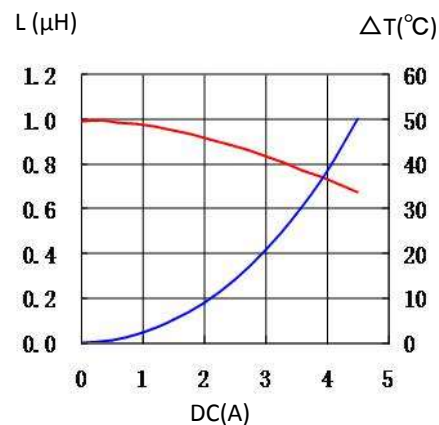

4. 252010CDMCDDS-1R5MC

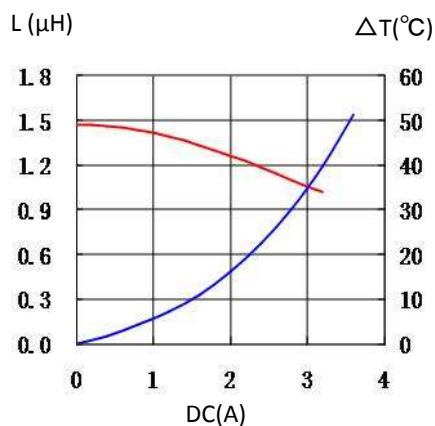

5. 252010CDMCDDS-2R2MC

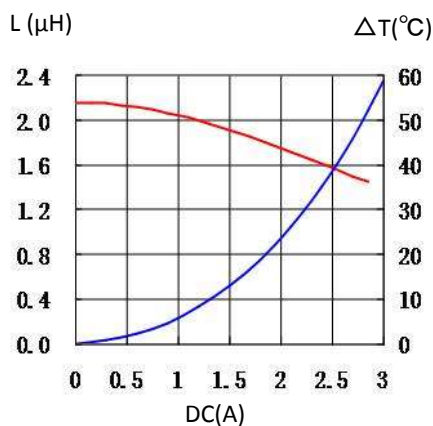

For sales office information, please [click here](#) to visit our website.