

DESCRIPTION: 2MM DUAL ROW RECEPTACLE


"L" = NO. OF CONTACTS PER ROW X .079

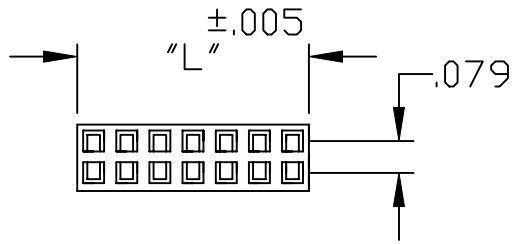

MATERIAL:
- HOUSING: NYLON 6T (UL 94V-0) BLACK
- CONTACT: PHOSPHOR BRONZE
- PLATING: GOLD FLASH MATING SIDE
  100u" TIN ON BOARD SIDE
- RoHS COMPLIANT

ELECTRICAL:
- CURRENT RATING: 1 AMP
- CONTACT RESISTANCE: 20 mOHM MAX.
- INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
- DWV: 500V AC
- OPERATING TEMP:
  -40°C TO +105°C
- PROCESS TEMP: 260°C FOR 10 SECONDS

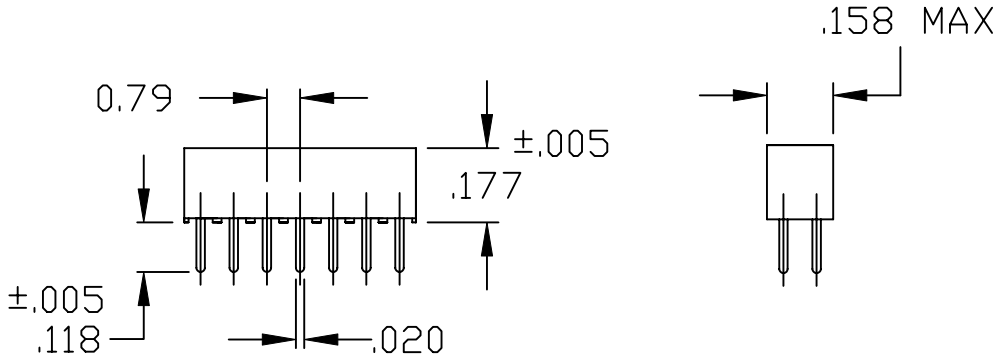

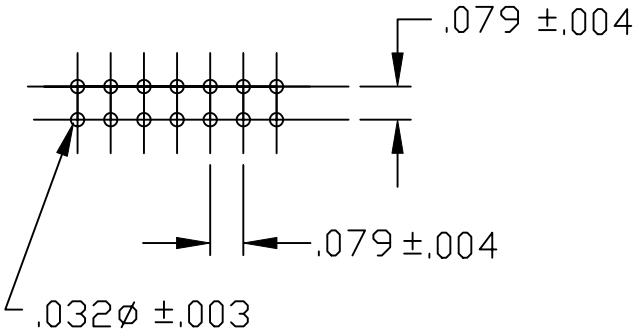

2564 YY 01RP2

SERIES
2564 = DUAL ROW

POSITIONS
DUAL = INCREMENTS OF 2
(06 TO 80)

TYPE:
01 = STRAIGHT

PLATING:
P2 = GOLD FLASH

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS	DATE: 1-30-06
CHECKED:	DATE:
SCALE: NTS	SHEET 1 OF 1
REV 2	
DWG NO. 2564YY01RP2	

NorComp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

25640801RP2 25640401RP2 25640601RP2 25641001RP2 25641201RP2 25641401RP2 25641601RP2 25641801RP2 25642001RP2 25642201RP2 25642401RP2 25643001RP2 25645001RP2 25647201RP2 2664-06-01RP2