
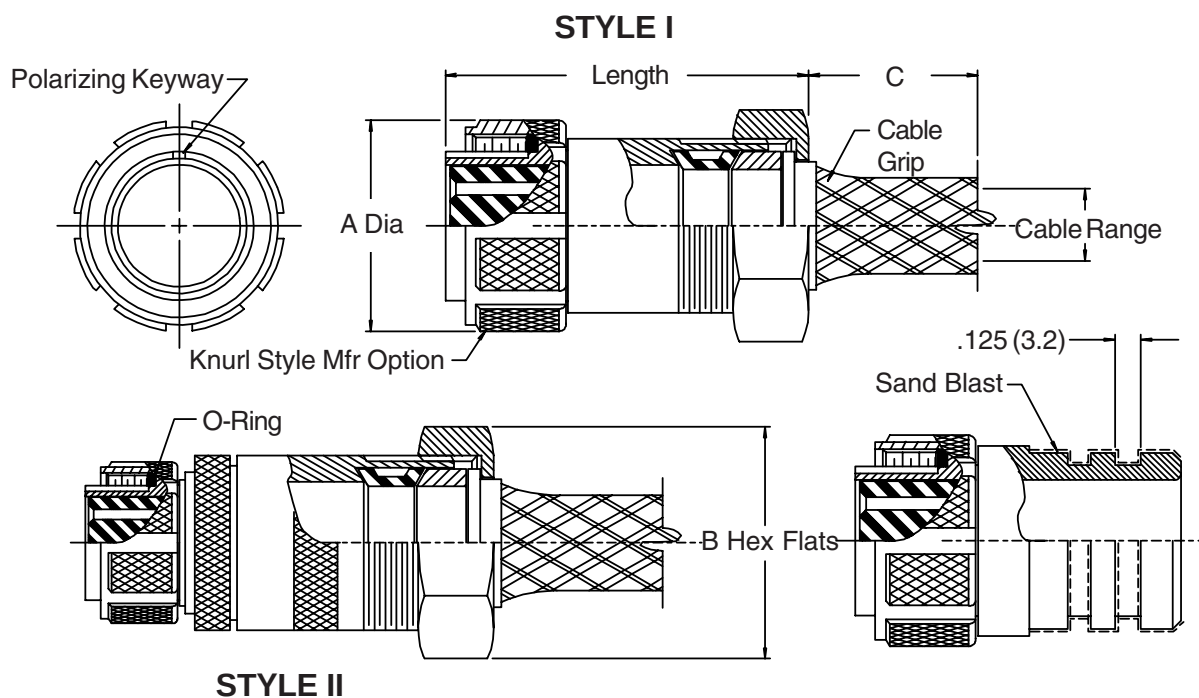


257-007 Connector Plug Assembly Stainless Steel Harsh Environment

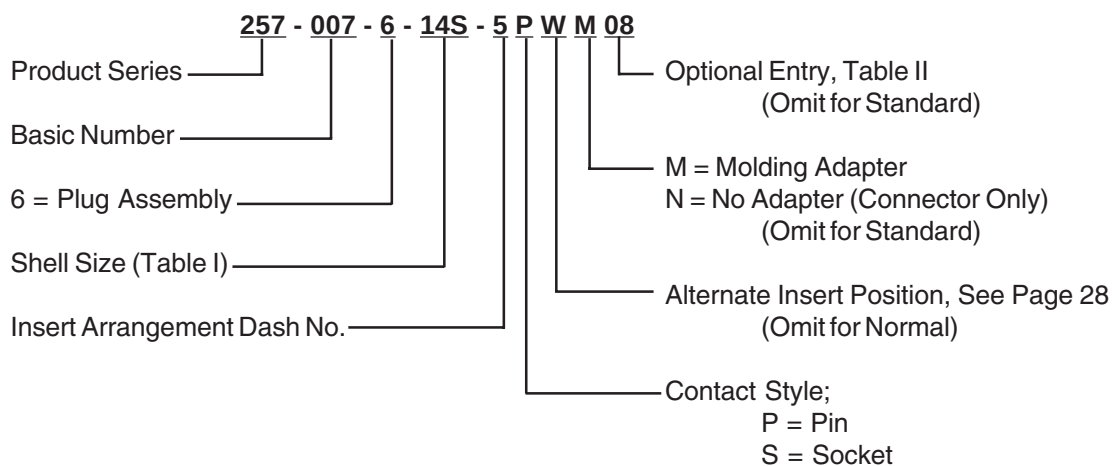

257-007
Connector Plug Assembly
Stainless Steel Harsh Environment



TABLE I

Shell Size	A Max	B Flats	Standard Cable Range				Config. Style	Max Cable Entry (Table II)	Length Max
			Min		Max				
10SL	1.031 (26.2)	.870 (22.1)	.210 (5.3)	.312 (7.9)	I	04	3.000 (76.2)		
12	1.125 (28.6)	1.250 (31.8)	.500 (12.7)	.625 (15.9)	II	08	3.000 (76.2)		
14S	1.219 (31.0)	.870 (22.1)	.210 (5.3)	.312 (7.9)	I	10	3.000 (76.2)		
18	1.406 (35.7)	1.000 (25.4)	.310 (7.9)	.438 (11.1)	I	12	3.000 (76.2)		
20	1.531 (38.9)	1.380 (35.1)	.530 (13.5)	.750 (19.1)	I	14	3.500 (88.9)		
24	1.781 (45.2)	1.380 (35.1)	.530 (13.5)	.750 (19.1)	I	16	3.500 (88.9)		
28	2.031 (51.6)	1.380 (35.1)	.530 (13.5)	.750 (19.1)	I	16	3.500 (88.9)		

TABLE II

Dash No.	C Ref	Cable Range			
		Min		Max	
03	5.120 (130.0)	.180 (4.6)	.210 (5.3)		
04	5.750 (146.1)	.210 (5.3)	.312 (7.9)		
06	7.000 (177.8)	.310 (7.9)	.438 (11.1)		
08	7.120 (180.8)	.438 (11.1)	.500 (12.7)		
10	7.370 (184.3)	.500 (12.7)	.625 (15.9)		
12	9.000 (228.6)	.530 (13.5)	.750 (19.1)		
14	8.000 (203.2)	.750 (19.1)	.875 (22.2)		
16	9.000 (228.6)	.875 (22.2)	1.000 (25.4)		

1. Metric dimensions (mm) are indicated in parentheses.
2. Electrical safety limits must be established by the user. Peak voltages, switching surges, etc., should be used to determine the safety of the application.