

Surface Mount Power Splitter/Combiner

2 Way-0° 50Ω 3 to 750 MHz

JPS-2-1W+
JPS-2-1W



CASE STYLE: BH292


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	1
PORT 1	3
PORT 2	4
GROUND	6
NOT USED	2,5

Outline Drawing

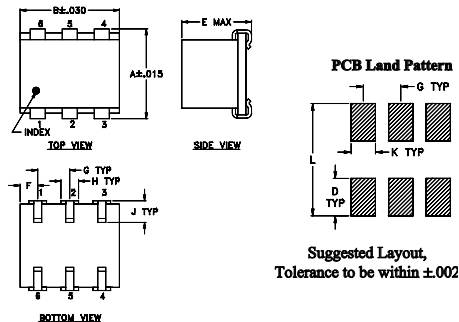


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-48+ Suggested PCB Layout (PL-035)

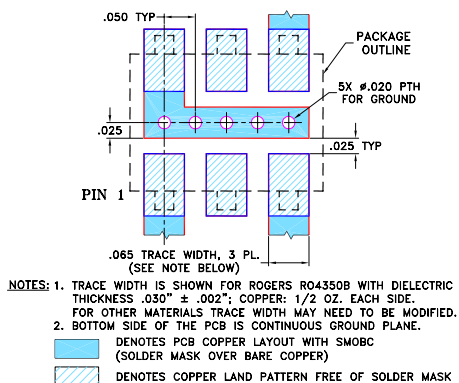

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.4 dB typ.
- excellent insertion loss flatness, 0.2 dB peak to peak typ.
- excellent amplitude unbalance, 0.05 dB typ.
- very good phase unbalance, 0.1 deg. typ.
- excellent VSWR, 1.1:1 typ. all ports.
- J-leads for excellent solderability and strain relief

Applications

- UHF/VHF
- instrumentation
- communications systems

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
f _L -f _U	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
3-750	36	20	28	17	19	16	0.5	1.0	0.4	1.0	0.9	1.4	1.0	2.0	4.0	0.2	0.3	0.4

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
3.00	3.57	3.57	0.00	31.30	0.00	1.13	1.35	1.35
5.00	3.46	3.46	0.00	35.31	0.01	1.11	1.29	1.29
10.00	3.38	3.38	0.00	37.17	0.02	1.11	1.24	1.24
22.00	3.36	3.36	0.00	36.06	0.06	1.10	1.23	1.23
40.00	3.38	3.39	0.01	34.66	0.08	1.11	1.22	1.22
100.00	3.38	3.38	0.00	30.08	0.27	1.12	1.22	1.22
250.00	3.53	3.52	0.01	23.73	0.49	1.17	1.22	1.22
375.00	3.63	3.61	0.03	21.42	0.73	1.20	1.21	1.21
440.00	3.66	3.63	0.03	20.84	0.85	1.21	1.20	1.21
500.00	3.73	3.68	0.06	20.52	0.84	1.21	1.19	1.20
560.00	3.77	3.70	0.07	20.46	0.93	1.21	1.18	1.18
620.00	3.79	3.70	0.09	20.69	0.88	1.20	1.17	1.17
660.00	3.86	3.73	0.13	21.04	0.90	1.18	1.17	1.16
700.00	3.87	3.73	0.14	21.60	0.89	1.17	1.16	1.15
750.00	3.93	3.77	0.16	22.58	0.83	1.14	1.16	1.13

1. Total Loss = Insertion Loss + 3dB splitter loss.

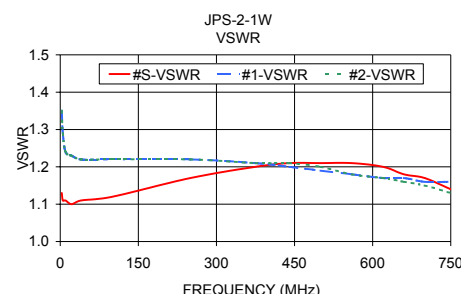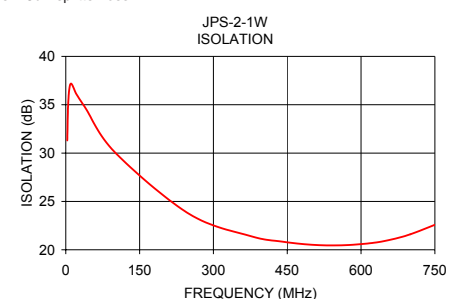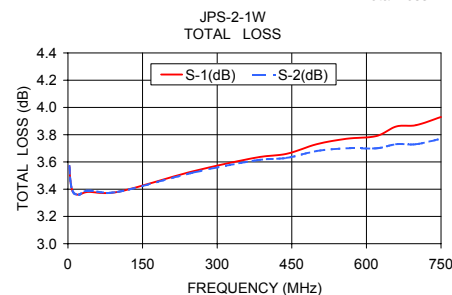

electrical schematic



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M151752
JPS-2-1W
ED-8013/1
DY/TD/CP/AM
150629