

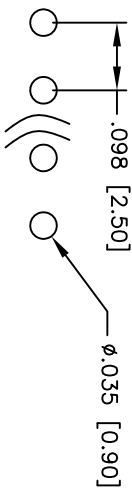
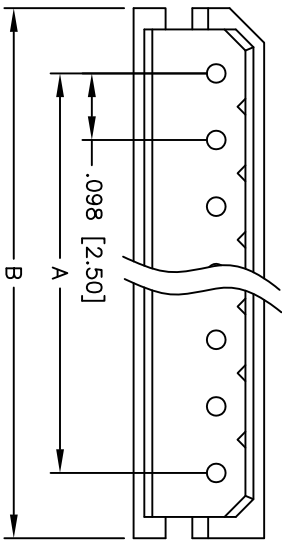


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/10/09	
A		REVISED DIM.	7/07/10	

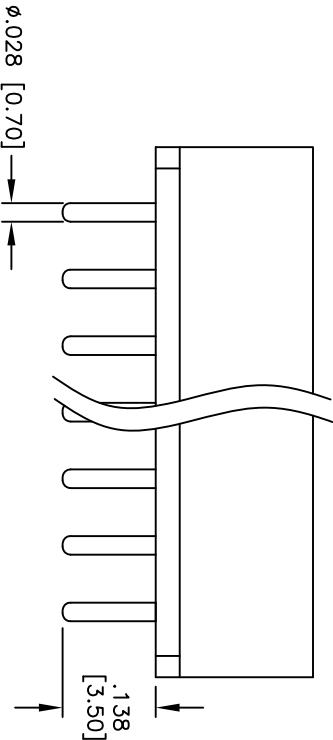

Recommended PCB Layout

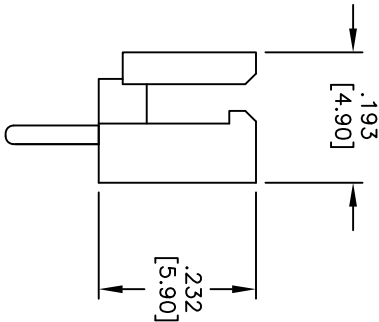

Positions: 02 thru 12
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]

SPECIFICATIONS:

Material:
Insulator: Nylon66, rated UL 94V-2
Insulator color: Beige
Contacts: Brass
Plating:
Tin over copper underplate overall.
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.098 [2.50] PITCH WAFER, STRAIGHT PCB

LOW PROFILE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		Holes	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	DR	1/10/09	
CHECKED			
APPROVED			
SIZE		PART NO.	REV.
X		25SH-E-XX-TS	A
REF: S00015T		SCALE: NTS	SHEET 1 OF 1