4 TERMINAL LOW DROP VOLTAGE REGULATOR

The KIA78MR×× Series are Low Drop Voltage Regulator suitable for various electronic equipments. It provides constant voltage power source with TO-220 4 terminal lead full molded PKG.
The Regulator has multi function such as over current protection, overheat protection and ON/OFF control.

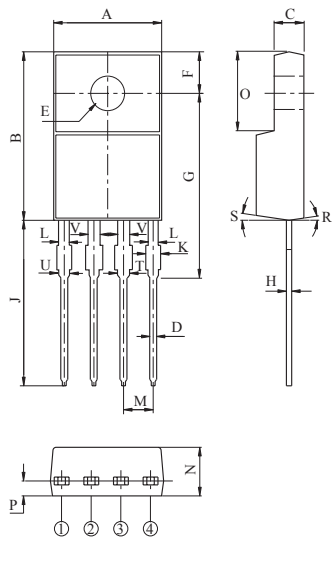

DIM	MILLIMETERS
A	10.00±0.20
B	15.00±0.20
C	2.70±0.20
D	0.60±0.10
E	Φ3.20±0.20
F	3.50±0.10
G	15.70±0.20
H	0.40±0.10
J	14.3+0.2/-0.1
K	1.45±0.10
L	1.00±0.10
M	2.54
N	4.50±0.20
O	7.5± 0.1
P	1.50±0.10
R	5°
S	8°
T	1.30±0.1
U	3-1.00±0.1
V	1.30±0.1

TO-220IS-4

FEATURES

- 0.5A Output Low Drop Voltage Regulator.
- Built in ON/OFF Control Terminal.
- Built in Over Current Protection, Over Heat Protection Function.

LINE UP

ITEM	OUTPUT VOLTAGE (Typ.)	UNIT
* KIA78MR05PI	5	V
* KIA78MR06PI	6	
* KIA78MR08PI	8	
* KIA78MR09PI	9	
* KIA78MR10PI	10	
* KIA78MR12PI	12	
* KIA78MR15PI	15	

Note) * : Under development

MAXIMUM RATINGS (Ta=25℃)

CHARACTERISTIC	SYMBOL	RATING	UNIT	Remark
Input Voltage	V_{IN}	35	V	-
ON/OFF Control Voltage	V_C	35	V	-
Output Current	I_O	0.5	A	-
Power Dissipation 1	P_{d1}	1.5	W	No heatsink
Power Dissipation 2	P_{d2}	15	W	with heatsink
Junction Temperature	T_j	125	℃	-
Operating Temperature	T_{opr}	-20～80	℃	-
Storage Temperature	T_{stg}	-30～125	℃	-
Soldering Temperature (10sec)	T_{sol}	260	℃	-

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, I_O=0.25A, Ta=25℃, Note1.)

CHARACTERISTIC		SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	KIA78MR05	V_O	-	4.88	5.0	5.12	V
	KIA78MR06		-	5.85	6.0	6.15	
	KIA78MR08		-	7.80	8.0	8.2	
	KIA78MR09		-	8.78	9.0	9.22	
	KIA78MR10		-	9.75	10.0	10.25	
	KIA78MR12		-	11.70	12.0	12.30	
	KIA78MR15		-	14.70	15.0	15.30	
Load Regulation		Reg Load	I_O=5mA ~ 0.5A	-	0.1	2.0	%
Line Regulation		Reg Line	(Note2)	-	0.5	2.5	%
Ripple Rejection		R · R	-	55	65	-	dB
Drop Out Voltage		V_D	I_O=0.5A, (Note3)	-	-	0.5	V
Output ON state for control Voltage		$V_{C(ON)}$	-	2.0	-	-	V
Output ON state for control Current		$I_{C(ON)}$	V_C=2.7V	-	-	20	μA
Output OFF state for control Voltage		$V_{C(OFF)}$	-	-	-	0.8	V
Output OFF state for control Current		$I_{C(OFF)}$	V_C=0.4V	-	-	-0.4	mA
Quiescent Current		I_Q	I_O=0	-	-	10	mA

Note1) V_{IN} of KIA78MR05=7V
" KIA78MR06=8V
" KIA78MR08=10V
" KIA78MR09=15V
" KIA78MR10=16V
" KIA78MR12=18V
" KIA78MR15=21V

Note2) V_{IN} of KIA78MR05=6 ~ 12V
" KIA78MR06=7 ~ 15V
" KIA78MR08=9 ~ 25V
" KIA78MR09=10 ~ 25V
" KIA78MR10=11 ~ 26V
" KIA78MR12=13 ~ 29V
" KIA78MR15=16 ~ 32V

Note3) At V_{IN}=0.95V_O

BLOCK DIAGRAM

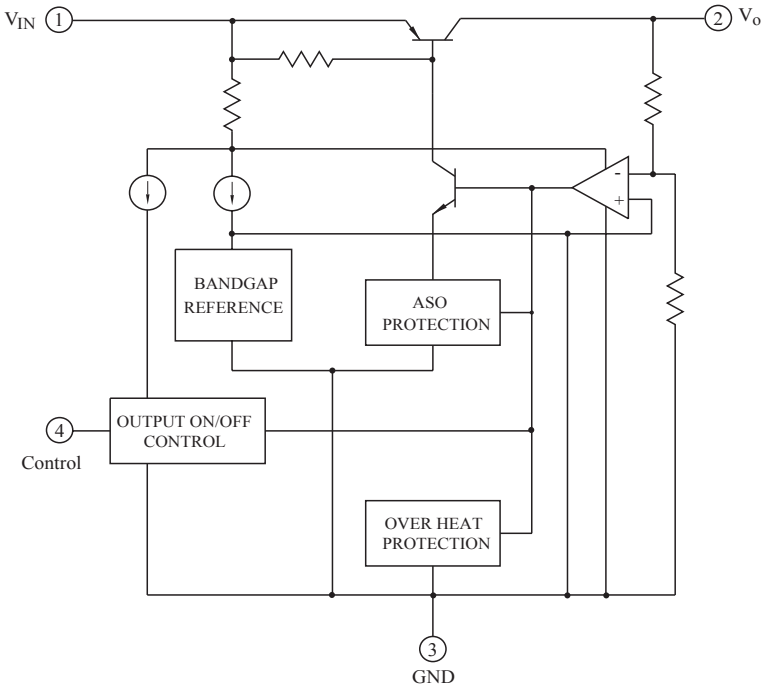

Fig. 1 Standard Test Circuit

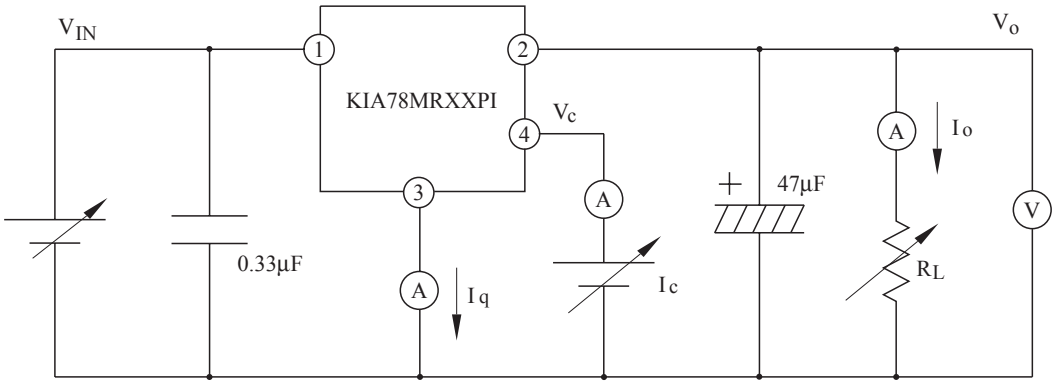

Fig. 1-2 Ripple Rejection Test Circuit

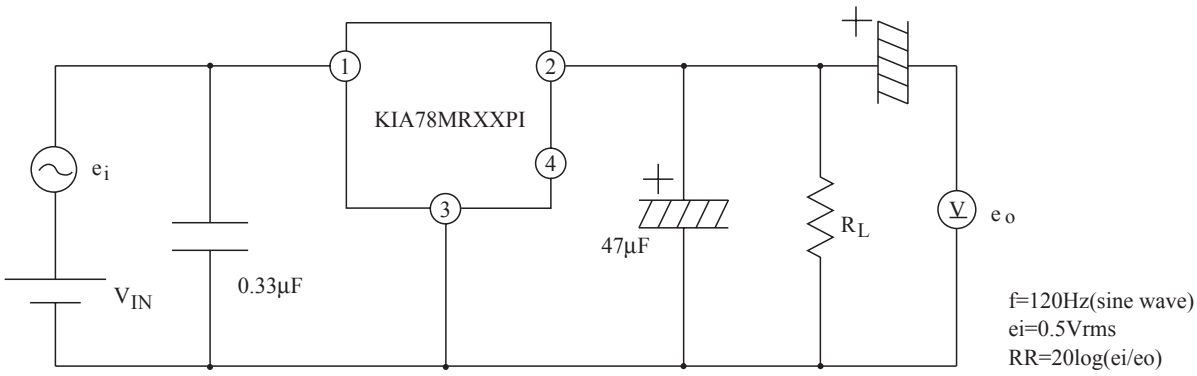

Fig. 2 Application Circuit for Standard

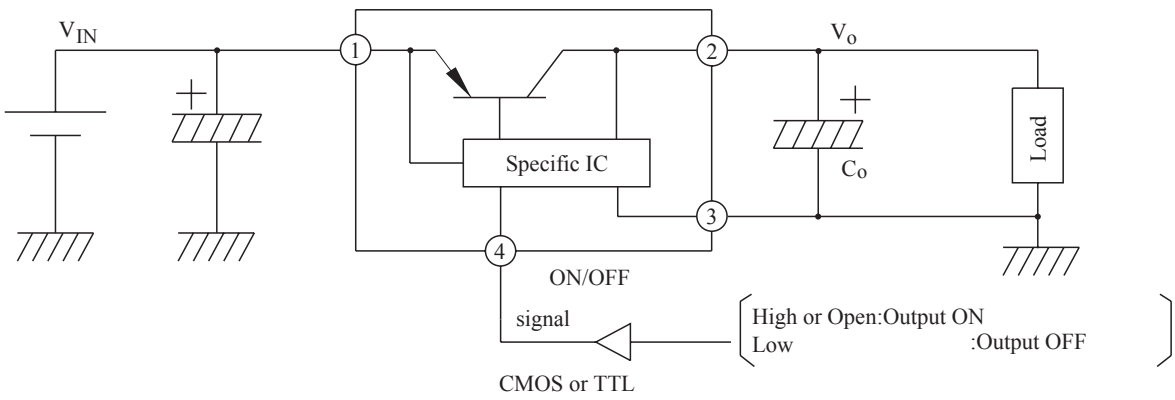

Fig.3 Ta - P_D

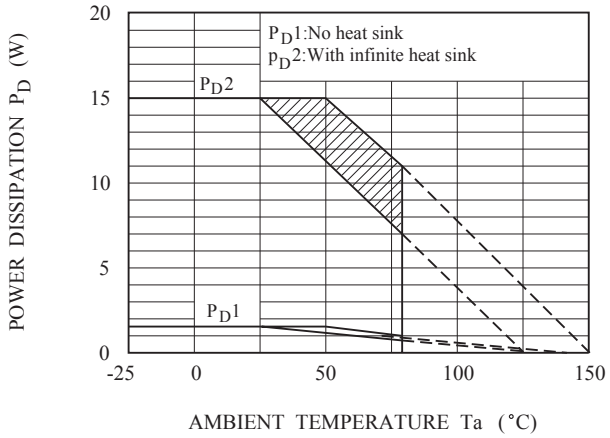

Note) Oblique line portion : Overheat protection may operate in this area.

Fig.4 I_O - V_O

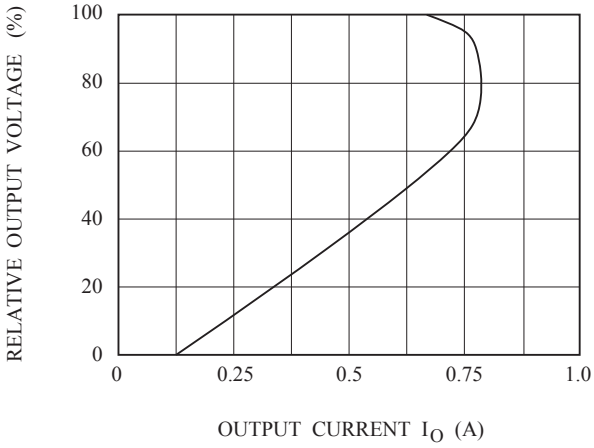

Fig.5-1 T_j - ΔV_o (KIA78MR05)

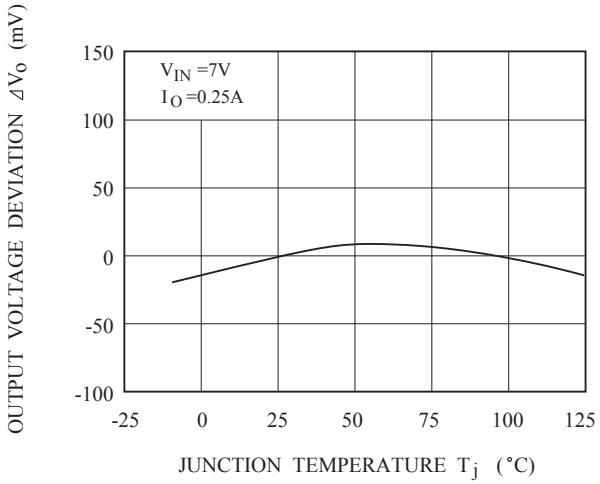

Fig.5-2 T_j - ΔV_o (KIA78MR06)

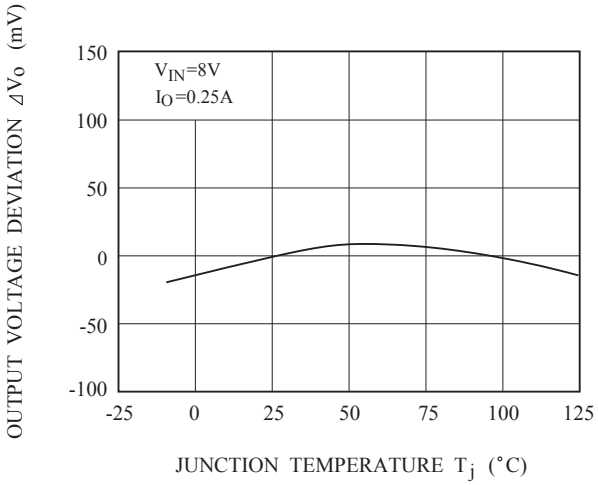

Fig.5-3 T_j - ΔV_o (KIA78MR08)

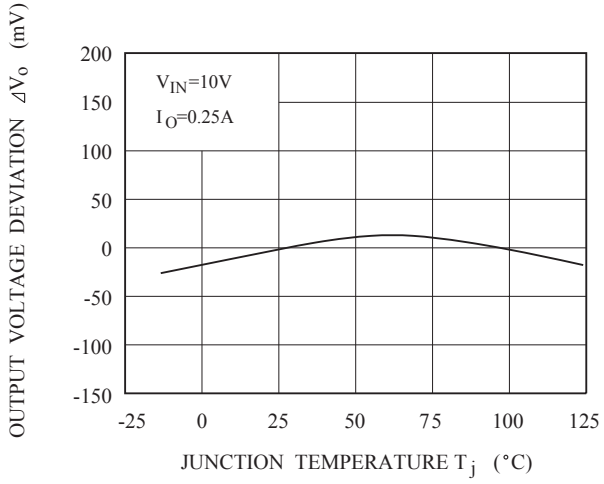

Fig.5-4 T_j - ΔV_o (KIA78MR09)

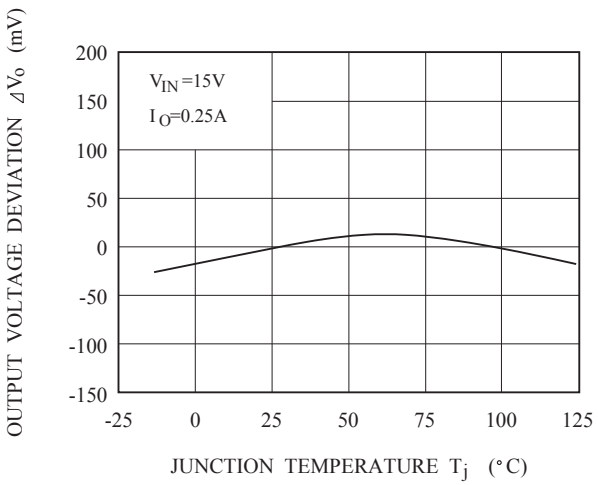

Fig.5-5 T_j - ΔV_o (KIA78MR10)

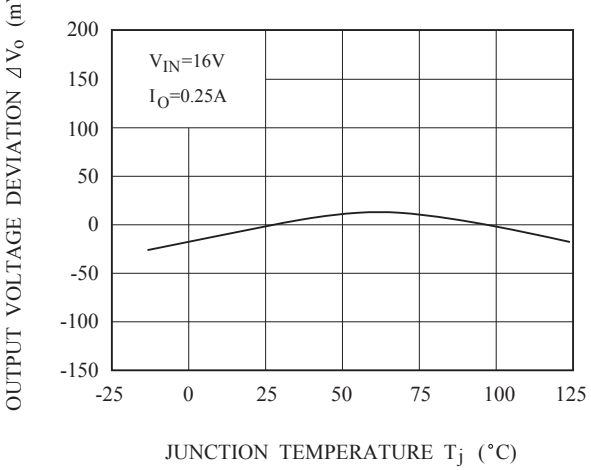

Fig.5-6 T_j - ΔV_o (KIA78MR12)

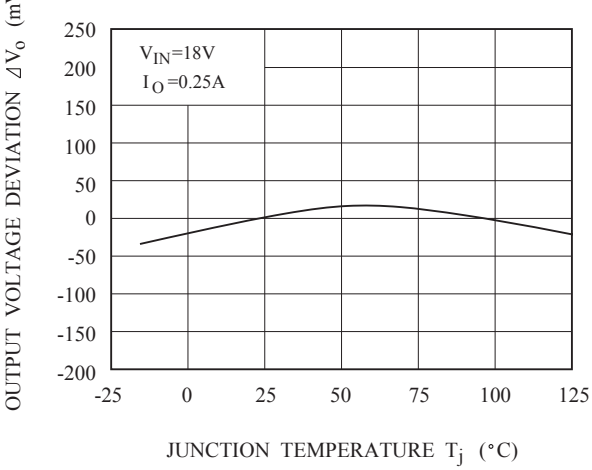

Fig.5-7 T_j - ΔV_o (KIA78MR15)

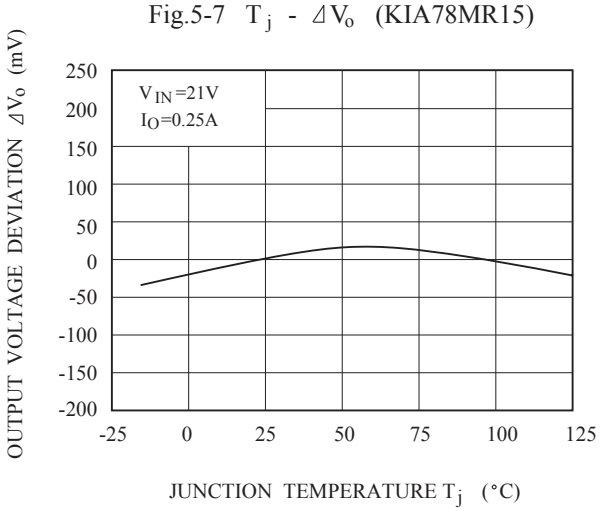

Fig.6-1 V_{IN} - V_o (KIA78MR05)

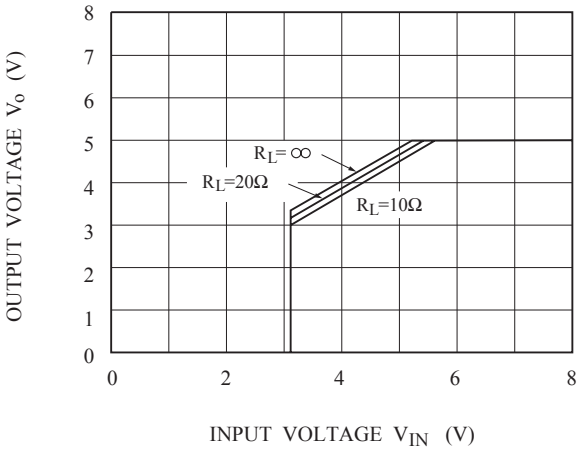

Fig.6-2 V_{IN} - V_o (KIA78MR06)

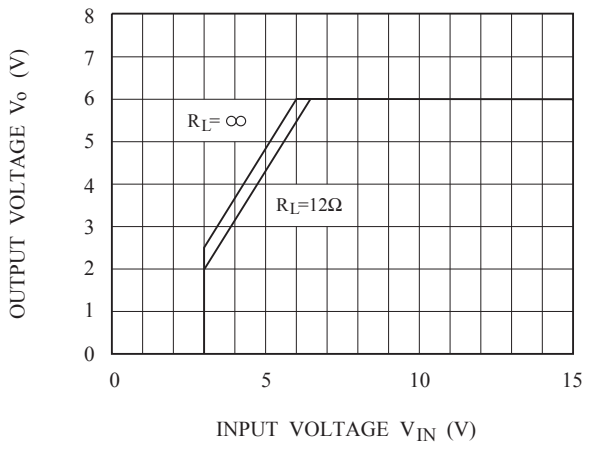

Fig.6-3 V_{IN} - V_o (KIA78MR08)

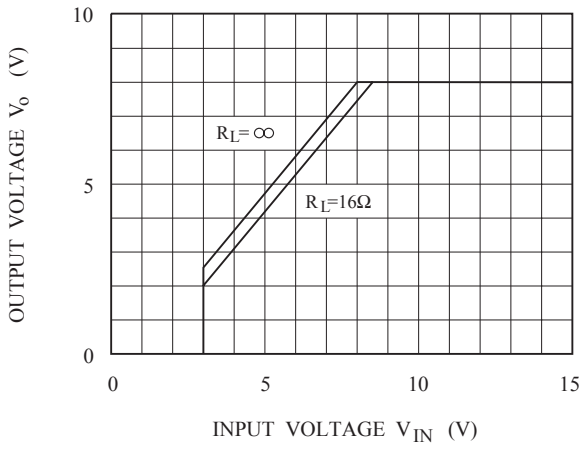

Fig.6-4 V_{IN} - V_o (KIA78MR09)

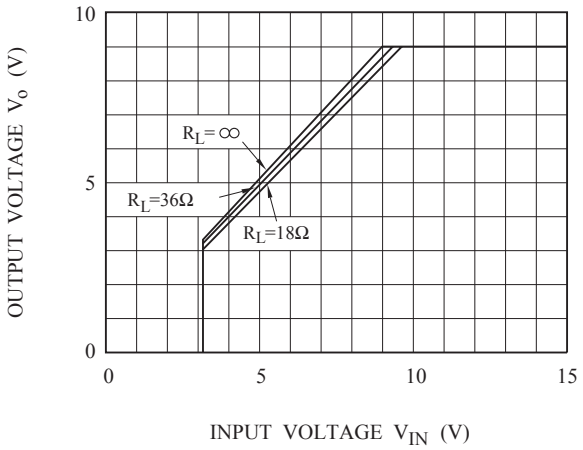

Fig.6-5 V_{IN} - V_o (KIA78MR10)

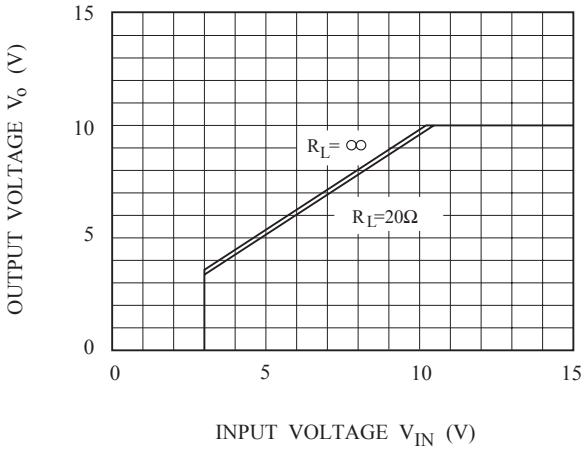

Fig.6-6 V_{IN} - V_O (KIA78MR12)

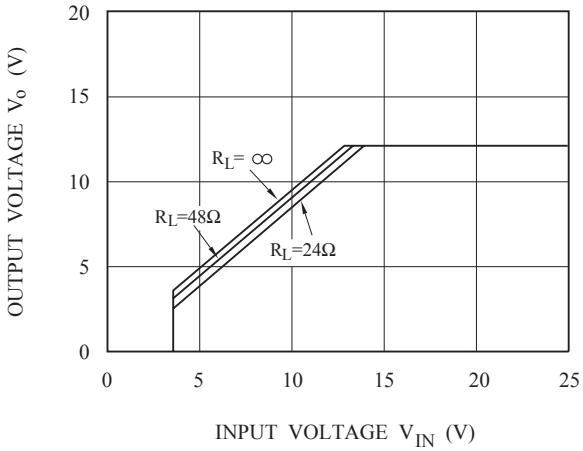

Fig.6-7 V_{IN} - V_O (KIA78MR15)

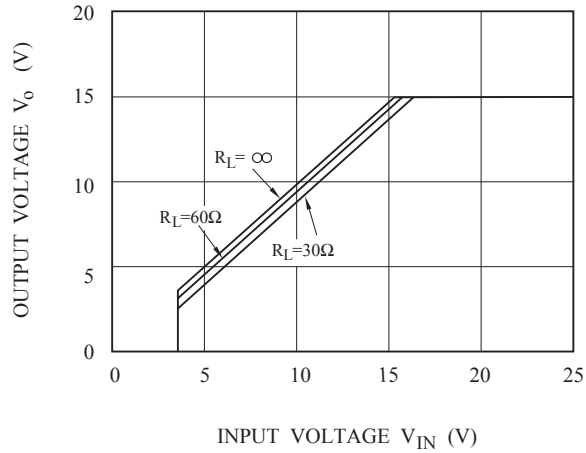

Fig.7-1 V_{IN} - I_{BIAS} (KIA78MR05)

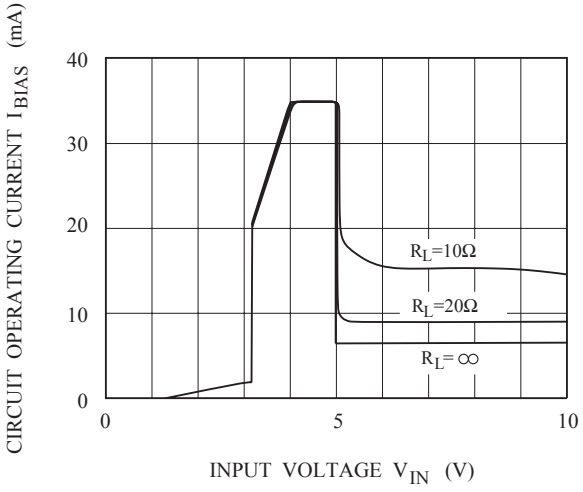

Fig.7-2 V_{IN} - I_{BIAS} (KIA78MR06)

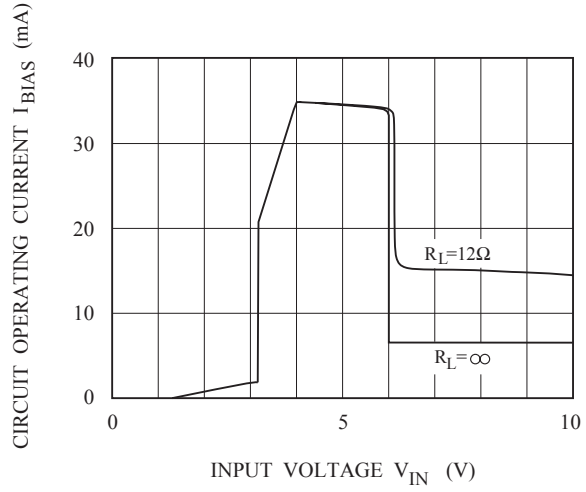

Fig.7-3 V_{IN} - I_{BIAS} (KIA78MR08)

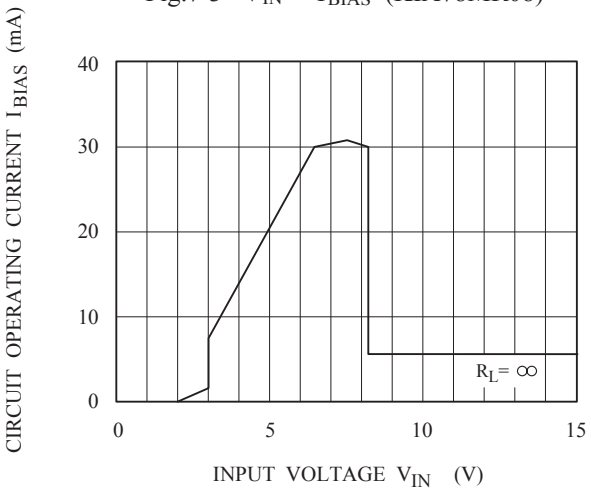

Fig.7-4 V_{IN} - I_{BIAS} (KIA78MR09)

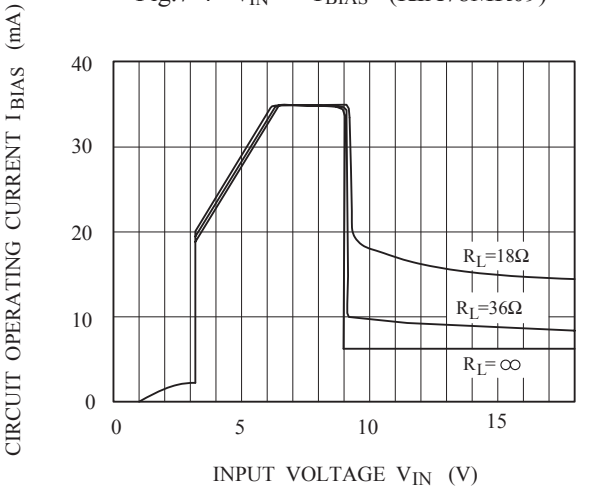

Fig.7-5 V_{IN} - I_{BIAS} (KIA78MR10)

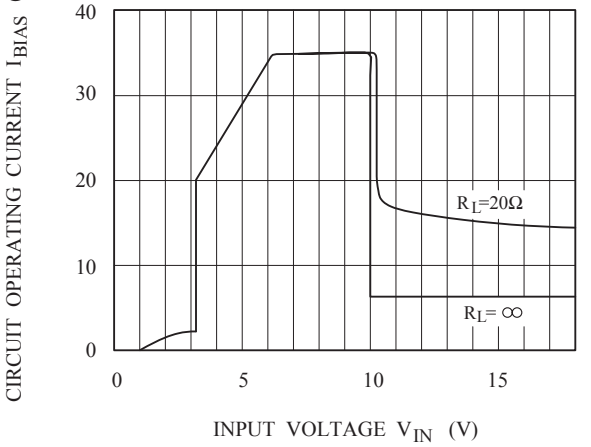

Fig.7-6 V_{IN} - I_{BIAS} (KIA78MR12)

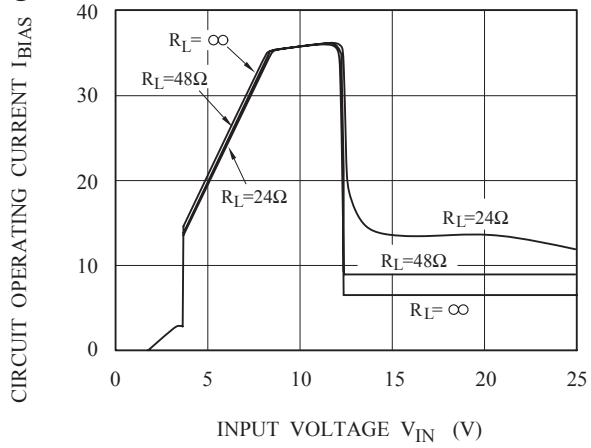

Fig.7-7 V_{IN} - I_{BIAS} (KIA78MR15)

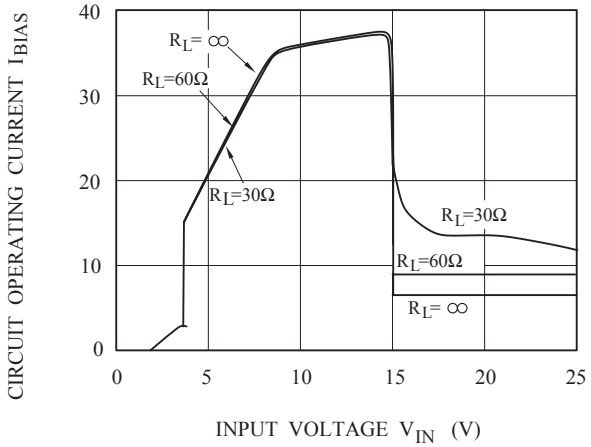

Fig.8 T_j - V_D

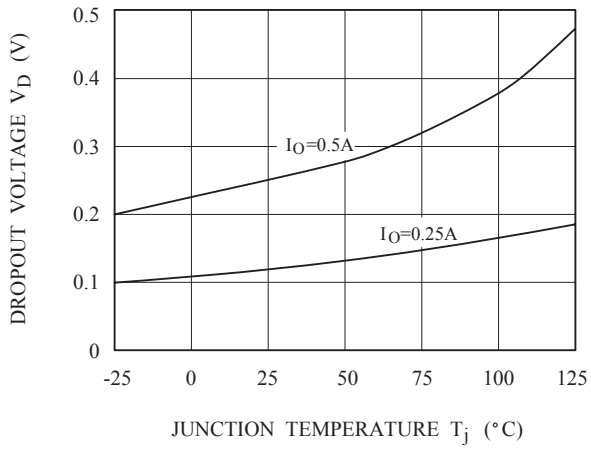

Fig.9 T_j - I_Q

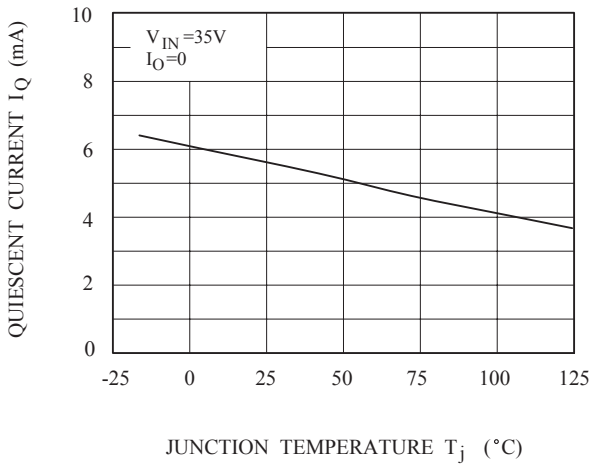

Fig.10-1 f - RR

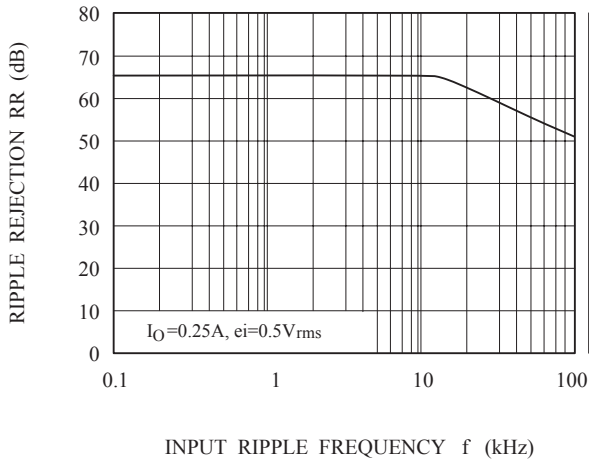

Fig.10-2 I_O - RR

