Heyco® Double D Hole Plugs

For Mounting Holes with Flats

Multiple Locking Steps for Panel Thickness up to .125″ (3,2 mm)




PANEL DIMENSIONS C Mounting Hole Dia. in.	mm.	D To Prevent Rotation in.	mm.	PART NO. Black	White	DESCRIPTION	PART DIMENSIONS A Head Diameter in.	mm.	B Overall Height in.	mm.
.375	9,5	.345	8,8	**2617**	**2618**	DP 375*	.468	11,9	.406	10,3
.437	11,1	.390	9,9	**2488**	**2489**	DD 437-390	.531	13,5		
.500	12,7	.445	11,3	**2491**	**2492**	DD 500-445	.554	14,7		
.562	14,3	.530	13,5	**2494**	**2495**	DD 562-530	.656	16,7		
.625	15,9	.550	14,0	**2497**	**2498**	DD 625-550	.728	18,5		
.750	19,1	.625	15,9	**2503**	**2504**	DD 750-625	.921	23,4		
.875	22,2	.770	19,5	**2509**	**2510**	DD 875-770	1.016	25,8	.453	11,5
				2511	–	DD 875-770-9**	.938	23,8		
1.109	28,2	1.000	25,4	**2717**	**2718**	DD 1109-1000	1.218	30,9		
2.000	50,8	1.875	47,6	**2959**	**2963**	DD 2000-1875	2.170	55,1	.478	12,1

Standard colors black and white. Consult Heyco for other colors.

*On installation, DP 375 Locking Fingers must be aligned with Mounting Hole Flats.

**Smaller than standard Head Diameter, for clearance situations.

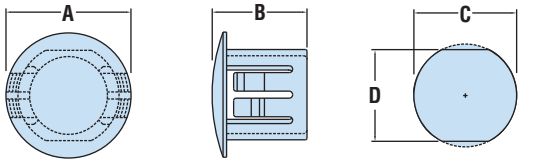

DD Series

MOUNTING HOLE


- **Close unwanted Strain Relief mounting holes** or other double faced or Double D holes punched or molded with two opposing flats.
- Convex, matte finish head tapers to a thin edge.
- Quick and easy installation.
- Lock firmly in panels up to .125″ (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062″ (1,6 mm). Thickness may vary.

Heyco® Rectangular Blanking Plugs




	PANEL DIMENSIONS Maximum Thickness in.	mm.	Mounting Hole C Length in.	mm.	D Width in.	mm.	PART NO. Black	DESCRIPTION	PART DIMENSIONS A Head Dimensions in.	mm.	B Overall Height in.	mm.
	.04	1,0	.27	6,9	.29	7,4	**2512**	RP 69-74*	.37 x .37	9,4 x 9,4	.330	8,4
NEW!	.14	3,5	.37	9,5	.51	13,0	**3388**	RP 95-130	.46 x .87	11,8 x 22	.41	10,5
					1.02	26,0	**3389**	RP 95-260	.46 x 1.38	11,8 x 35		
	.10	2,5	.45	11,5	.51	13,9	**1890**	RP 115-139	.58 x .58	14,7 x 14,7	.40	10,2
	.16	4,0	.69	17,5	.69	17,5	**1892**	RP 175-175	.83 x .83	21,1 x 21,1	.47	11,9

Standard color black. Consult Heyco for other colors. *Single locking step for Panel Thickness up to .04″ (1,0 mm).



RP Series

MOUNTING HOLE

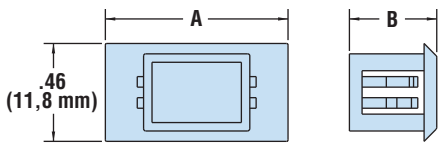

3388, 3389

- **Fill uniquely sized panel holes**.
- Blank unused rectangular panel holes.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Consult Heyco for other sizes. Our Axcell Rapid Response team is ready to meet your design requirements.
- **PN 1890** - UR Recognized under the Component Program of Underwriters' Laboratories File E15331.
- **PN 1892** - UR Recognized under the Component Program of Underwriters' Laboratories File E51579 and CSA Certified by the Canadian Standards Association File 8919.

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriter Laboratories File E51579 (DD only)
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs