

"Stikon™" thermocouples 26700 series

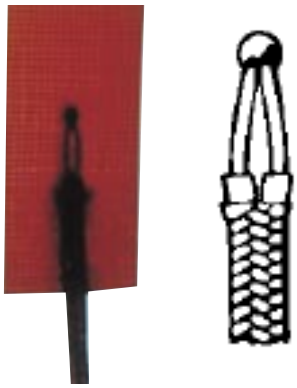

Easily mounted on most surfaces, the 'Stikon™' thermocouple is constructed using 0.25mm diameter wire which is bead welded and embedded in a paper thin laminate intended for surface application by adhesive bonding. These versatile, low cost thermocouples can be used for a wide variety of surface temperature measurements including environmental testing, temperature surveys of electrical components, oven wall temperature, etc. They are designed for use with standard readout instruments.

- **Completely insulated**
- **Rugged construction**
- **Flexible**
- **Low mass**
- **Response time: 25 mseconds**
- **Thickness 0.4mm**

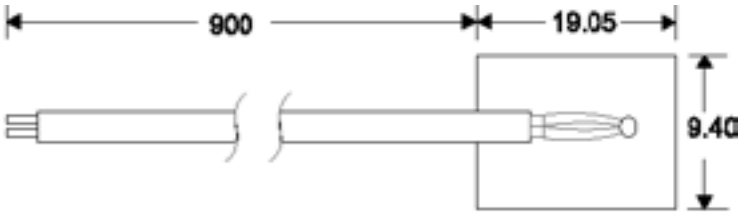

Dimensions in mm

Thermocouple type	Positive lead	Negative lead	Temperature range °C
26721	Chromel (purple)	Constantan (red)	-160 to +370
26722	Copper (blue)	Constantan (red)	600 hours
26723	Chromel (yellow)	Alumel (red)	-160 to +260
26724	Iron (white)	Constantan (red)	Continuous