

HIGH FREQUENCY MAGNETICS

T1/E1 Surface Mount Transformers

TM00133



- Operate at the T1 rate of 1.544 Mb/s and the E1 rate of 2.048 Mb/s
- Split windings provide maximum application flexibility
- Minimum interwinding breakdown voltage of 1500 Vrms
- Operating temperature range: -40° C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: Shock, vibration, temperature cycling, temperature - humidity - bias

ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Turns Ratio ± 2%	Primary Inductance ¹ mH min	Leakage Inductance ² µH max	DCR Ω max		Interwinding Capacitance pF max
	Pri : Sec ³			Pri	Sec ³	
2771B	1 : 1.14 CT	1.75	2	0.8	0.8	80
2771C	1 CT : 2 CT ⁴	3.15 ⁴	3	1.10 ⁴	2.25	30

1. measured at 10 kHz, 0.1 Vac
2. measured at 100 kHz, 0.1 Vac
3. connect 6 to 7
4. connect 2 to 3

SCHEMATICS

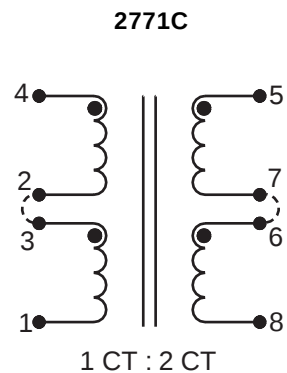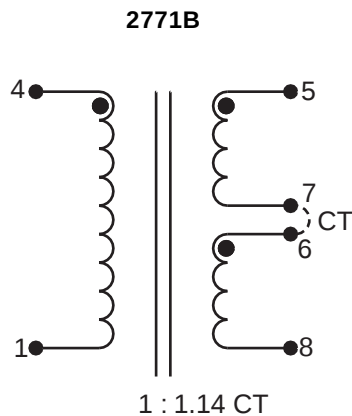


HIGH FREQUENCY MAGNETICS


T1/E1 Surface Mount Transformers

MECHANICAL

2771B
2771C

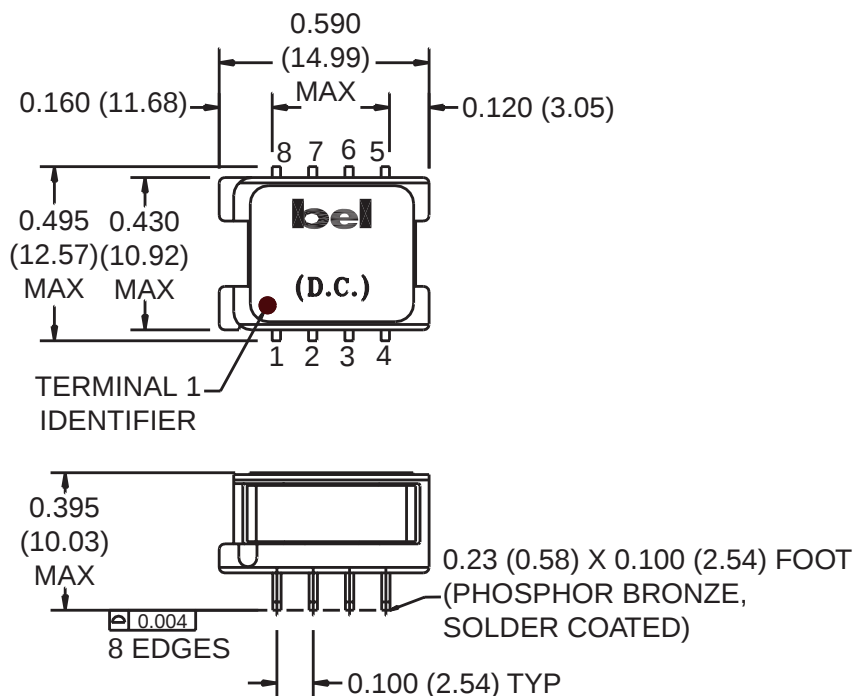

RECOMMENDED PCB PATTERN

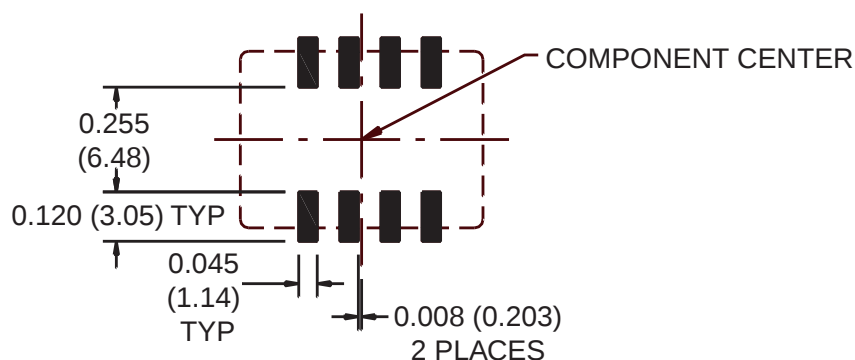

Unless otherwise specified, dimensions are nominal and in inches (millimeters).

©2000 Bel Fuse Inc. Specifications subject to change without notice. 09.00

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com