

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
GP	00


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	U	REDRAWN PER ECO-12-007497	30MAY2012	CJV	SLB

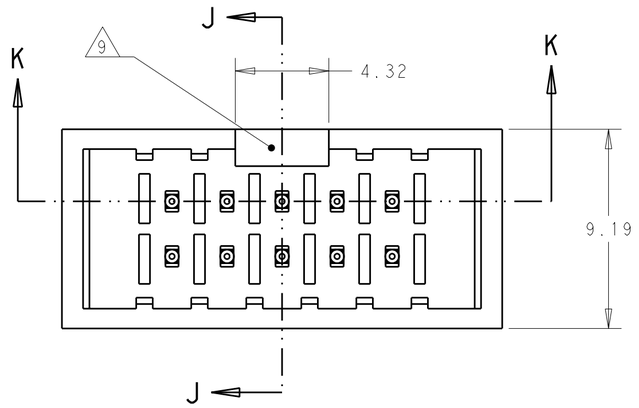

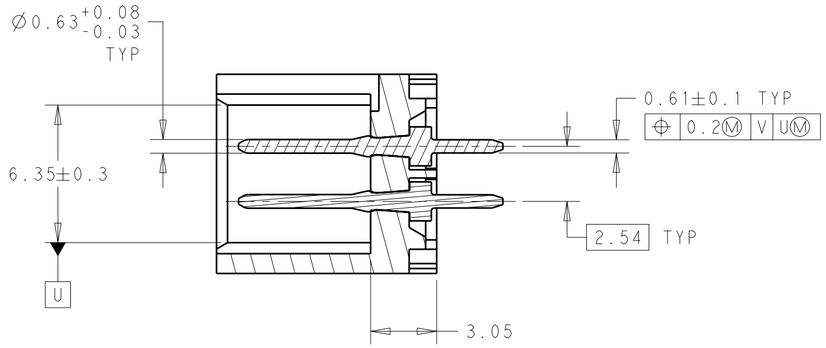

SECTION J-J

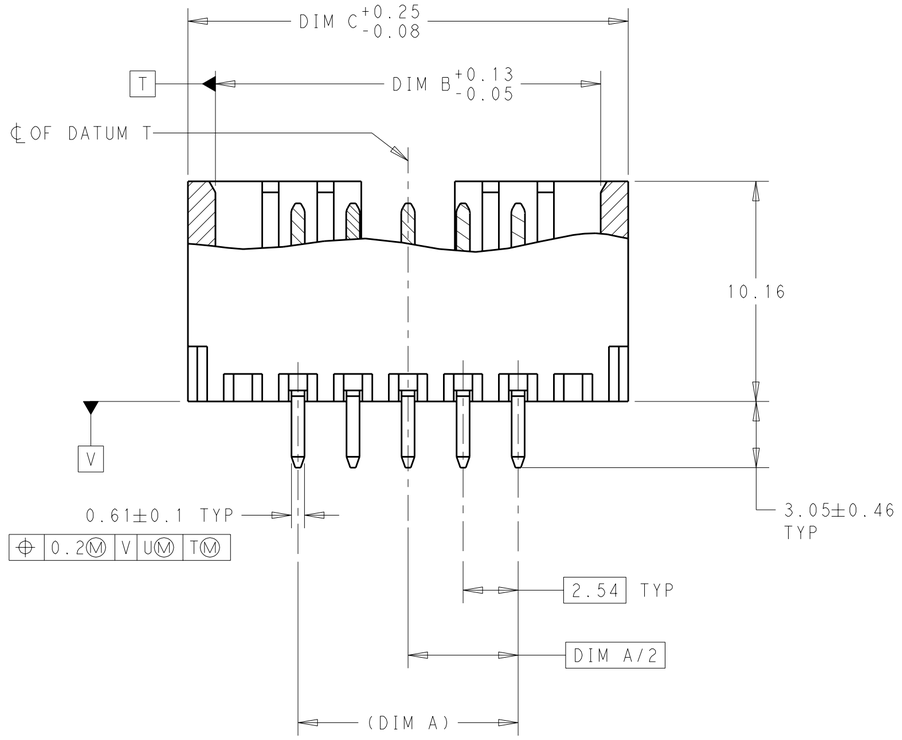

SECTION K-K

1. HOUSING MATERIAL: PBT, GLASS FILLED, UL94V-O RATED, BLACK.
2. HOUSING MATERIAL: PBT, GLASS FILLED, UL94V-O RATED, GRAY.
3. HOUSING MATERIAL: PPS, GLASS FILLED, UL94V-O RATED, BROWN.
4. CONTACT MATERIAL: BRASS.
5. CONTACT FINISH: 0.76µm MIN GOLD OVER 1.27µm MIN NICKEL ON MATING SURFACES, 3µm MIN BRIGHT TIN OVER 1.27µm MIN NICKEL ON SOLDER TAIL.
6. CONTACT FINISH: 0.38µm MIN GOLD OVER 1.27µm MIN NICKEL ON MATING SURFACES, 3µm MIN BRIGHT TIN OVER 1.27µm MIN NICKEL ON SOLDER TAIL.
7. CONTACT FINISH: 0.2µm MIN GOLD OVER 1.27µm MIN NICKEL ON MATING SURFACES, 3µm MIN BRIGHT TIN OVER 1.27µm MIN NICKEL ON SOLDER TAIL.
8. OBSOLETE.
9. COMPANY LOGO APPROXIMATELY WHERE SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.2
2 PLC ±0.13
3 PLC ±0.005
4 PLC ±0.0005
ANGLES ±-

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN C. VALENTINE 30MAY2012
CHK S. BOLASH 30MAY2012
APVD S. BOLASH 30MAY2012
PRODUCT SPEC 108-20038
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME HEADER ASSEMBLY, VERTICAL, LOW PROFILE, AMP-LATCH
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-281271	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 2 | REV U

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NO POS	PART NUMBER	A	B	C	NOTES
10	281271-3	10.16	17.78	20.32	
14	281272-3	15.24	22.86	25.40	
16	281273-3	17.78	25.40	27.94	
20	281274-3	22.86	30.48	33.02	
26	281275-3	30.48	38.10	40.64	
34	281276-3	40.64	48.26	50.80	
40	281277-3	48.26	55.88	58.42	
50	281278-3	60.96	68.58	71.12	
60	281836-3	73.66	81.28	83.82	

△1 △7 △8

NO POS	PART NUMBER	A	B	C	NOTES
10	281271-2	10.16	17.78	20.32	
14	281272-2	15.24	22.86	25.40	
16	281273-2	17.78	25.40	27.94	
20	281274-2	22.86	30.48	33.02	
26	281275-2	30.48	38.10	40.64	
34	281276-2	40.64	48.26	50.80	
40	281277-2	48.26	55.88	58.42	
50	281278-2	60.96	68.58	71.12	
△8 60	281836-2	73.66	81.28	83.82	

△1 △6

NO POS	PART NUMBER	A	B	C	NOTES
10	1-281271-1	10.16	17.78	20.32	
14	1-281272-1	15.24	22.86	25.40	
16	1-281273-1	17.78	25.40	27.94	
20	1-281274-1	22.86	30.48	33.02	
26	1-281275-1	30.48	38.10	40.64	
34	1-281276-1	40.64	48.26	50.80	
40	1-281277-1	48.26	55.88	58.42	
50	1-281278-1	60.96	68.58	71.12	
60	1-281836-1	73.66	81.28	83.82	

△3 △5 △8

NO POS	PART NUMBER	A	B	C	NOTES
10	281271-1	10.16	17.78	20.32	
14	281272-1	15.24	22.86	25.40	
16	281273-1	17.78	25.40	27.94	
20	281274-1	22.86	30.48	33.02	
26	281275-1	30.48	38.10	40.64	
34	281276-1	40.64	48.26	50.80	
40	281277-1	48.26	55.88	58.42	
50	281278-1	60.96	68.58	71.12	
△8 60	281836-1	73.66	81.28	83.82	

△1 △5

NO POS	PART NUMBER	A	B	C	NOTES
10	281271-5	10.16	17.78	20.32	
14	281272-5	15.24	22.86	25.40	
16	281273-5	17.78	25.40	27.94	
20	281274-5	22.86	30.48	33.02	
26	281275-5	30.48	38.10	40.64	
34	281276-5	40.64	48.26	50.80	
40	281277-5	48.26	55.88	58.42	
50	281278-5	60.96	68.58	71.12	
60	281836-5	73.66	81.28	83.82	

△2 △7 △8

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.2
2 PLC ±0.13
3 PLC ±0.005
4 PLC ±0.0005
ANGLES ±-

MATERIAL SEE TABLE
FINISH SEE TABLE

DWN C. VALENTINE 30MAY2012
CHK S. BOLASH 30MAY2012
APVD S. BOLASH 30MAY2012
PRODUCT SPEC 108-20038
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME HEADER ASSEMBLY, VERTICAL, LOW PROFILE, AMP-LATCH
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-281271	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 2 OF 2 | REV U