
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 19 BY - ALL RIGHTS RESERVED.

LOC	DIST
1	-


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	DRAFTING CORRECTION	04SEP2012	A.B.	M.G.
	D3	ADDED ALTERNATIVE SHAPE VERSION	20MAR2016	M.P.	M.G.


FORMA ALTERANTIVA (ALTERNATIVE SHAPE)

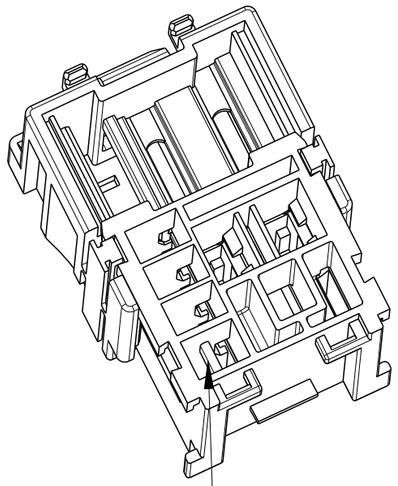



PARETE DIVISORIA RIBASSATA (SEPARATION WALL LOWERED)

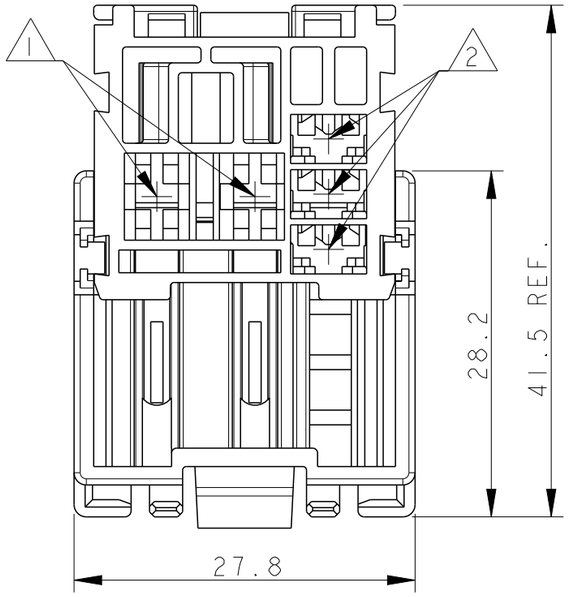

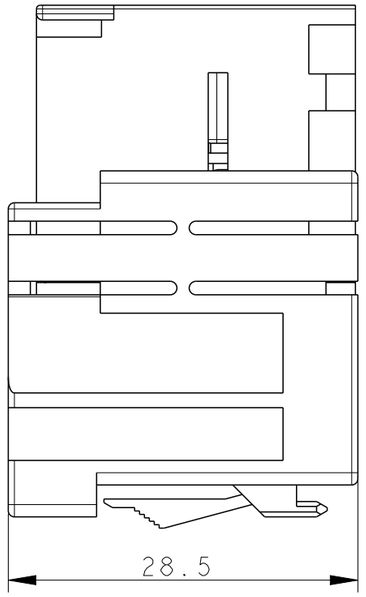

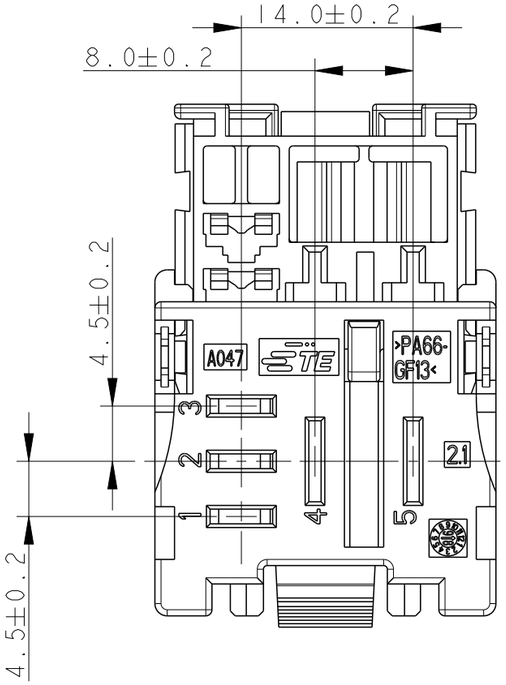

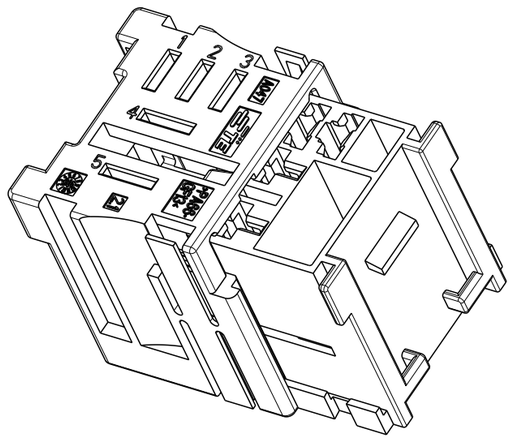

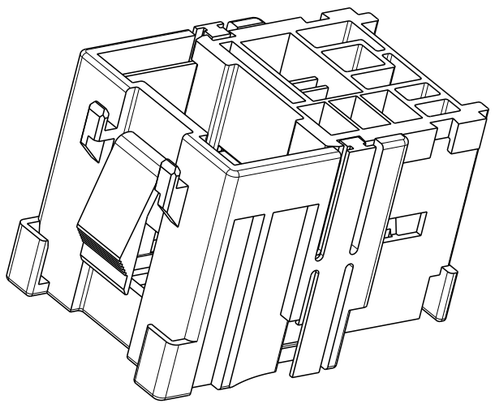

VERDE (GREEN)	PA 6.6 GF	D	284106-5
MARRONE (BROWN)		D	284106-4
ROSSO (RED)		D	284106-3
NERO (BLACK)		D	284106-2
NATURALE (NATURAL)		D	284106-1
COLORE (COLOUR)	MATERIALE (MATERIAL)	REV.	NUMERO (PART NUMBER)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.3
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±2

MATERIAL SEE TABLE

FINISH SEE TABLE

DWN	C.PIA	15JUN98
CHK	A.GENTA	15JUN98
APVD	A.BRUNI	15JUN98
PRODUCT SPEC	108-	
APPLICATION SPEC	114-	
WEIGHT	-	

TE Connectivity

NAME 5 POS. MODULAR CONN FOR MICRO-RELAY WITH SECONDARY LOCK
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-284106	-


CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 2 | REV D3


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 19 BY - ALL RIGHTS RESERVED.


LOC	DIST
1	-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

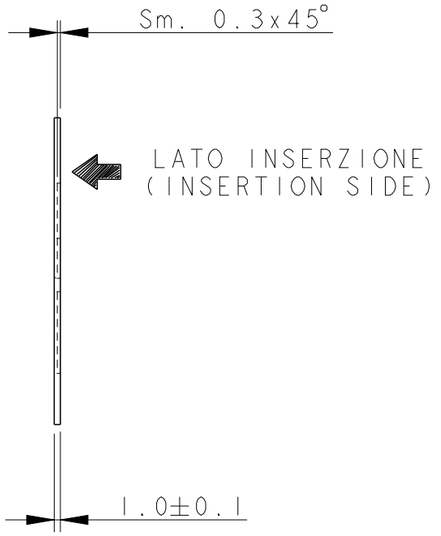


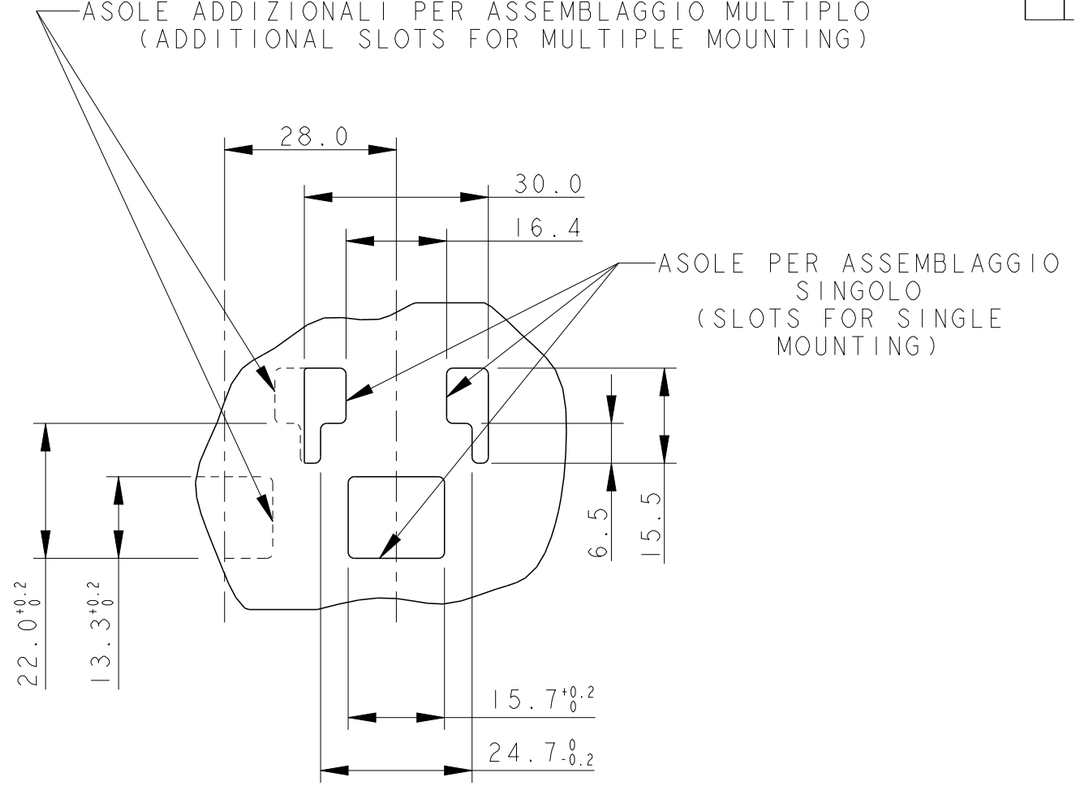

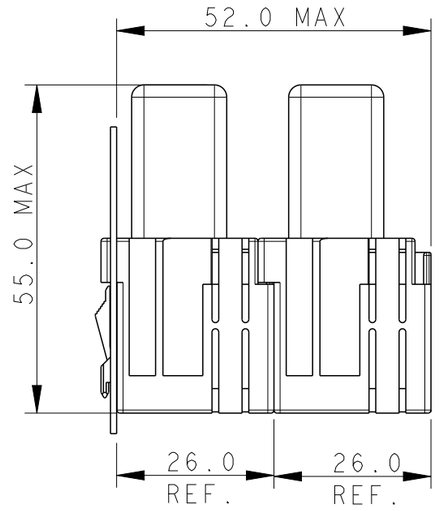

RAPPRESENTAZIONE MODULARITA'
SCALA 1:1
NON ASSEMBLARE PIU' DI
2 CONNETTORI INSIEME
(SKETCH SHOWING CONNECTORS MODULARITY
SCALE 1:1
DO NOT ASSEMBLE MORE THAN
2 CONNECTORS TOGETHER)

DIMENSIONI RELAY
(RELAY DIMENSIONS)

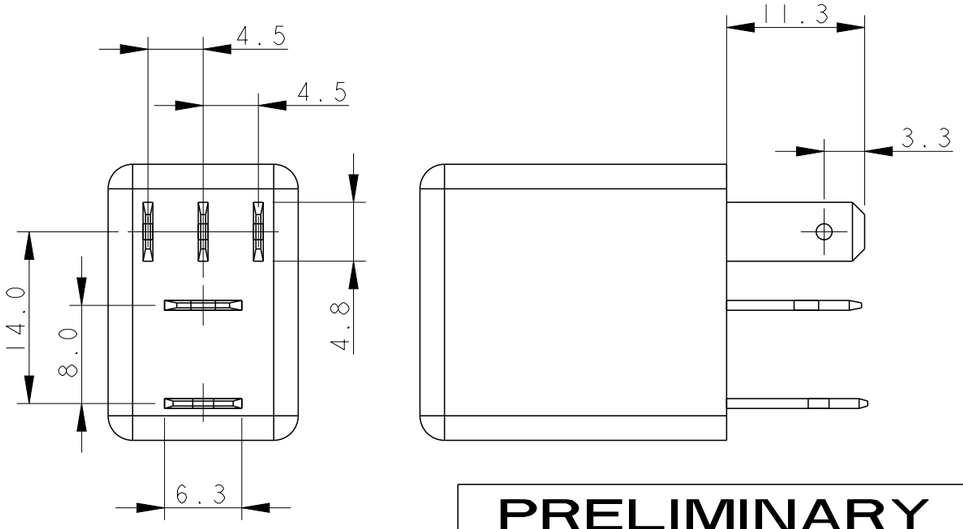

PRELIMINARY

1 N°2 CAVITA' ADATTE PER TERMINALI STANDARD POWER TIMER P/N:
(N°2 CAVITIES SUITABLE FOR STANDARD POWER TIMER CONTACTS P/N:)
927829-5 FINISH: SILVERED , WIRE RANGE: 2.5-4.0 sqmm
(FINITURA: AGENTATO, RANGO FILO: 2.5-4.0 sqmm)
1241818-5 FINISH : SILVERED , WIRE RANGE: 6.0 sqmm
(FINITURA: ARGENTATO, RANGO FILO: 6.0 sqmm)

2 N°3 CAVITA' ADATTE PER TERMINALI POSITIVE LOCK MARK II, .187 SERIES P/N:
(N°3 CAVITIES SUITABLE FOR POSITIVE LOCK MARK II, .187 SERIES CONTACTS P/N:)
173690-1 FINISH: PRE-TIN, WIRE RANGE: 0.35-0.5 sqmm
(FINITURA: PRE-STAGNATO, RANGO FILO: 0.35-0.5 sqmm)
173691-1 FINISH: PRE-TIN, WIRE RANGE: >0.5-1.0 sqmm
(FINITURA: PRE-STAGNATO, RANGO FILO: >0.50-1.0 sqmm)
1318306-1 FINISH: PRE-TIN, WIRE RANGE: >1.0-2.5 sqmm
(FINITURA: PRE-STAGNATO, RANGO FILO: >1.0-2.5 sqmm)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±0.3
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±2

MATERIAL SEE TABLE
FINISH SEE TABLE

DWN	C.PIA	15JUN98
CHK	A.GENTA	15JUN98
APVD	A.BRUNI	15JUN98
PRODUCT SPEC	108-	
APPLICATION SPEC	114-	
WEIGHT	-	

TE Connectivity

NAME 5 POS. MODULAR CONN FOR MICRO-RELAY WITH SECONDARY LOCK
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-284106	-

CUSTOMER DRAWING | SCALE 2:1 | SHEET 2 OF 2 | REV D3