MASW-008543

SPDT High Isolation Terminated Switch
0.01- 4.0 GHz

Rev. V3

Features

- Positive Voltage Control
- High Isolation:
  - 62 dB @ 1 GHz
  - 65 dB @ 2 GHz
- Low Insertion Loss:
  - 0.65 dB @ 1 GHz
  - 0.70 dB @ 2 GHz
- 50 Ω Internal Terminations
- Fast Settling for Low Gate Lag requirements
- Lead-Free MSOP-8-EP Package
- Halogen-Free "Green" Mold Compound
- RoHS* Compliant and 260°C Reflow Compatible

Description

The MASW-008543 GaAs monolithic switch provides high isolation in a lead-free, plastic surface mount package. This device is ideal for applications across a broad range of frequencies.


MACOM fabricates the MASW-008543 using a 0.5-micron gate length pHEMT process. The process features full chip passivation for performance and reliability.

Ordering Information[1,2]

Part Number	Package
MASW-008543-000000	Bulk Packaging
MASW-008543-TR3000	3000 piece reel
MASW-008543-001SMB	Sample Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

Functional Block Diagram

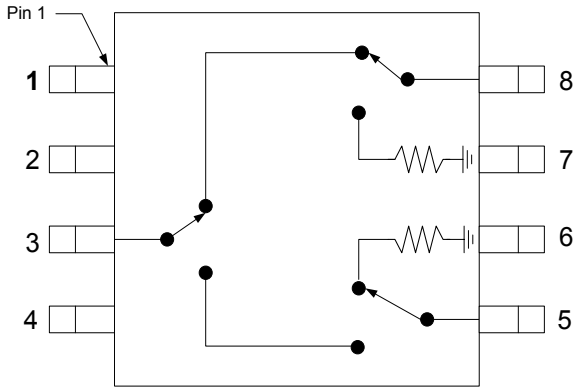

Pin Configuration[3]

Pin	Function	Pin	Function
1	V1	5	RF Port 2
2	V2	6	Ground
3	RF Common	7	Ground
4	Ground	8	RF Port 1

3. The exposed pad centered on the package bottom must be connected to RF and DC ground.

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macomtech.com for additional data sheets and product information.

For further information and support please visit:
https://www.macomtech.com/content/customersupport

Electrical Specifications[4]: T_A = 25°C, V_{HIGH} = 3 V, V_{LOW} = 0 V, Z_0 = 50 Ω

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	1.0 GHz 2.0 GHz 3.0 GHz 4.0 GHz	dB	—	0.65 0.70 0.85 1.10	— 0.95 — —
Isolation	1.0 GHz 2.0 GHz 3.0 GHz 4.0 GHz	dB	— 62 — —	62 65 50 45	—
Return Loss	0.5 - 4.0 GHz	dB	—	20	—
Input IP_3	2-Tone, 2.1 GHz, 10 MHz spacing	dBm	—	53	—
P1dB	2.1 GHz, V_{HIGH} = 3 V 2.1 GHz, V_{HIGH} = 5 V	dBm	—	25 30	—
P0.1dB	2.1 GHz, V_{HIGH} = 3 V 2.1 GHz, V_{HIGH} = 5 V	dBm	—	20 25	—
T_{RISE}, T_{FALL}	10% to 90% RF & 90% to 10% RF	ns	—	30	—
T_{ON}, T_{OFF}	50% of V_C to 10% / 90% RF	ns	—	52	—
Transients	In-band	mV	—	12	—
Control Current	-	µA	—	<1	5

4. External DC blocking capacitors are required on all RF ports (39 pF capacitors are recommended).

Absolute Maximum Ratings[5,6]

Parameter	Absolute Maximum
Input Power, V_{HIGH} = 3 V (0.5 - 3.0 GHz)	33 dBm
Operating Voltage	8 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. MACOM does not recommend sustained operation near these survivability limits.

Truth Table[7,8,9]

V1	V2	RFC-RF1	RFC-RF2
V_{HIGH}	V_{LOW}	On	Off
V_{LOW}	V_{HIGH}	Off	On


7. V_{LOW} = 0 V ± 0.2 V, V_{HIGH} = 1.8 V to +5 V, minimum V_{High} - V_{LOw} = 1.8 V, maximum V_{High} - V_{LOw} = 8.0 V.
8. For use at low voltage, MACOM recommends connecting a 20K pull up resistor on pin 3 to a voltage equal to the most positive control voltage.
9. Negative control voltage may be used. The V_{HIGH} in the table would be the most positive (0 V) and the V_{LOw} would be the most negative (-3 V for example).

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macomtech.com for additional data sheets and product information.


For further information and support please visit:
https://www.macomtech.com/content/customersupport

Typical Performance Curves


Insertion Loss

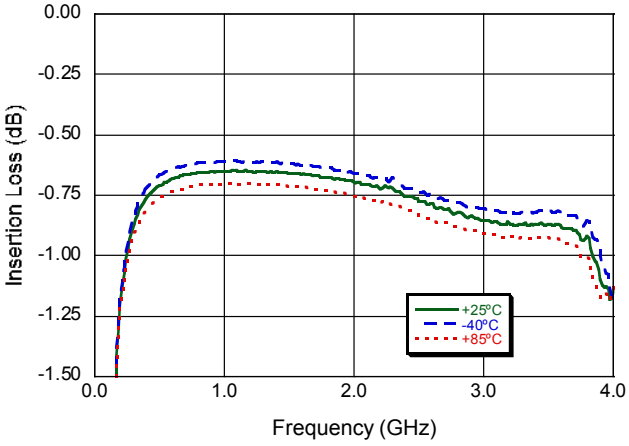


Isolation

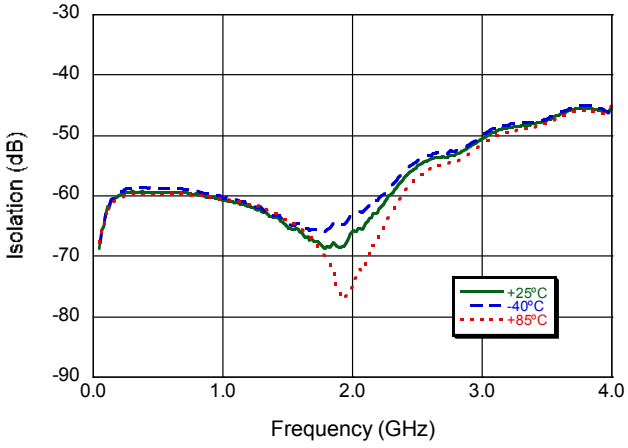


Output Return Loss (on state)

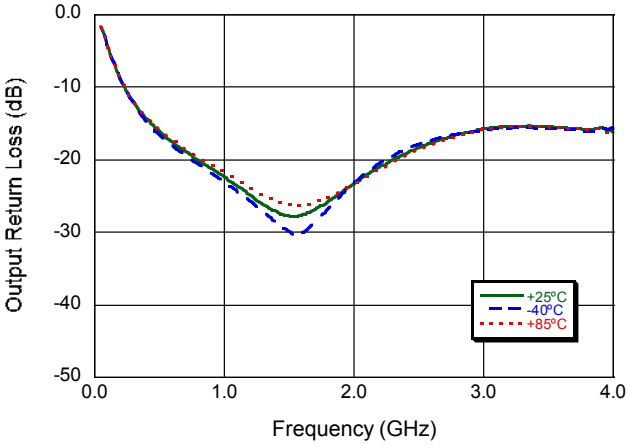

Output Return Loss (off state)

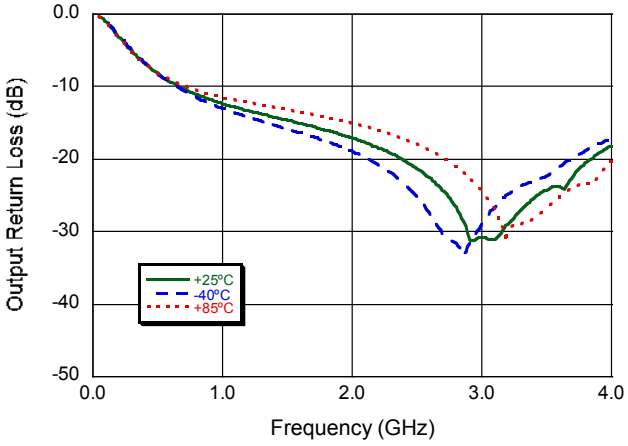

Input Return Loss (on state)

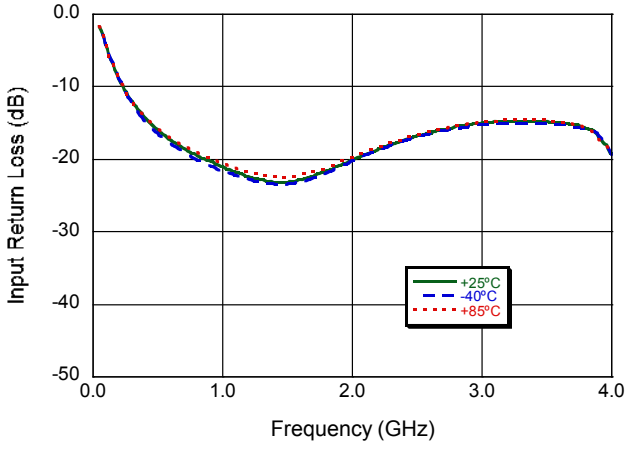


M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macomtech.com for additional data sheets and product information.


For further information and support please visit:
https://www.macomtech.com/content/customersupport

Applications Section—Low Frequency Measurement


Insertion Loss

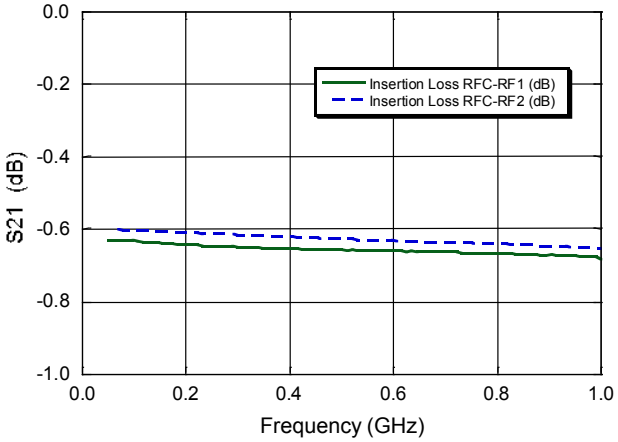

Isolation

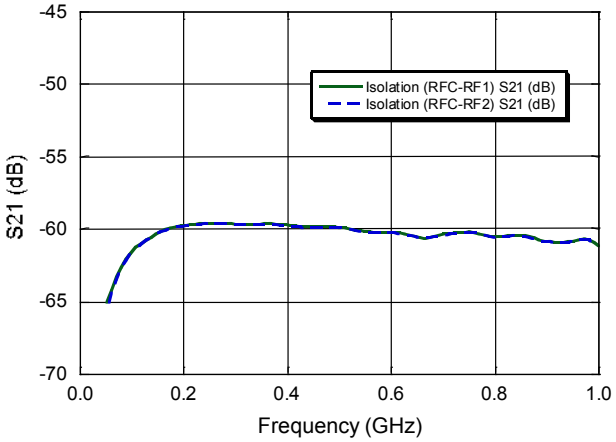

Return Loss

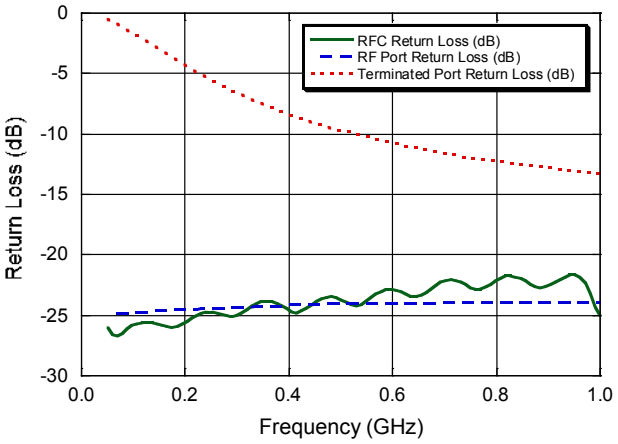

This data shows the MASW-008543 measured on an evaluation board with 0 Ω resistors. The board and connector loss have been removed.


0 Ω resistors can be used if negative control is available. To avoid changing the device bias points, the device should not be exposed to DC potentials on the RF ports.

With positive control MACOM recommends using DC-Blocking capacitors large enough that their X_C is insignificant at the frequency of use. At 50 MHz a capacitor value greater than 1000 pF is recommended.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macomtech.com for additional data sheets and product information.

For further information and support please visit:
https://www.macomtech.com/content/customersupport

Lead-Free MSOP-8-EP†

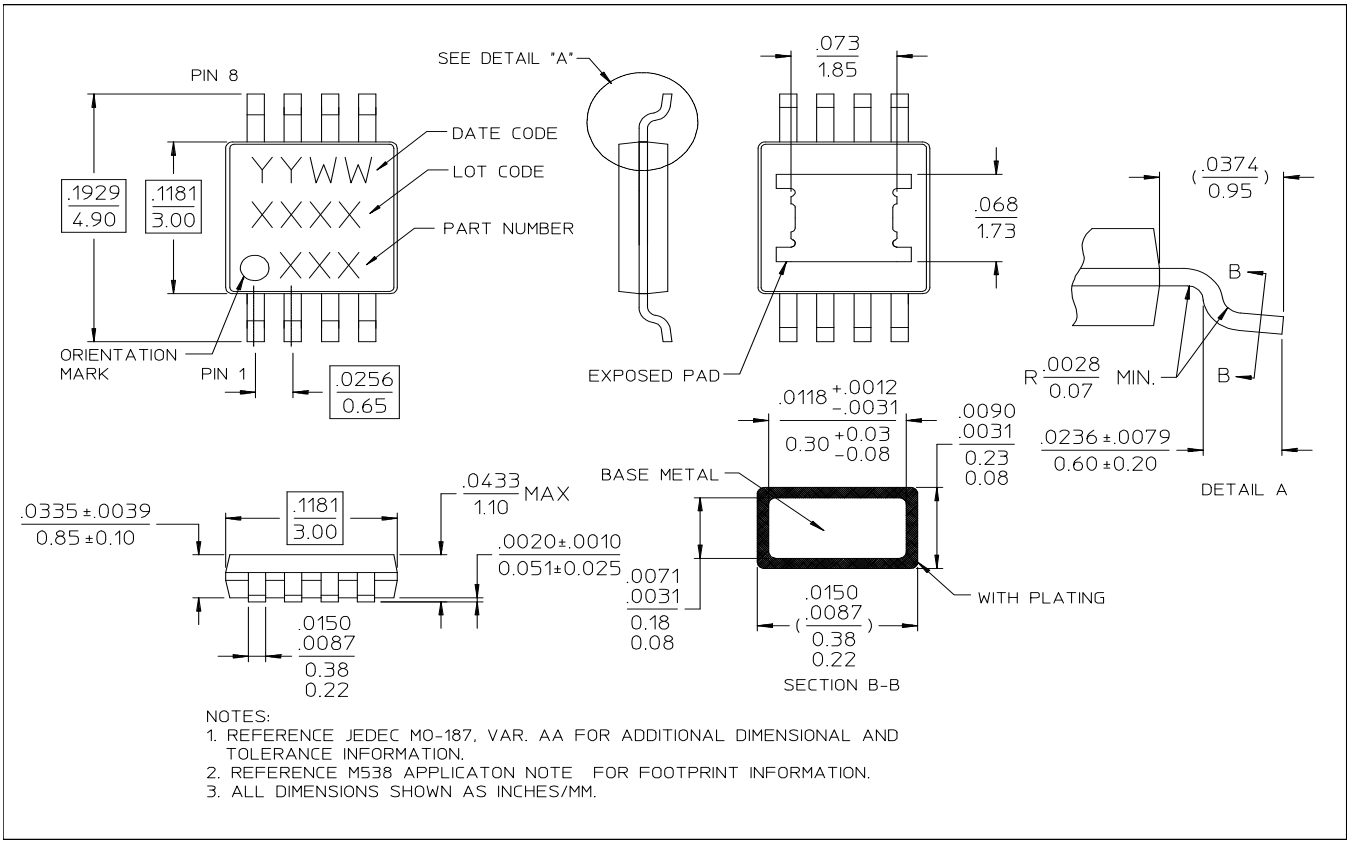

† Reference Application Note M538 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level 1 requirements.
Plating is 100% matte tin over copper.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macomtech.com for additional data sheets and product information.

For further information and support please visit:
https://www.macomtech.com/content/customersupport