



# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

**MAX5522-MAX5525**

## General Description

The MAX5522–MAX5525 are dual, 10-bit, ultra-low-power, voltage-output, digital-to-analog converters (DACs) offering rail-to-rail buffered voltage outputs. The DACs operate from a 1.8V to 5.5V supply and consume less than 5µA, making the devices suitable for low-power and low-voltage applications. A shutdown mode reduces overall current, including the reference input current, to just 0.18µA. The MAX5522–MAX5525 use a 3-wire serial interface that is compatible with SPI™, QSPI™, and MICROWIRE™.

Upon power-up, the MAX5522–MAX5525 outputs are driven to zero scale, providing additional safety for applications that drive valves or for other transducers that need to be off during power-up. The zero-scale outputs enable glitch-free power-up.

The MAX5522 accepts an external reference input and provides unity-gain outputs. The MAX5523 contains a precision internal reference and provides a buffered external reference output with unity-gain DAC outputs. The MAX5524 accepts an external reference input and provides force-sense outputs. The MAX5525 contains a precision internal reference and provides a buffered external reference output with force-sense DAC outputs.

The MAX5524/MAX5525 are available in a 4mm x 4mm x 0.8mm, 12-pin, thin QFN package. The MAX5522/MAX5523 are available in an 8-pin µMAX package. All devices are guaranteed over the extended -40°C to +85°C temperature range.

For 12-bit compatible devices, refer to the MAX5532–MAX5535 data sheet. For 8-bit compatible devices, refer to the MAX5512–MAX5515 data sheet.

## Applications

Portable Battery-Powered Devices  
Instrumentation  
Automatic Trimming and Calibration in Factory or Field  
Programmable Voltage and Current Sources  
Industrial Process Control and Remote Industrial Devices  
Remote Data Conversion and Monitoring  
Chemical Sensor Cell Bias for Gas Monitors  
Programmable LCD Bias

*SPI and QSPI are trademarks of Motorola, Inc.  
MICROWIRE is a trademark of National Semiconductor Corp.*

## Features

- ♦ Ultra-Low 5µA Supply Current
- ♦ Shutdown Mode Reduces Supply Current to 0.18µA (max)
- ♦ Single +1.8V to +5.5V Supply
- ♦ Small 4mm x 4mm x 0.8mm Thin QFN Package
- ♦ Internal Reference Sources 8mA of Current (MAX5523/MAX5525)
- ♦ Flexible Force-Sense-Configured Rail-to-Rail Output Buffers
- ♦ Fast 16MHz, 3-Wire, SPI-/QSPI-/MICROWIRE-Compatible Serial Interface
- ♦ TTL- and CMOS-Compatible Digital Inputs with Hysteresis
- ♦ Glitch-Free Outputs During Power-Up

## Ordering Information


| PART       | TEMP RANGE     | PIN-PACKAGE     |
|------------|----------------|-----------------|
| MAX5522EUA | -40°C to +85°C | 8 µMAX          |
| MAX5523EUA | -40°C to +85°C | 8 µMAX          |
| MAX5524ETC | -40°C to +85°C | 12 Thin QFN-EP* |
| MAX5525ETC | -40°C to +85°C | 12 Thin QFN-EP* |

\*EP = Exposed paddle (internally connected to GND).

## Selector Guide

| PART       | OUTPUTS     | REFERENCE | TOP MARK |
|------------|-------------|-----------|----------|
| MAX5522EUA | Unity gain  | External  | —        |
| MAX5523EUA | Unity gain  | Internal  | —        |
| MAX5524ETC | Force sense | External  | AACK     |
| MAX5525ETC | Force sense | Internal  | AACL     |

## Pin Configurations

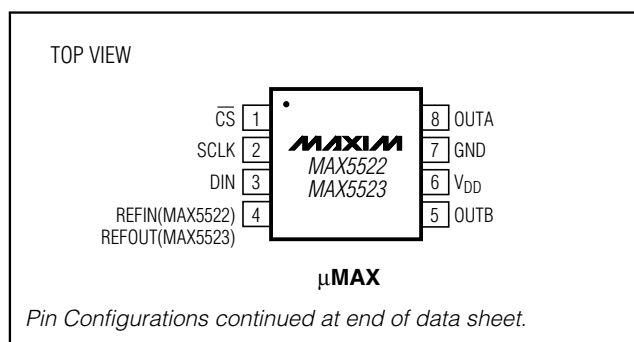

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## ABSOLUTE MAXIMUM RATINGS

$V_{DD}$  to GND ..... -0.3V to +6V  
 OUTA, OUTB to GND ..... -0.3V to ( $V_{DD}$  + 0.3V)  
 FBA, FBB to GND ..... -0.3V to ( $V_{DD}$  + 0.3V)  
 SCLK, DIN,  $\overline{CS}$  to GND ..... -0.3V to ( $V_{DD}$  + 0.3V)  
 REFIN, REFOUT to GND ..... -0.3V to ( $V_{DD}$  + 0.3V)  
 Continuous Power Dissipation ( $T_A$  = +70°C)  
     12-Pin Thin QFN (derate 16.9mW/°C above +70°C).....1349mW  
     8-Pin  $\mu$ MAX (derate 5.9mW/°C above +70°C) .....471mW

Operating Temperature Range ..... -40°C to +85°C  
 Storage Temperature Range ..... -65°C to +150°C  
 Junction Temperature ..... +150°C  
 Lead Temperature (soldering, 10s) ..... +300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

( $V_{DD}$  = +1.8V to +5.5V, OUT\_ unloaded,  $T_A$  =  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A$  = +25°C.)

| PARAMETER                                                   | SYMBOL | CONDITIONS                                                | MIN | TYP  | MAX | UNITS  |
|-------------------------------------------------------------|--------|-----------------------------------------------------------|-----|------|-----|--------|
| <b>STATIC ACCURACY (MAX5522/MAX5524 EXTERNAL REFERENCE)</b> |        |                                                           |     |      |     |        |
| Resolution                                                  | N      |                                                           | 10  |      |     | Bits   |
| Integral Nonlinearity (Note 1)                              | INL    | $V_{DD}$ = 5V, $V_{REF}$ = 4.096V                         |     | ±1   | ±4  | LSB    |
|                                                             |        | $V_{DD}$ = 1.8V, $V_{REF}$ = 1.024V                       |     | ±1   | ±4  |        |
| Differential Nonlinearity (Note 1)                          | DNL    | Guaranteed monotonic, $V_{DD}$ = 5V, $V_{REF}$ = 4.096V   |     | ±0.2 | ±1  | LSB    |
|                                                             |        | Guaranteed monotonic, $V_{DD}$ = 1.8V, $V_{REF}$ = 1.024V |     | ±0.2 | ±1  |        |
| Offset Error (Note 2)                                       | VOS    | $V_{DD}$ = 5V, $V_{REF}$ = 4.096V                         |     | ±1   | ±20 | mV     |
|                                                             |        | $V_{DD}$ = 1.8V, $V_{REF}$ = 1.024V                       |     | ±1   | ±20 |        |
| Offset-Error Temperature Drift                              |        |                                                           |     | ±2   |     | µV/°C  |
| Gain Error (Note 3)                                         | GE     | $V_{DD}$ = 5V, $V_{REF}$ = 4.096V                         |     | ±0.5 | ±2  | LSB    |
|                                                             |        | $V_{DD}$ = 1.8V, $V_{REF}$ = 1.024V                       |     | ±0.5 | ±2  |        |
| Gain-Error Temperature Coefficient                          |        |                                                           |     | ±4   |     | ppm/°C |
| Power-Supply Rejection Ratio                                | PSRR   | $1.8V \leq V_{DD} \leq 5.5V$                              |     | 85   |     | dB     |
| <b>STATIC ACCURACY (MAX5523/MAX5525 INTERNAL REFERENCE)</b> |        |                                                           |     |      |     |        |
| Resolution                                                  | N      |                                                           | 10  |      |     | Bits   |
| Integral Nonlinearity (Note 1)                              | INL    | $V_{DD}$ = 5V, $V_{REF}$ = 3.9V                           |     | ±1   | ±4  | LSB    |
|                                                             |        | $V_{DD}$ = 1.8V, $V_{REF}$ = 1.2V                         |     | ±1   | ±4  |        |
| Differential Nonlinearity (Note 1)                          | DNL    | Guaranteed monotonic, $V_{DD}$ = 5V, $V_{REF}$ = 3.9V     |     | ±0.2 | ±1  | LSB    |
|                                                             |        | Guaranteed monotonic, $V_{DD}$ = 1.8V, $V_{REF}$ = 1.2V   |     | ±0.2 | ±1  |        |
| Offset Error (Note 2)                                       | VOS    | $V_{DD}$ = 5V, $V_{REF}$ = 3.9V                           |     | ±1   | ±20 | mV     |
|                                                             |        | $V_{DD}$ = 1.8V, $V_{REF}$ = 1.2V                         |     | ±1   | ±20 |        |
| Offset-Error Temperature Drift                              |        |                                                           |     | ±2   |     | µV/°C  |
| Gain Error (Note 3)                                         | GE     | $V_{DD}$ = 5V, $V_{REF}$ = 3.9V                           |     | ±0.5 | ±2  | LSB    |
|                                                             |        | $V_{DD}$ = 1.8V, $V_{REF}$ = 1.2V                         |     | ±0.5 | ±2  |        |
| Gain-Error Temperature Coefficient                          |        |                                                           |     | ±4   |     | ppm/°C |

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

MAX5522-MAX5525

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = +1.8V$  to  $+5.5V$ ,  $OUT_{-}$  unloaded,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .)

| PARAMETER                               | SYMBOL  | CONDITIONS                                                            | MIN   | TYP     | MAX   | UNITS     |
|-----------------------------------------|---------|-----------------------------------------------------------------------|-------|---------|-------|-----------|
| Power-Supply Rejection Ratio            | PSRR    | $1.8V \leq V_{DD} \leq 5.5V$                                          |       | 85      |       | dB        |
| REFERENCE INPUT (MAX5522/MAX5524)       |         |                                                                       |       |         |       |           |
| Reference-Input Voltage Range           | VREFIN  |                                                                       | 0     |         | VDD   | V         |
| Reference-Input Impedance               | RREFIN  | Normal operation                                                      | 4.1   |         |       | MΩ        |
|                                         |         | In shutdown                                                           |       | 2.5     |       | GΩ        |
| REFERENCE OUTPUT (MAX5523/MAX5525)      |         |                                                                       |       |         |       |           |
| Initial Accuracy                        | VREFOUT | No external load, VDD = 1.8V                                          | 1.197 | 1.214   | 1.231 | V         |
|                                         |         | No external load, VDD = 2.5V                                          | 1.913 | 1.940   | 1.967 |           |
|                                         |         | No external load, VDD = 3V                                            | 2.391 | 2.425   | 2.459 |           |
|                                         |         | No external load, VDD = 5V                                            | 3.828 | 3.885   | 3.941 |           |
| Output-Voltage Temperature Coefficient  | VTEMPCO | TA = -40°C to +85°C (Note 4)                                          |       | 12      | 30    | ppm/°C    |
| Line Regulation                         |         | VREFOUT < VDD - 200mV (Note 5)                                        |       | 2       | 200   | μV/V      |
| Load Regulation                         |         | 0 ≤ IREFOUT ≤ 1mA, sourcing, VDD = 1.8V, VREF = 1.2V                  |       | 0.3     | 2     | μV/μA     |
|                                         |         | 0 ≤ IREFOUT ≤ 8mA, sourcing, VDD = 5V, VREF = 3.9V                    |       | 0.3     | 2     |           |
|                                         |         | -150μA ≤ IREFOUT ≤ 0, sinking                                         |       | 0.2     |       |           |
| Output Noise Voltage                    |         | 0.1Hz to 10Hz, VREF = 3.9V                                            |       | 150     |       | μVP-P     |
|                                         |         | 10Hz to 10kHz, VREF = 3.9V                                            |       | 600     |       |           |
|                                         |         | 0.1Hz to 10Hz, VREF = 1.2V                                            |       | 50      |       |           |
|                                         |         | 10Hz to 10kHz, VREF = 1.2V                                            |       | 450     |       |           |
| Short-Circuit Current (Note 6)          |         | VDD = 5V                                                              |       | 30      |       | mA        |
|                                         |         | VDD = 1.8V                                                            |       | 14      |       |           |
| Capacitive Load Stability Range         |         | (Note 7)                                                              |       | 0 to 10 |       | nF        |
| Thermal Hysteresis                      |         | (Note 8)                                                              |       | 200     |       | ppm       |
| Reference Power-Up Time (from Shutdown) |         | REFOUT unloaded, VDD = 5V                                             |       | 5.4     |       | ms        |
|                                         |         | REFOUT unloaded, VDD = 1.8V                                           |       | 4.4     |       |           |
| Long-Term Stability                     |         |                                                                       |       | 200     |       | ppm/1khrs |
| DAC OUTPUTS (OUTA, OUTB)                |         |                                                                       |       |         |       |           |
| Capacitive Driving Capability           | CL      |                                                                       |       | 1000    |       | pF        |
| Short-Circuit Current (Note 6)          |         | VDD = 5V, VOUT set to full scale, OUT shorted to GND, source current  |       |         | 65    | mA        |
|                                         |         | VDD = 5V VOUT set to 0V, OUT shorted to VDD, sink current             |       |         | 65    |           |
|                                         |         | VDD = 1.8V, VOUT set to full scale OUT shorted to GND, source current |       |         | 14    |           |
|                                         |         | VDD = 1.8V, VOUT set to 0V, OUT shorted to VDD, sink current          |       |         | 14    |           |

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = +1.8V$  to  $+5.5V$ ,  $OUT_{-}$  unloaded,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .)

| PARAMETER                                    | SYMBOL            | CONDITIONS                                           |                                | MIN                   | TYP  | MAX               | UNITS |
|----------------------------------------------|-------------------|------------------------------------------------------|--------------------------------|-----------------------|------|-------------------|-------|
| DAC Power-Up Time                            |                   | Coming out of shutdown (MAX5522/MAX5524)             | V <sub>DD</sub> = 5V           | 3                     |      | μs                |       |
|                                              |                   |                                                      | V <sub>DD</sub> = 1.8V         | 3.8                   |      |                   |       |
|                                              |                   | Coming out of standby (MAX5523/MAX5525)              | V <sub>DD</sub> = 1.8V to 5.5V | 0.4                   |      |                   |       |
| Output Power-Up Glitch                       |                   | C <sub>L</sub> = 100pF                               |                                | 10                    |      | mV                |       |
| FB_ Input Current                            |                   |                                                      |                                | 10                    |      | pA                |       |
| DIGITAL INPUTS (SCLK, DIN, $\overline{CS}$ ) |                   |                                                      |                                |                       |      |                   |       |
| Input High Voltage                           | V <sub>IH</sub>   | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V                        |                                | 2.4                   |      | V                 |       |
|                                              |                   | 2.7V < V <sub>DD</sub> ≤ 3.6V                        |                                | 2.0                   |      |                   |       |
|                                              |                   | 1.8V ≤ V <sub>DD</sub> ≤ 2.7V                        |                                | 0.7 × V <sub>DD</sub> |      |                   |       |
| Input Low Voltage                            | V <sub>IL</sub>   | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V                        |                                | 0.8                   |      | V                 |       |
|                                              |                   | 2.7V < V <sub>DD</sub> ≤ 3.6V                        |                                | 0.6                   |      |                   |       |
|                                              |                   | 1.8V ≤ V <sub>DD</sub> ≤ 2.7V                        |                                | 0.3 × V <sub>DD</sub> |      |                   |       |
| Input Leakage Current                        | I <sub>IN</sub>   | (Note 9)                                             |                                | ±0.05                 | ±0.5 | μA                |       |
| Input Capacitance                            | C <sub>IN</sub>   |                                                      |                                | 10                    |      | pF                |       |
| DYNAMIC PERFORMANCE                          |                   |                                                      |                                |                       |      |                   |       |
| Voltage-Output Slew Rate                     | SR                | Positive and negative (Note 10)                      |                                | 10                    |      | V/ms              |       |
| Voltage-Output Settling Time                 |                   | 0.1 to 0.9 of full scale to within 0.5 LSB (Note 10) |                                | 660                   |      | μs                |       |
| Output Noise Voltage                         |                   | 0.1Hz to 10Hz                                        | V <sub>DD</sub> = 5V           | 80                    |      | μV <sub>P-P</sub> |       |
|                                              |                   |                                                      | V <sub>DD</sub> = 1.8V         | 55                    |      |                   |       |
|                                              |                   | 10Hz to 10kHz                                        | V <sub>DD</sub> = 5V           | 620                   |      |                   |       |
|                                              |                   |                                                      | V <sub>DD</sub> = 1.8V         | 476                   |      |                   |       |
| POWER REQUIREMENTS                           |                   |                                                      |                                |                       |      |                   |       |
| Supply Voltage Range                         | V <sub>DD</sub>   |                                                      |                                | 1.8                   | 5.5  | V                 |       |
| Supply Current (Note 9)                      | I <sub>DD</sub>   | MAX5523/MAX5525                                      | V <sub>DD</sub> = 5V           | 7.0                   | 8.0  | μA                |       |
|                                              |                   |                                                      | V <sub>DD</sub> = 3V           | 6.4                   | 8.0  |                   |       |
|                                              |                   |                                                      | V <sub>DD</sub> = 1.8V         | 7.0                   | 8.0  |                   |       |
|                                              |                   | MAX5522/MAX5524                                      | V <sub>DD</sub> = 5V           | 3.8                   | 5.0  |                   |       |
|                                              |                   |                                                      | V <sub>DD</sub> = 3V           | 3.8                   | 5.0  |                   |       |
|                                              |                   |                                                      | V <sub>DD</sub> = 1.8V         | 4.7                   | 6.0  |                   |       |
| Standby Supply Current                       | I <sub>DDSD</sub> | MAX5523/MAX5525 (Note 9)                             | V <sub>DD</sub> = 5V           | 3.3                   | 4.5  | μA                |       |
|                                              |                   |                                                      | V <sub>DD</sub> = 3V           | 2.8                   | 4.0  |                   |       |
|                                              |                   |                                                      | V <sub>DD</sub> = 1.8V         | 2.4                   | 3.5  |                   |       |
| Shutdown Supply Current                      | I <sub>DDPD</sub> | (Note 9)                                             |                                | 0.05                  | 0.25 | μA                |       |

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

MAX5522-MAX5525

## TIMING CHARACTERISTICS

( $V_{DD} = +4.5V$  to  $+5.5V$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)

| PARAMETER                                                                       | SYMBOL            | CONDITIONS | MIN | TYP | MAX  | UNITS |
|---------------------------------------------------------------------------------|-------------------|------------|-----|-----|------|-------|
| <b>TIMING CHARACTERISTICS (<math>V_{DD} = 4.5V</math> to <math>5.5V</math>)</b> |                   |            |     |     |      |       |
| Serial Clock Frequency                                                          | f <sub>SCLK</sub> |            | 0   |     | 16.7 | MHz   |
| DIN to SCLK Rise Setup Time                                                     | t <sub>DS</sub>   |            | 15  |     |      | ns    |
| DIN to SCLK Rise Hold Time                                                      | t <sub>DH</sub>   |            | 0   |     |      | ns    |
| SCLK Pulse-Width High                                                           | t <sub>CH</sub>   |            | 24  |     |      | ns    |
| SCLK Pulse-Width Low                                                            | t <sub>CL</sub>   |            | 24  |     |      | ns    |
| $\overline{CS}$ Pulse-Width High                                                | t <sub>CSW</sub>  |            | 100 |     |      | ns    |
| SCLK Rise to $\overline{CS}$ Rise Hold Time                                     | t <sub>CSH</sub>  |            | 0   |     |      | ns    |
| $\overline{CS}$ Fall to SCLK Rise Setup Time                                    | t <sub>CSS</sub>  |            | 20  |     |      | ns    |
| SCLK Fall to $\overline{CS}$ Fall Setup                                         | t <sub>CSO</sub>  |            | 0   |     |      | ns    |
| $\overline{CS}$ Rise to SCK Rise Hold Time                                      | t <sub>CS1</sub>  |            | 20  |     |      | ns    |

## TIMING CHARACTERISTICS

( $V_{DD} = +1.8V$  to  $+5.5V$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)

| PARAMETER                                                                       | SYMBOL            | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------------------------------------------------------|-------------------|------------|-----|-----|-----|-------|
| <b>TIMING CHARACTERISTICS (<math>V_{DD} = 1.8V</math> to <math>5.5V</math>)</b> |                   |            |     |     |     |       |
| Serial Clock Frequency                                                          | f <sub>SCLK</sub> |            | 0   |     | 10  | MHz   |
| DIN to SCLK Rise Setup Time                                                     | t <sub>DS</sub>   |            | 24  |     |     | ns    |
| DIN to SCLK Rise Hold Time                                                      | t <sub>DH</sub>   |            | 0   |     |     | ns    |
| SCLK Pulse-Width High                                                           | t <sub>CH</sub>   |            | 40  |     |     | ns    |
| SCLK Pulse-Width Low                                                            | t <sub>CL</sub>   |            | 40  |     |     | ns    |
| $\overline{CS}$ Pulse-Width High                                                | t <sub>CSW</sub>  |            | 150 |     |     | ns    |
| SCLK Rise to $\overline{CS}$ Rise Hold Time                                     | t <sub>CSH</sub>  |            | 0   |     |     | ns    |
| $\overline{CS}$ Fall to SCLK Rise Setup Time                                    | t <sub>CSS</sub>  |            | 30  |     |     | ns    |
| SCLK Fall to $\overline{CS}$ Fall Setup                                         | t <sub>CSO</sub>  |            | 0   |     |     | ns    |
| $\overline{CS}$ Rise to SCK Rise Hold Time                                      | t <sub>CS1</sub>  |            | 30  |     |     | ns    |

**Note 1:** Linearity is tested within codes 24 to 1020.

**Note 2:** Offset is tested at code 24.

**Note 3:** Gain is tested at code 1023. For the MAX5524/MAX5525, FB<sub>-</sub> is connected to its respective OUT<sub>-</sub>.

**Note 4:** Guaranteed by design. Not production tested

**Note 5:**  $V_{DD}$  must be a minimum of 1.8V.

**Note 6:** Outputs can be shorted to  $V_{DD}$  or GND indefinitely, provided that package power dissipation is not exceeded.

**Note 7:** Optimal noise performance is at 2nF load capacitance.

**Note 8:** Thermal hysteresis is defined as the change in the initial  $+25^\circ C$  output voltage after cycling the device from  $T_{MAX}$  to  $T_{MIN}$ .

**Note 9:** All digital inputs at  $V_{DD}$  or GND.


**Note 10:** Load = 10k $\Omega$  in parallel with 100pF,  $V_{DD} = 5V$ ,  $V_{REF} = 4.096V$  (MAX5522/MAX5524) or  $V_{REF} = 3.9V$  (MAX5523/MAX5525).

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs


## Typical Operating Characteristics

( $V_{DD} = 5.0V$ ,  $V_{REF} = 4.096V$  (MAX5522/MAX5524),  $V_{REF} = 3.9V$  (MAX5523/MAX5525),  $T_A = +25^\circ C$ , unless otherwise noted.)


**SUPPLY CURRENT vs. SUPPLY VOLTAGE  
(MAX5522/MAX5524)**

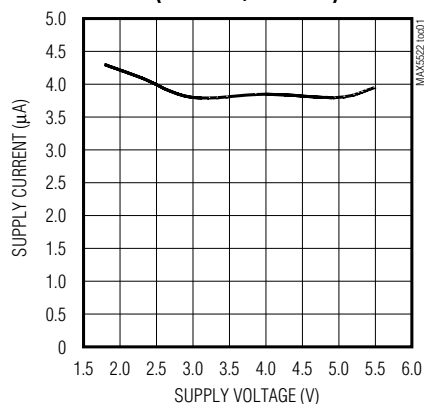


**SUPPLY CURRENT vs. TEMPERATURE  
(MAX5522/MAX5524)**

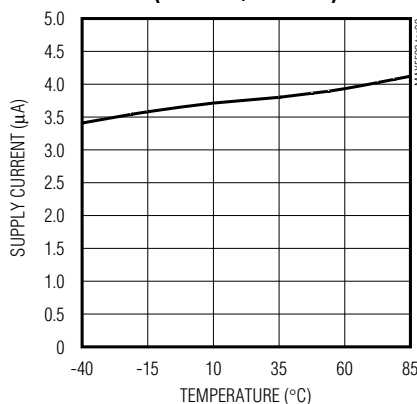


**SUPPLY CURRENT vs. SUPPLY VOLTAGE  
(MAX5523/MAX5525)**

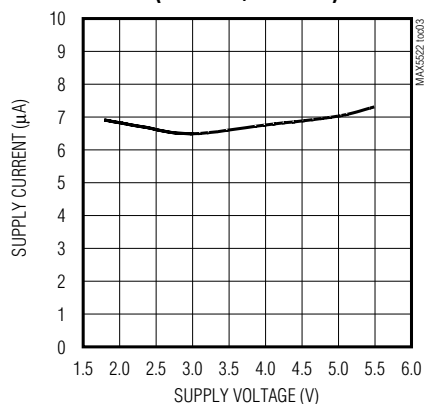


**SUPPLY CURRENT vs. TEMPERATURE  
(MAX5523/MAX5525)**

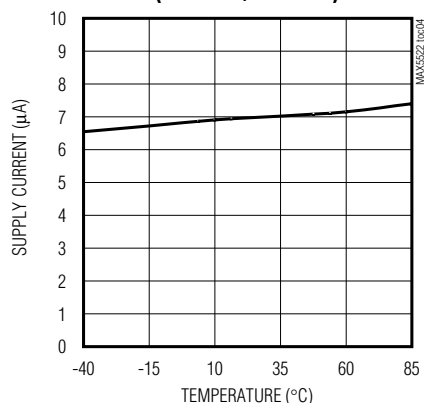


**SHUTDOWN SUPPLY CURRENT  
vs. TEMPERATURE (MAX5522/MAX5524)**

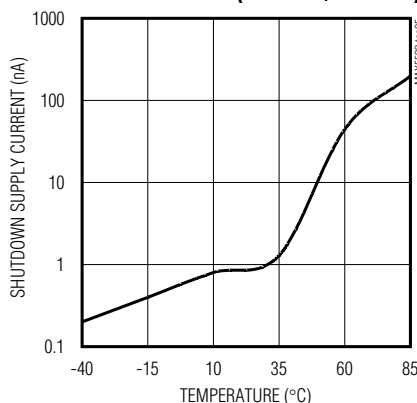


**SHUTDOWN SUPPLY CURRENT  
vs. TEMPERATURE (MAX5523/MAX5525)**

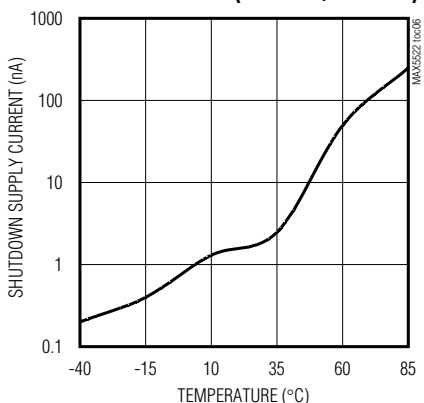


**STANDBY SUPPLY CURRENT  
vs. TEMPERATURE (MAX5523/MAX5525)**

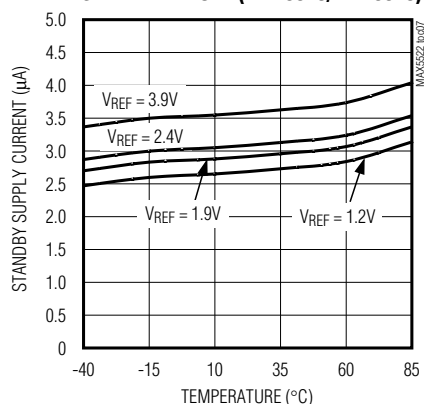

**SUPPLY CURRENT  
vs. CLOCK FREQUENCY**

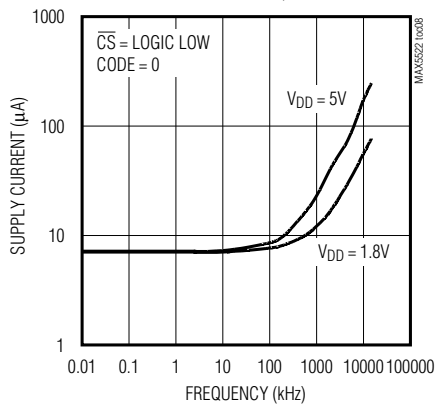

**SUPPLY CURRENT  
vs. LOGIC INPUT VOLTAGE**









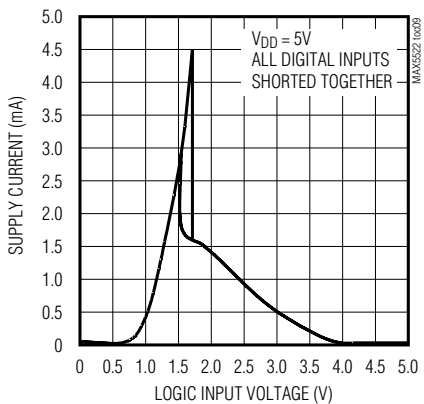


# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Typical Operating Characteristics (continued)

( $V_{DD} = 5.0V$ ,  $V_{REF} = 4.096V$  (MAX5522/MAX5524),  $V_{REF} = 3.9V$  (MAX5523/MAX54525),  $T_A = +25^\circ C$ , unless otherwise noted.)










MAX5522-MAX5525

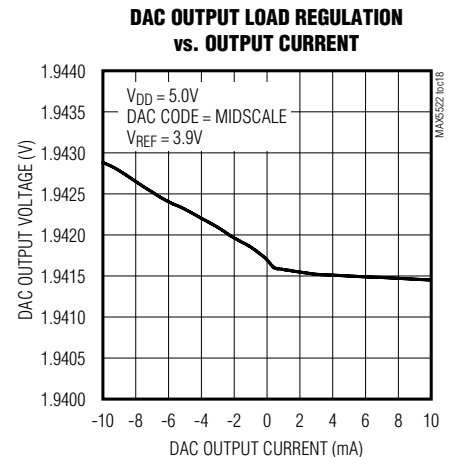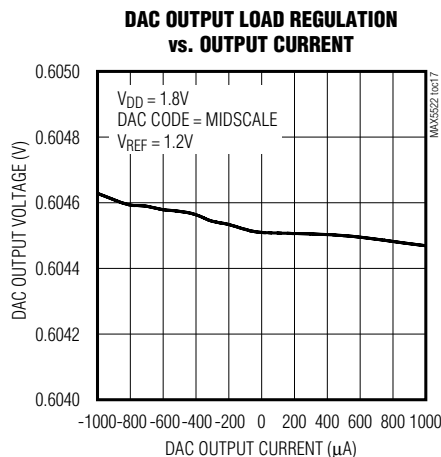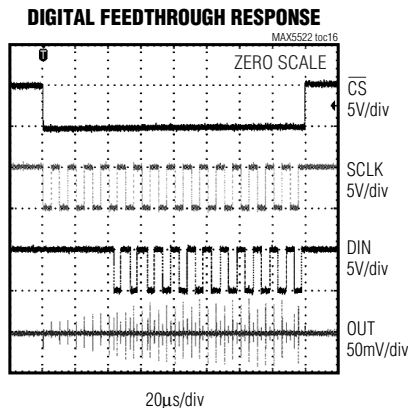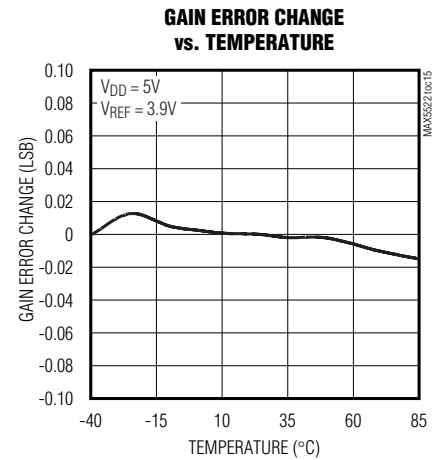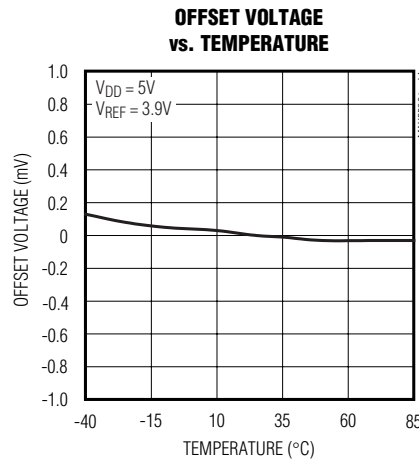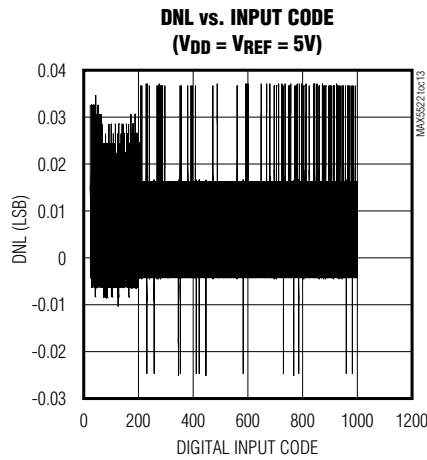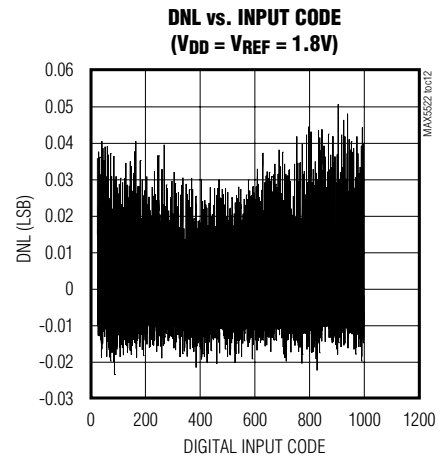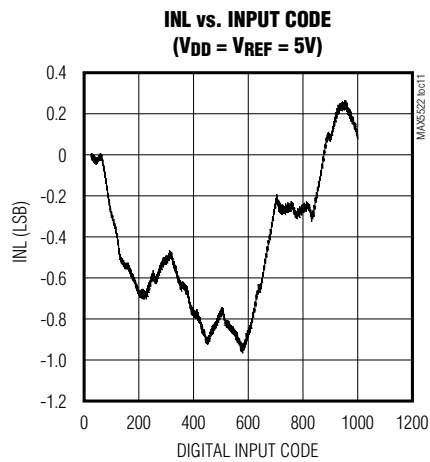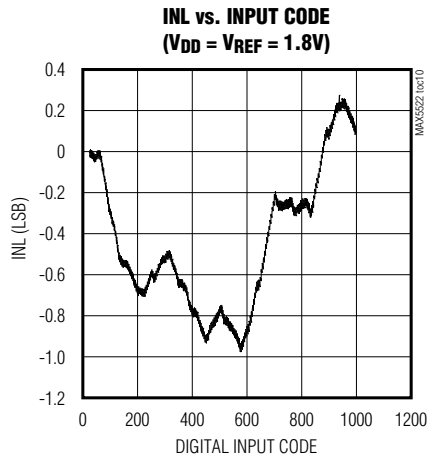

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Typical Operating Characteristics (continued)








( $V_{DD} = 5.0V$ ,  $V_{REF} = 4.096V$  (MAX5522/MAX5524),  $V_{REF} = 3.9V$  (MAX5523/MAX5525),  $T_A = +25^\circ C$ , unless otherwise noted.)

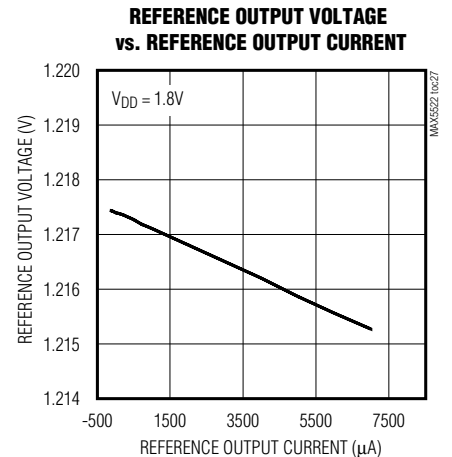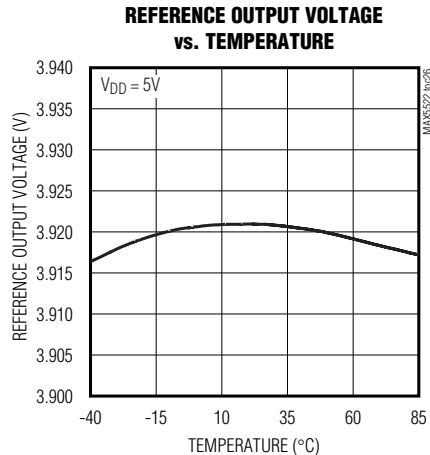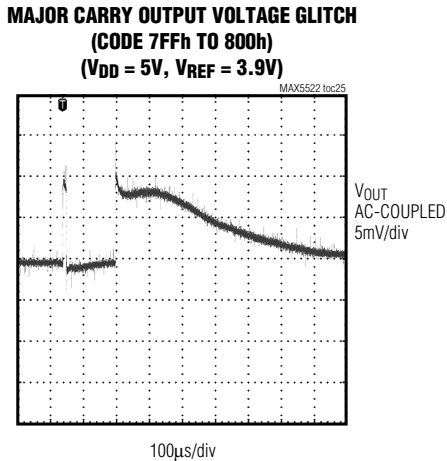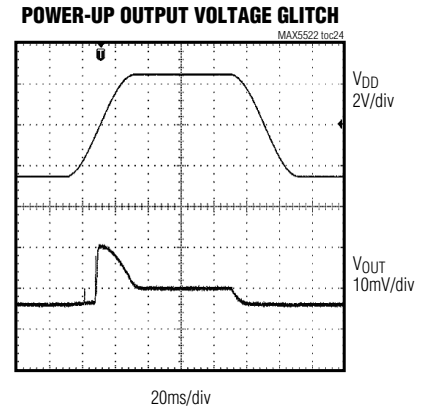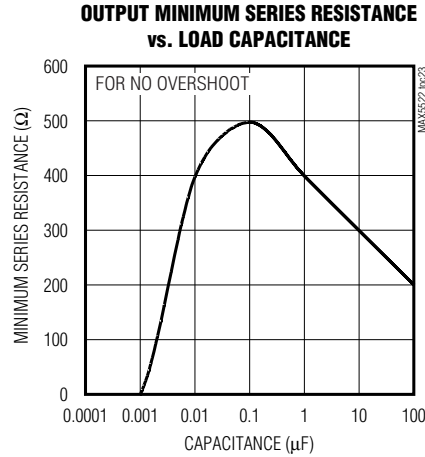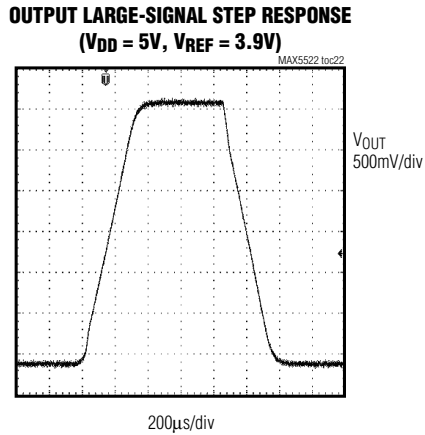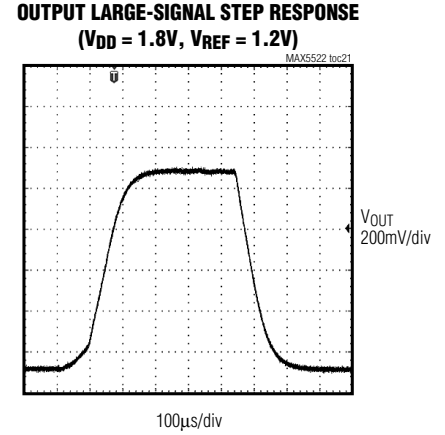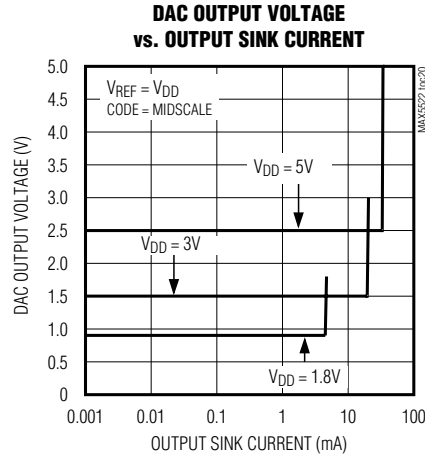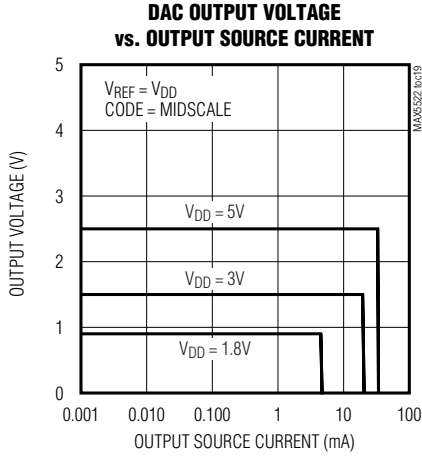

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Typical Operating Characteristics (continued)

( $V_{DD} = 5.0V$ ,  $V_{REF} = 4.096V$  (MAX5522/MAX5524),  $V_{REF} = 3.9V$  (MAX5523/MAX54525),  $T_A = +25^\circ C$ , unless otherwise noted.)

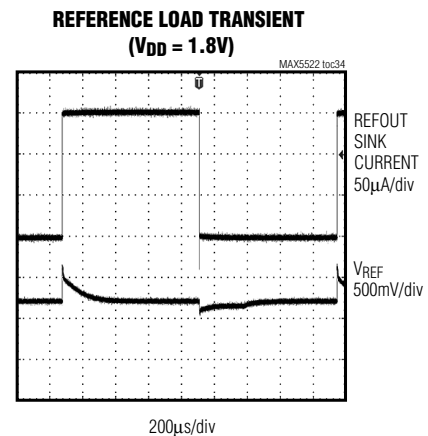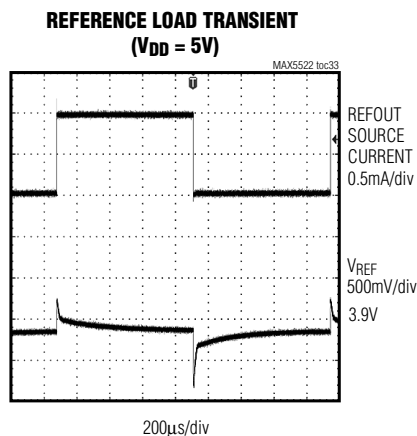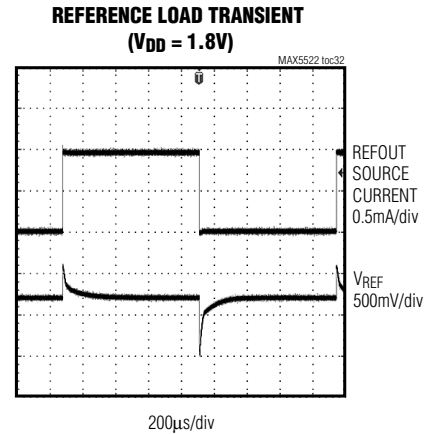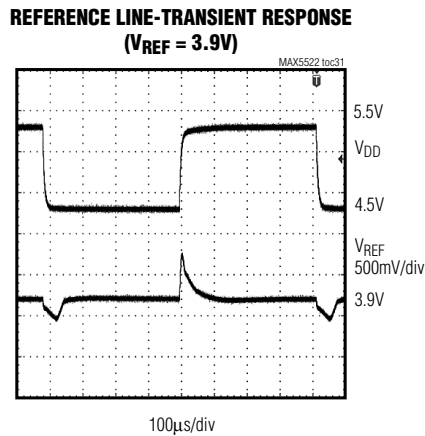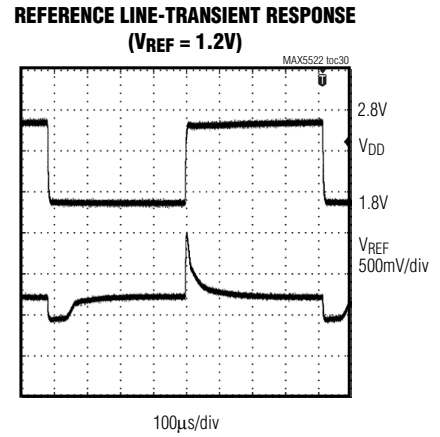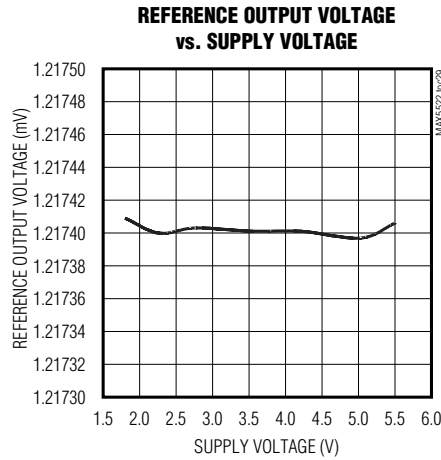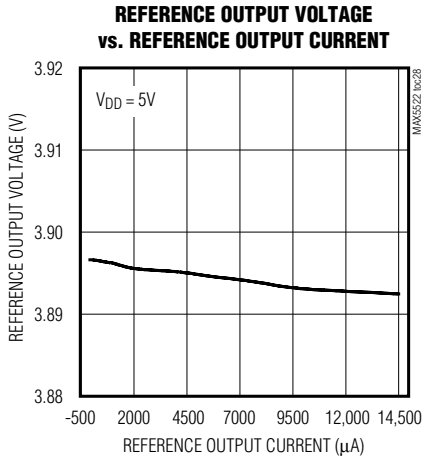


MAX5522-MAX5525

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs


## Typical Operating Characteristics (continued)

( $V_{DD} = 5.0V$ ,  $V_{REF} = 4.096V$  (MAX5522/MAX5524),  $V_{REF} = 3.9V$  (MAX5523/MAX54525),  $T_A = +25^\circ C$ , unless otherwise noted.)


**REFERENCE LOAD TRANSIENT**  
( $V_{DD} = 5V$ )

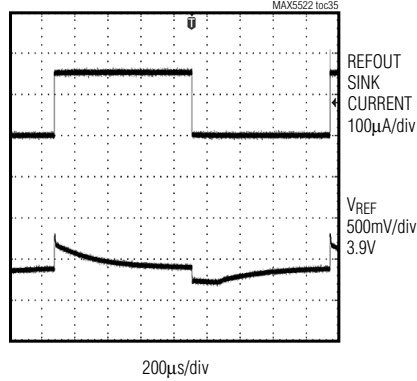


**REFERENCE PSRR vs. FREQUENCY**

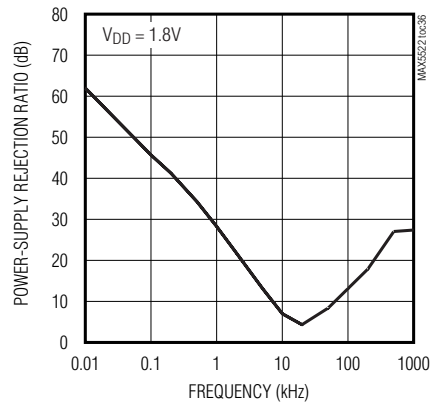


**REFERENCE PSRR vs. FREQUENCY**

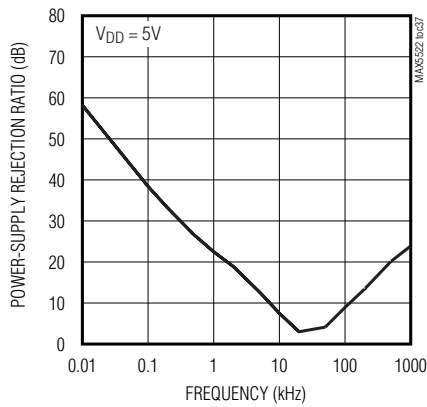


**REFERENCE OUTPUT NOISE**  
(0.1Hz TO 10Hz) ( $V_{DD} = 1.8V$ ,  $V_{REF} = 1.2V$ )

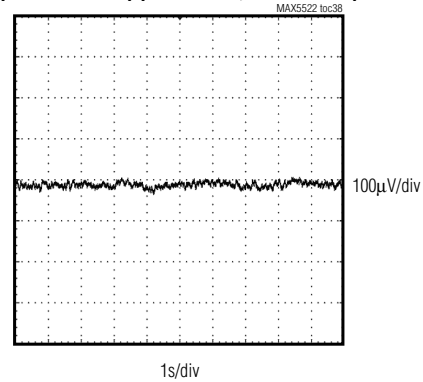

**REFERENCE OUTPUT NOISE**  
(0.1Hz TO 10Hz) ( $V_{DD} = 5V$ ,  $V_{REF} = 3.9V$ )

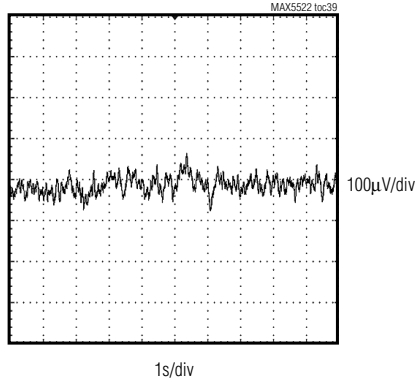

**DAC-TO-DAC CROSSTALK**

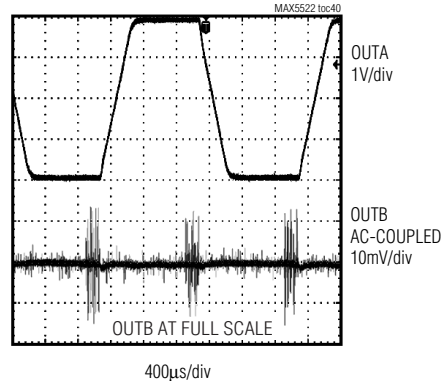


# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Pin Description

| PIN     |         |         |         | NAME                   | FUNCTION                                                                                                                   |
|---------|---------|---------|---------|------------------------|----------------------------------------------------------------------------------------------------------------------------|
| MAX5522 | MAX5523 | MAX5524 | MAX5525 |                        |                                                                                                                            |
| 1       | 1       | 1       | 1       | $\overline{\text{CS}}$ | Active-Low Digital Chip-Select Input                                                                                       |
| 2       | 2       | 2       | 2       | SCLK                   | Serial-Interface Clock Input                                                                                               |
| 3       | 3       | 3       | 3       | DIN                    | Serial-Interface Data Input                                                                                                |
| 4       | —       | 4       | —       | REFIN                  | Reference Input                                                                                                            |
| —       | 4       | —       | 4       | REFOUT                 | Reference Output                                                                                                           |
| —       | —       | 5, 11   | 5, 11   | N.C.                   | No Connection. Leave N.C. inputs unconnected (floating) or connected to GND.                                               |
| —       | —       | 6       | 6       | FBB                    | Channel B Feedback Input                                                                                                   |
| 5       | 5       | 7       | 7       | OUTB                   | Channel B Analog Voltage Output                                                                                            |
| 6       | 6       | 8       | 8       | V <sub>DD</sub>        | Power Input. Connect V <sub>DD</sub> to a 1.8V to 5.5V power supply. Bypass V <sub>DD</sub> to GND with a 0.1μF capacitor. |
| 7       | 7       | 9       | 9       | GND                    | Ground                                                                                                                     |
| 8       | 8       | 10      | 10      | OUTA                   | Channel A Analog Voltage Output                                                                                            |
| —       | —       | 12      | 12      | FBA                    | Channel A Feedback Input                                                                                                   |
| —       | —       | EP      | EP      | Exposed Paddle         | Exposed Paddle. Connect EP to GND.                                                                                         |



MAX5522-MAX5525

## Functional Diagrams

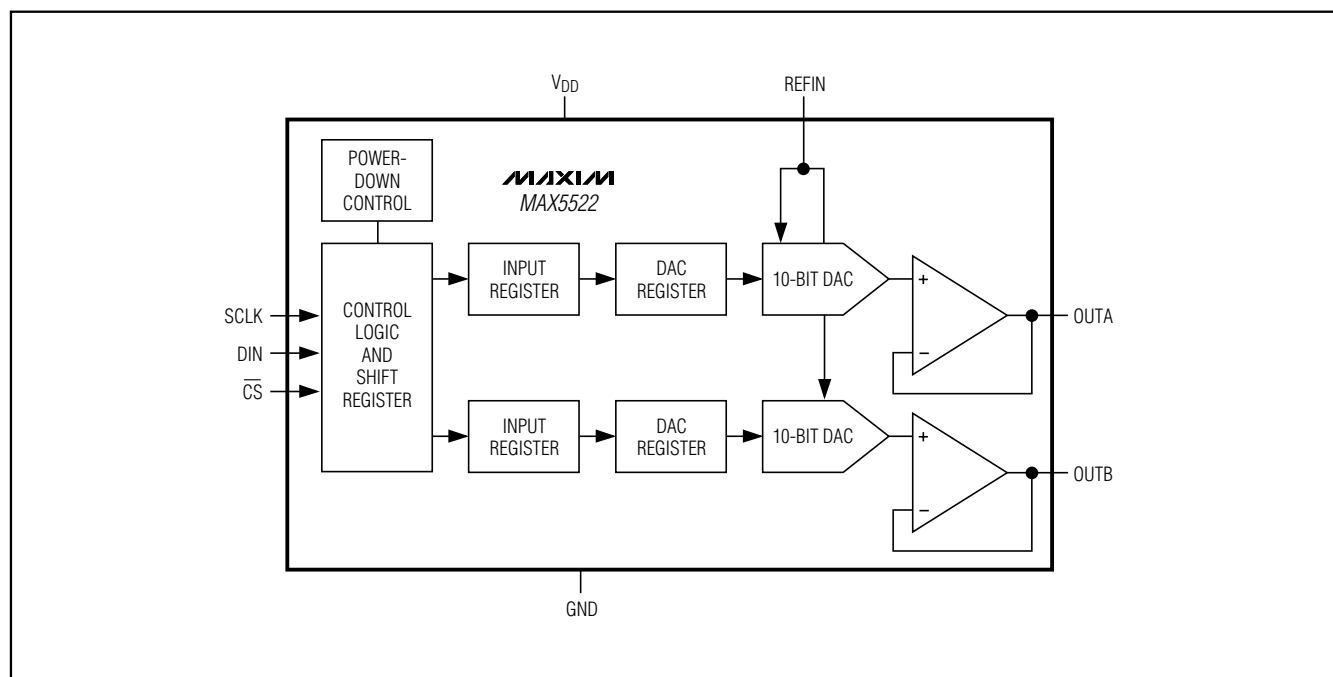

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Functional Diagrams (continued)

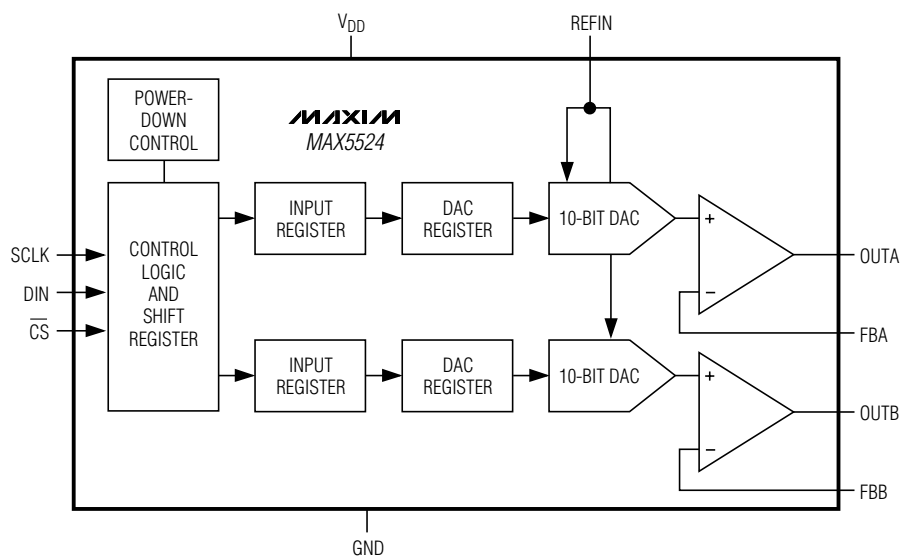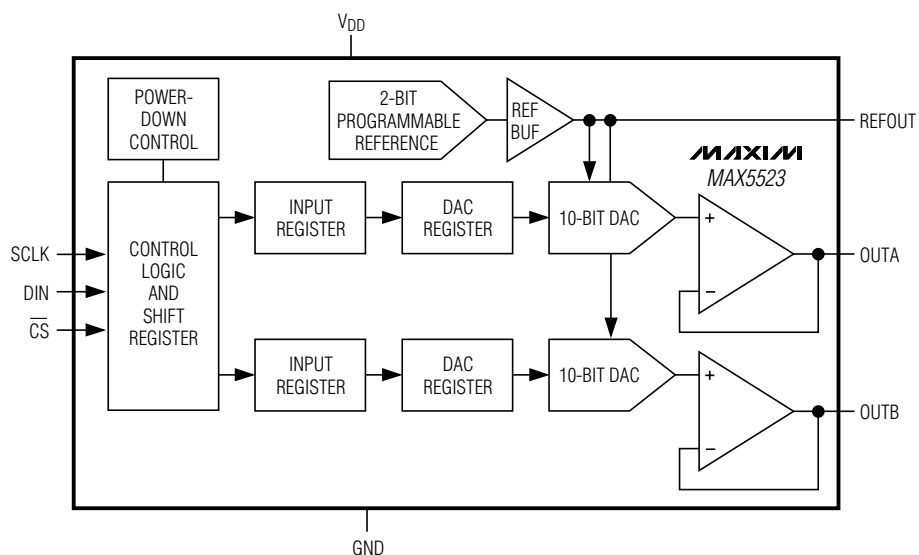

**MAX5522-MAX5525**

The diagram illustrates the internal architecture of the MAX5525 precision centiV-to-Volts converter. It features a central chip with the following components and connections:

- Inputs:** SCLK, DIN, and CS (active low) are provided to the CONTROL LOGIC AND SHIFT REGISTER.
- Internal Blocks:**
  - POWER-DOWN CONTROL:** Connected to the CONTROL LOGIC AND SHIFT REGISTER.
  - CONTROL LOGIC AND SHIFT REGISTER:** Manages the data flow through the registers and DACs.
  - 2-BIT PROGRAMMABLE REFERENCE:** Provides a reference voltage to the REF BUF.
  - REF BUF:** Buffers the reference voltage, providing REFOUT and a reference to the DACs.
  - Two Parallel DAC Channels:** Each channel consists of an INPUT REGISTER, a DAC REGISTER, and a 10-BIT DAC.
  - Op-Amp Buffers:** The DAC outputs are connected to op-amp buffers (OUTA and OUTB) with feedback (FBA and FBB).
- Power and Ground:** The chip is powered by VDD and GND.
- MAXIM MAX5525:** The logo is displayed on the right side of the chip.

## 13

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

Table 1. Serial Write Data Format

| CONTROL |    |    |    | DATA BITS |    |    |    |    |    |    |    |    |    |    |    |     |
|---------|----|----|----|-----------|----|----|----|----|----|----|----|----|----|----|----|-----|
| MSB     |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    | LSB |
| C3      | C2 | C1 | C0 | D9        | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | S1 | S0 |     |

Sub-bits S1 to S0 must be set to zero for proper operation.

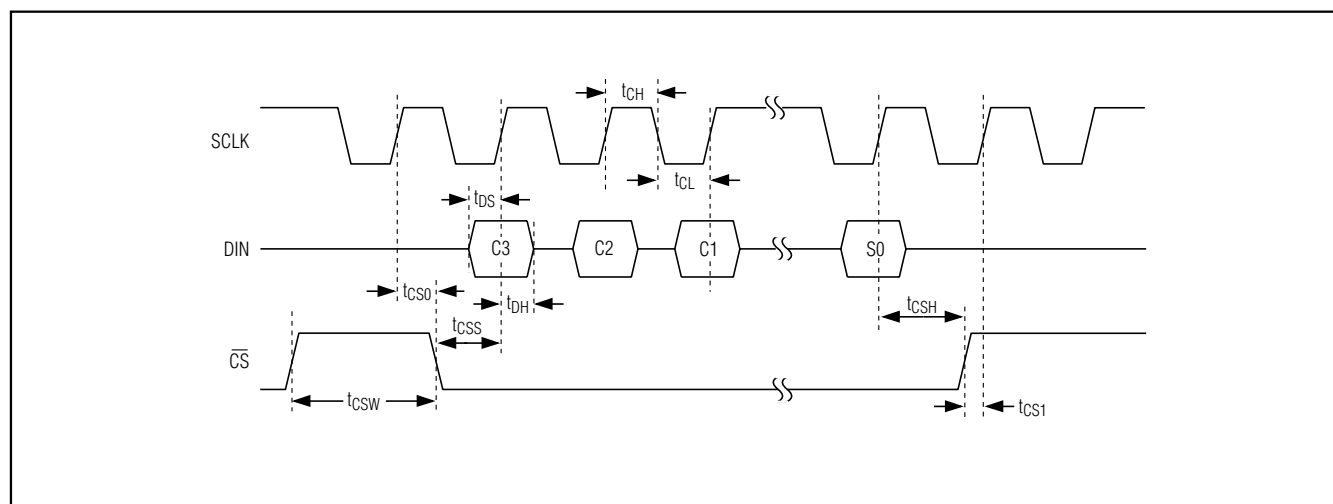


Figure 1. Timing Diagram

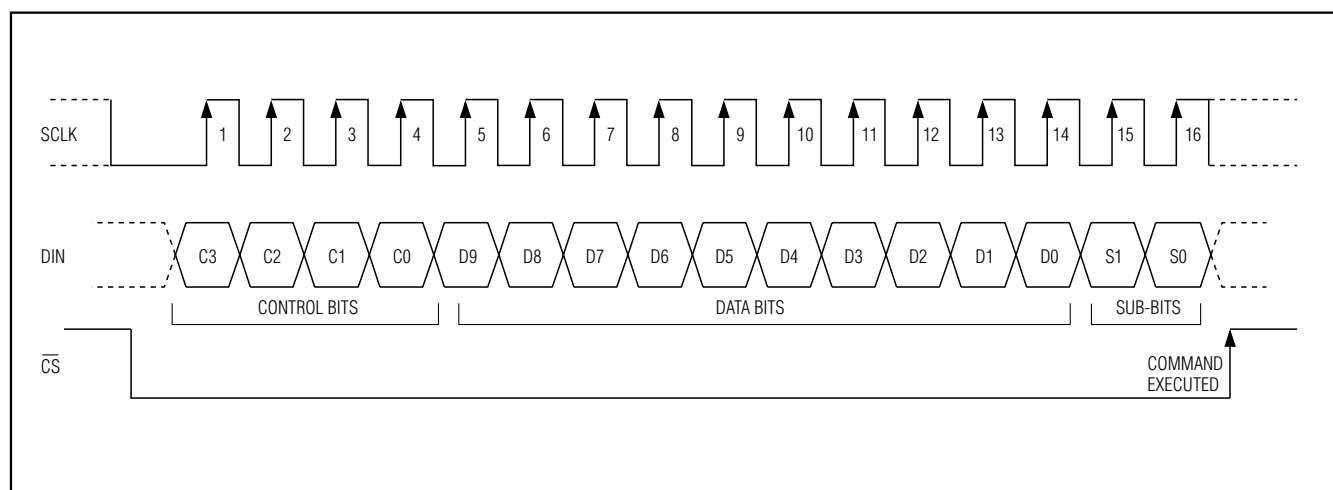


Figure 2. Register Loading Diagram

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

**Table 2. Serial-Interface Programming Commands**

| CONTROL BITS |    |    |    | INPUT DATA       | SUB-BITS  | FUNCTION                                                                                                                                                                                                                                                                      |
|--------------|----|----|----|------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C3           | C2 | C1 | C0 | D9–D0            | S1 AND S0 |                                                                                                                                                                                                                                                                               |
| 0            | 0  | 0  | 0  | XXXXXXXXXX       | 00        | No operation; command is ignored.                                                                                                                                                                                                                                             |
| 0            | 0  | 0  | 1  | 10-bit data      | 00        | Load input register A from shift register; DAC registers unchanged; DAC outputs unchanged.                                                                                                                                                                                    |
| 0            | 0  | 1  | 0  | 10-bit data      | 00        | Load input register B from shift register; DAC registers unchanged; DAC outputs unchanged.                                                                                                                                                                                    |
| 0            | 0  | 1  | 1  | —                | —         | Command reserved. Do not use.                                                                                                                                                                                                                                                 |
| 0            | 1  | 0  | 0  | —                | —         | Command reserved. Do not use.                                                                                                                                                                                                                                                 |
| 0            | 1  | 0  | 1  | —                | —         | Command reserved. Do not use.                                                                                                                                                                                                                                                 |
| 0            | 1  | 1  | 0  | —                | —         | Command reserved. Do not use.                                                                                                                                                                                                                                                 |
| 0            | 1  | 1  | 1  | —                | —         | Command reserved. Do not use.                                                                                                                                                                                                                                                 |
| 1            | 0  | 0  | 0  | 10-bit data      | 00        | Load DAC registers A and B from respective input registers; DAC outputs A and B updated; MAX5523/MAX5525 enter normal operation if in standby or shutdown; MAX5522/MAX5524 enter normal operation if in shutdown.                                                             |
| 1            | 0  | 0  | 1  | 10-bit data      | 00        | Load input register A and DAC register A from shift register; DAC output A updated; Load DAC register B from input register B; DAC output B updated; MAX5523/MAX5525 enter normal operation if in standby or shutdown; MAX5522/MAX5524 enter normal operation if in shutdown. |
| 1            | 0  | 1  | 0  | 10-bit data      | 00        | Load input register B and DAC register B from shift register; DAC output B updated; Load DAC register A from input register A; DAC output A updated; MAX5523/MAX5525 enter normal operation if in standby or shutdown; MAX5522/MAX5524 enter normal operation if in shutdown. |
| 1            | 0  | 1  | 1  | —                | —         | Command reserved. Do not use.                                                                                                                                                                                                                                                 |
| 1            | 1  | 0  | 0  | D9, D8, XXXXXXXX | 00        | MAX5523/MAX5525 enter standby*, MAX5522/MAX5524 enter shutdown. For the MAX5523/MAX5525, D9 and D8 configure the internal reference voltage (Table 3).                                                                                                                        |
| 1            | 1  | 0  | 1  | D9, D8, XXXXXXXX | 00        | MAX5522–MAX5525 enter normal operation; DAC outputs reflect existing contents of DAC registers. For the MAX5523/MAX5525, D9 and D8 configure the internal reference voltage (Table 3).                                                                                        |
| 1            | 1  | 1  | 0  | D9, D8, XXXXXXXX | 00        | MAX5522–MAX5525 enter shutdown; DAC outputs set to high impedance. For the MAX5523/MAX5525, D9 and D8 configure the internal reference voltage (Table 3).                                                                                                                     |
| 1            | 1  | 1  | 1  | 10-bit data      | 00        | Load input registers A and B and DAC registers A and B from shift register; DAC outputs A and B updated; MAX5523/MAX5525 enter normal operation if in standby or shutdown; MAX5522/MAX5524 enter normal operation if in shutdown.                                             |

X = Don't care.

\*Standby mode can be entered from normal operation only. It is not possible to enter standby mode from shutdown.

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Power Modes

The MAX5522-MAX5525 feature two power modes to conserve power during idle periods. In normal operation, the device is fully operational. In shutdown mode, the device is completely powered down, including the internal voltage reference in the MAX5523/MAX5525. The MAX5523/MAX5525 also offer a standby mode in which all circuitry is powered down except the internal voltage reference. Standby mode keeps the reference powered up while the remaining circuitry is shut down, allowing it to be used as a system reference. It also helps reduce the wake-up delay by not requiring the reference to power up when returning to normal operation.

## Shutdown Mode

The MAX5522-MAX5525 feature a software-programmable shutdown mode that reduces the supply current and the interface input-current to 0.18μA (max). Writing an input control word with control bits C[3:0] = 1110 (Table 2) places the device in shutdown mode. In shutdown, the MAX5522/MAX5524 reference input and DAC output buffers go high impedance. Placing the MAX5523/MAX5525 into shutdown turns off the internal reference and the DAC output buffers go high impedance. The serial interface still remains active for all devices.

Table 2 shows several commands that bring the MAX5522-MAX5525 back to normal operation. The power-up time from shutdown is required before the DAC outputs are valid.

**Note:** For the MAX5523/MAX5525, standby mode cannot be entered directly from shutdown mode. The device must be brought into normal operation first before entering standby mode.

## Standby Mode (MAX5523/MAX5525 Only)

The MAX5523/MAX5525 feature a software-programmable standby mode that reduces the typical supply current to 3μA (max). Standby mode powers down all circuitry except the internal voltage reference. Place the device in standby mode by writing an input control word with control bits C[3:0] = 1100 (Table 2). The internal reference and serial interface remain active while the DAC output buffers go high impedance.

For the MAX5523/MAX5525, standby mode cannot be entered directly from shutdown mode. The device must be brought into normal operation first before entering standby mode. To enter standby from shutdown, issue the command to return to normal operation followed immediately by the command to go into standby.

Table 2 shows several commands that bring the MAX5523/MAX5525 back to normal operation. When transitioning from standby mode to normal operation, only the DAC power-up time is required before the DAC outputs are valid.

## Reference Input

The MAX5522/MAX5524 accept a reference with a voltage range extending from 0 to V<sub>DD</sub>. The output voltage (V<sub>OUT</sub>) is represented by a digitally programmable voltage source as:

$$V_{OUT} = (V_{REF} \times N / 256) \times \text{gain}$$

where N is the numeric value of the DAC's binary input code (0 to 1023), V<sub>REF</sub> is the reference voltage, gain is the externally set voltage gain for the MAX5524, and gain is one for the MAX5522.

In shutdown mode, the reference input enters a high-impedance state with an input impedance of 2.5GΩ (typ).

## Reference Output

The MAX5523/MAX5525 internal voltage reference is software configurable to one of four voltages. Upon power-up, the default reference voltage is 1.214V. Configure the reference voltage using D8 and D9 data bits (Table 3) when the control bits are as follows C[3:0] = 1100, 1101, or 1110 (Table 2). V<sub>DD</sub> must be kept at a minimum of 200mV above V<sub>REF</sub> for proper operation.

**Table 3. Reference Output Voltage Programming**

| D9 | D8 | REFERENCE VOLTAGE (V) |
|----|----|-----------------------|
| 0  | 0  | 1.214                 |
| 0  | 1  | 1.940                 |
| 1  | 0  | 2.425                 |
| 1  | 1  | 3.885                 |

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Applications Information

### 1-Cell and 2-Cell Circuits

See Figure 3 for an illustration of how to power the MAX5522-MAX5525 with either one lithium-ion battery or two alkaline batteries. The low current consumption of the devices make the MAX5522-MAX5525 ideal for battery-powered applications.

### Programmable Current Source

See the circuit in Figure 4 for an illustration of how to configure the MAX5524/MAX5525 as a programmable current source for driving an LED. The MAX5524/MAX5525 drive a standard NPN transistor to program the current source. The current source ( $I_{LED}$ ) is defined in the equation in Figure 4.

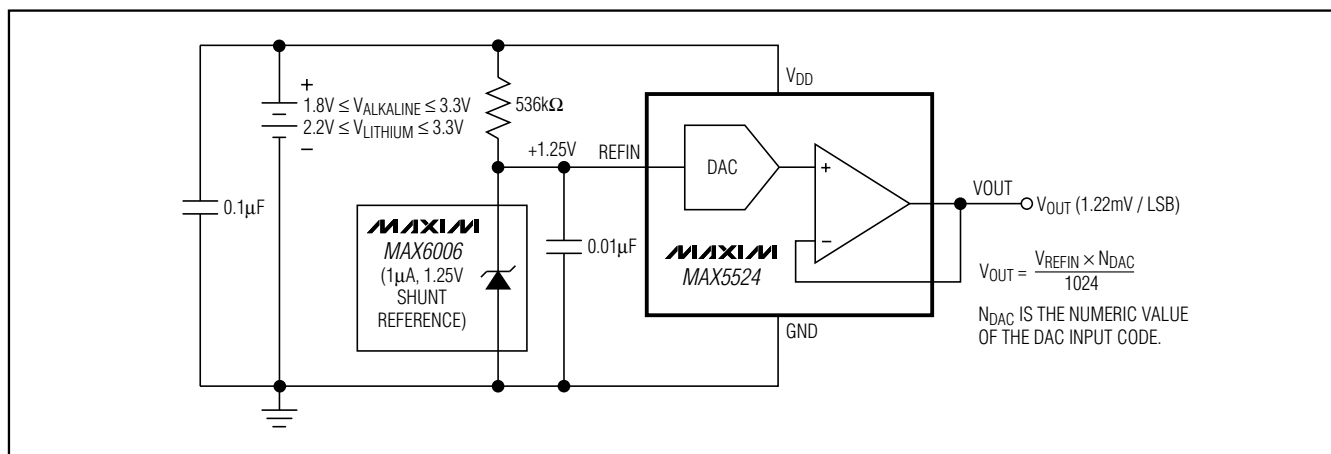


Figure 3. Portable Application Using Two Alkaline Cells or One Lithium Coin Cell

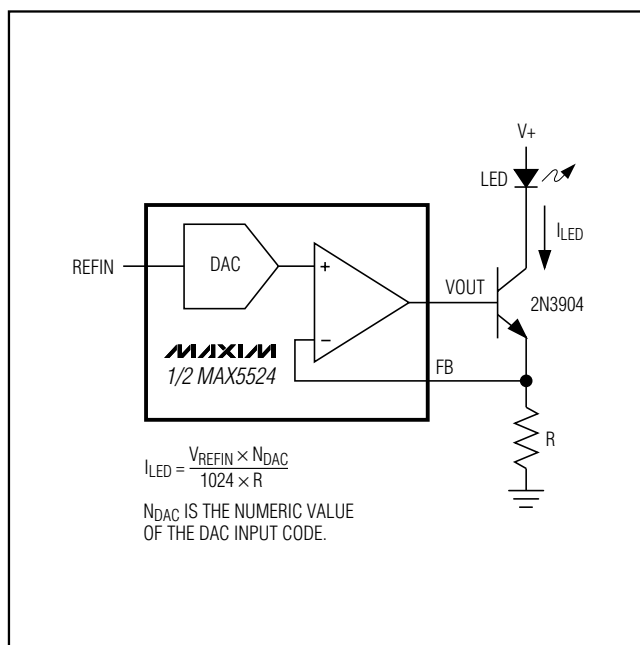


Figure 4. Programmable Current Source Driving an LED

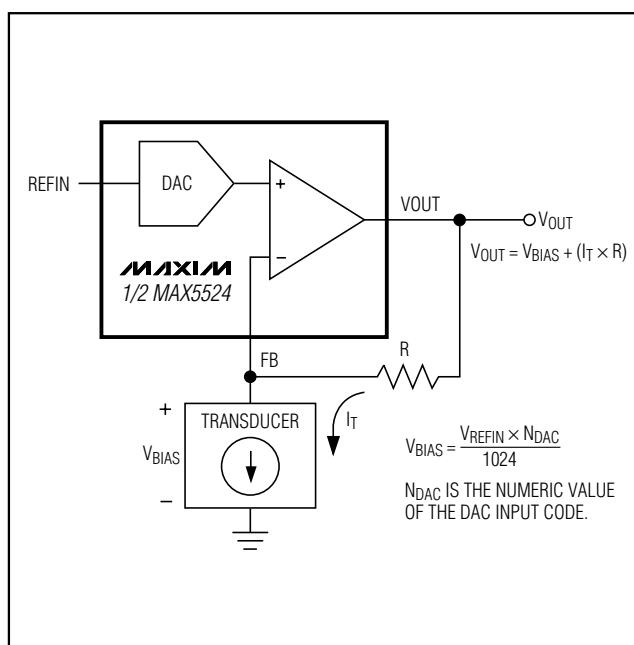


Figure 5. Transimpedance Configuration for a Voltage-Biased Current-Output Transducer

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Voltage Biasing a Current-Output Transducer

See the circuit in Figure 5 for an illustration of how to configure the MAX5524/MAX5525 to bias a current-output transducer. In Figure 5, the output voltage of the MAX5524/MAX5525 is a function of the voltage drop across the transducer added to the voltage drop across the feedback resistor R.

## Unipolar Output

Figure 6 shows the MAX5524 in a unipolar output configuration with unity gain. Table 4 lists the unipolar output codes.

## Bipolar Output

The MAX5524 output can be configured for bipolar operation as shown in Figure 7. The output voltage is given by the following equation:

$$V_{OUT\_} = V_{REFIN} \times [(N_A - 512) / 512]$$

where  $N_A$  represents the decimal value of the DAC's binary input code. Table 5 shows the digital codes (offset binary) and the corresponding output voltage for the circuit in Figure 7.

## Configurable Output Gain

The MAX5524/MAX5525 have force-sense outputs, which provide a connection directly to the inverting terminal of the output op amp, yielding the most flexibility. The advantage of the force-sense output is that specific gains can be set externally for a given application. The gain error for the MAX5524/MAX5525 is specified in a unity-gain configuration (op-amp output and inverting terminals connected), and additional gain error results from external resistor tolerances. Another advantage of the force-sense DAC is that it allows many useful circuits to be created with only a few simple external components.

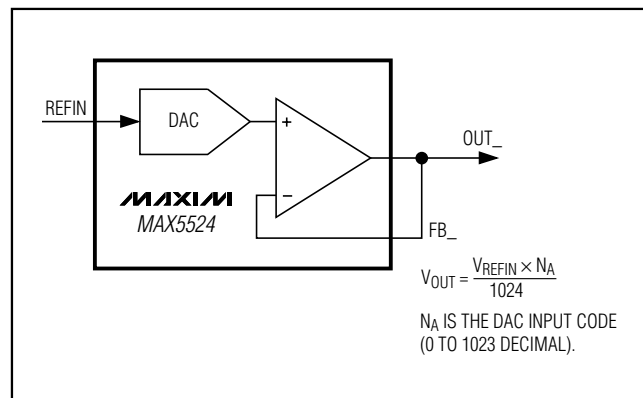


Figure 6. Unipolar Output Circuit

An example of a custom fixed gain using the MAX5524/MAX5525 force-sense output is shown in Figure 8. In this example, R1 and R2 set the gain for  $V_{OUTA}$ .

$$V_{OUTA} = [(V_{REFIN} \times N_A) / 1024] \times [1 + (R2 / R1)]$$

where  $N_A$  represents the numeric value of the DAC input code.

## Self-Biased Two-Electrode Potentiostat Application

See the circuit in Figure 10 for an illustration of how to use the MAX5525 to bias a two-electrode potentiostat on the input of an ADC.

## Power Supply and Bypassing Considerations

Bypass the power supply with a 4.7 $\mu$ F capacitor in parallel with a 0.1 $\mu$ F capacitor to GND. Minimize lengths to reduce lead inductance. If noise becomes an issue, use shielding and/or ferrite beads to increase isolation. For the thin QFN package, connect the exposed pad to ground.

Table 4. Unipolar Code Table (Gain = +1)

| DAC CONTENTS |      |      | ANALOG OUTPUT              |
|--------------|------|------|----------------------------|
| MSB          |      | LSB  |                            |
| 1111         | 1111 | 1100 | +VREF (1023/1024)          |
| 1000         | 0000 | 0100 | +VREF (513/1024)           |
| 1000         | 0000 | 0000 | +VREF (512/1024) = +VREF/2 |
| 0111         | 1111 | 1100 | +VREF (511/1024)           |
| 0000         | 0000 | 0100 | +VREF (1/1024)             |
| 0000         | 0000 | 0000 | 0V                         |

Table 5. Bipolar Code Table (Gain = +1)

| DAC CONTENTS |      |      | ANALOG OUTPUT                                   |
|--------------|------|------|-------------------------------------------------|
| MSB          |      | LSB  |                                                 |
| 1111         | 1111 | 1100 | +V <sub>REF</sub> (511/512)                     |
| 1000         | 0000 | 0100 | +V <sub>REF</sub> (1/512)                       |
| 1000         | 0000 | 0000 | 0V                                              |
| 0111         | 1111 | 1100 | -V <sub>REF</sub> (1/512)                       |
| 0000         | 0000 | 0100 | -V <sub>REF</sub> (511/512)                     |
| 0000         | 0000 | 0000 | -V <sub>REF</sub> (512/512) = -V <sub>REF</sub> |

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Layout Considerations

Digital and AC transient signals coupling to GND can create noise at the output. Use proper grounding techniques, such as a multilayer board with a low-inductance ground plane. Wire-wrapped boards and sockets are not recommended. For optimum system performance, use printed circuit (PC) boards. Good PC board ground layout minimizes crosstalk between DAC outputs, reference inputs, and digital inputs. Reduce crosstalk by keeping analog lines away from digital lines.

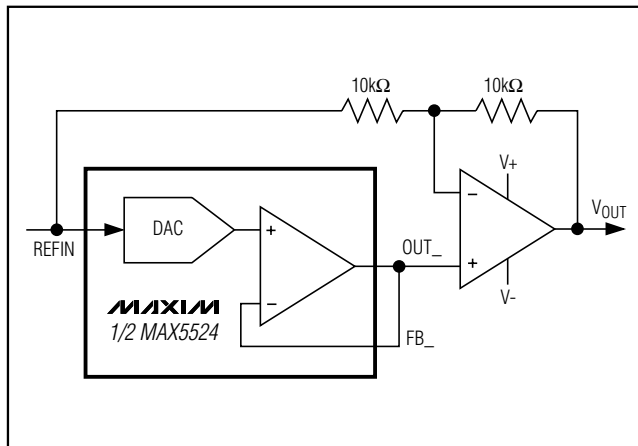


Figure 7. Bipolar Output Circuit

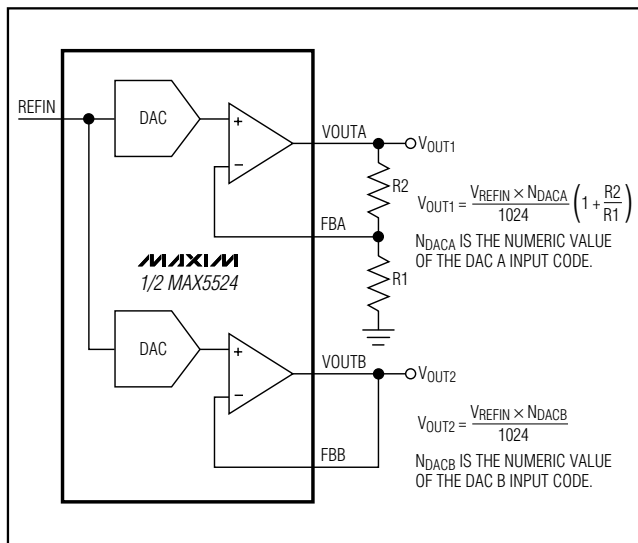


Figure 8. Separate Force-Sense Outputs Create Unity and Greater-than-Unity DAC Gains Using the Same Reference

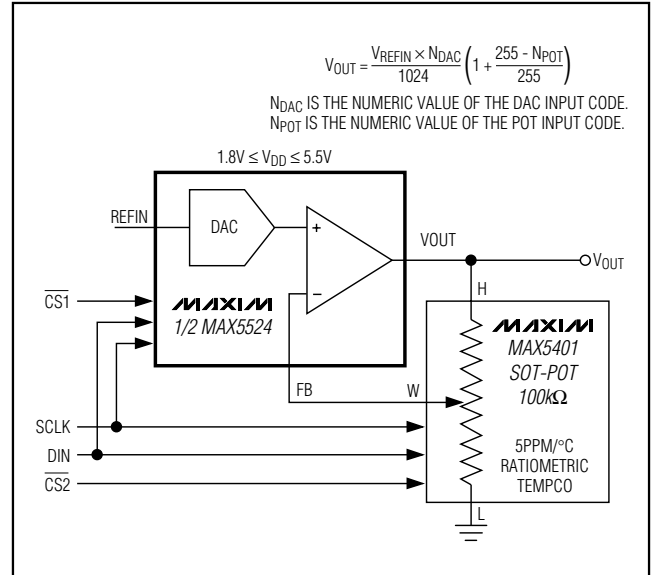


Figure 9. Software-Configurable Output Gain

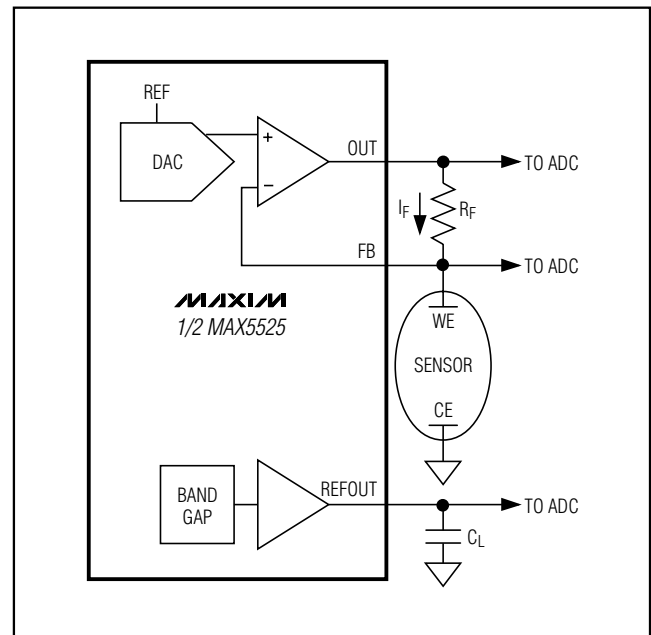


Figure 10. Self-Biased Two-Electrode Potentiostat Application

MAX5522-MAX5525

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs


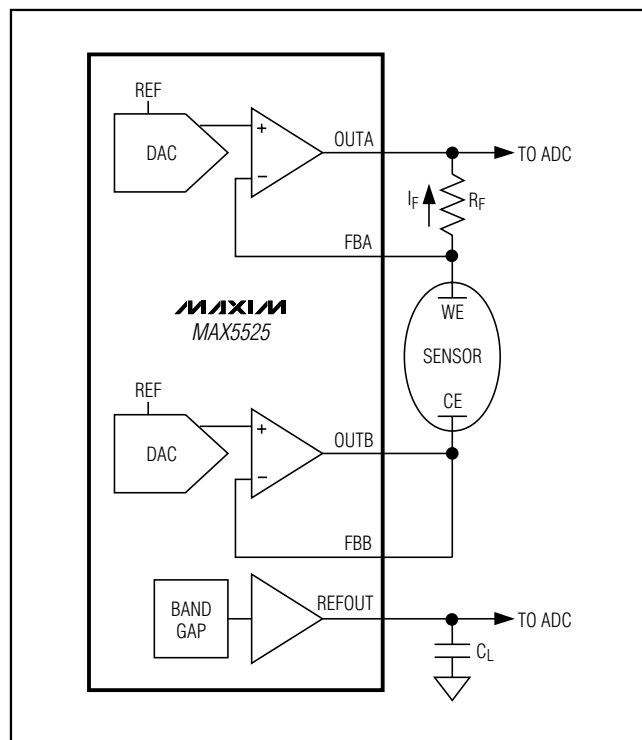


Figure 11. Driven Two-Electrode Potentiostat Application

## Pin Configurations (continued)

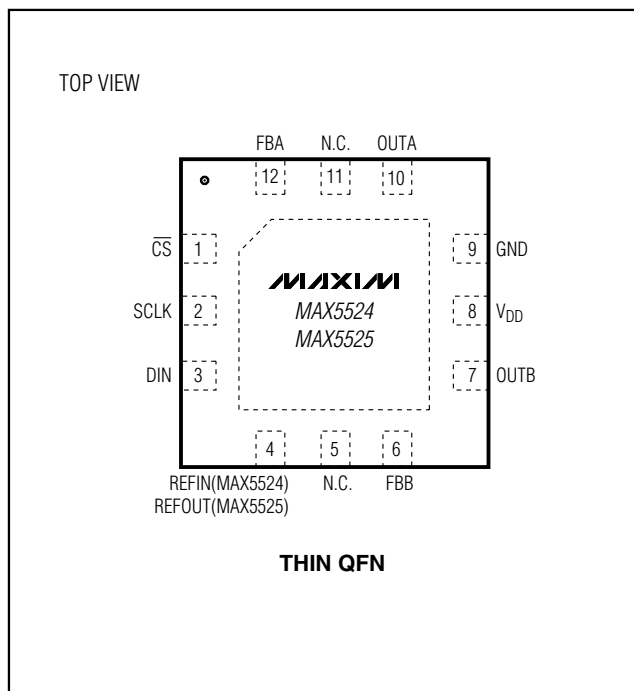

## Chip Information

TRANSISTOR COUNT: 10,688

PROCESS: BiCMOS





# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

MAX5522-MAX5525

24L QFN THIN:EPS

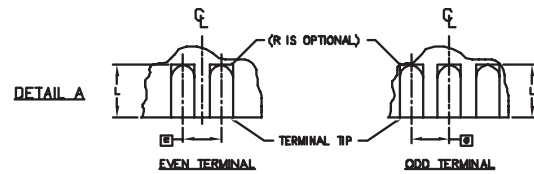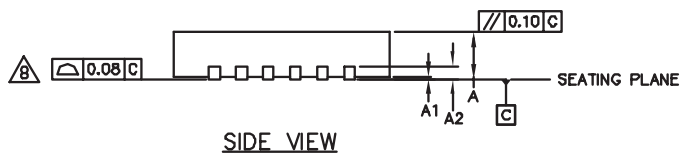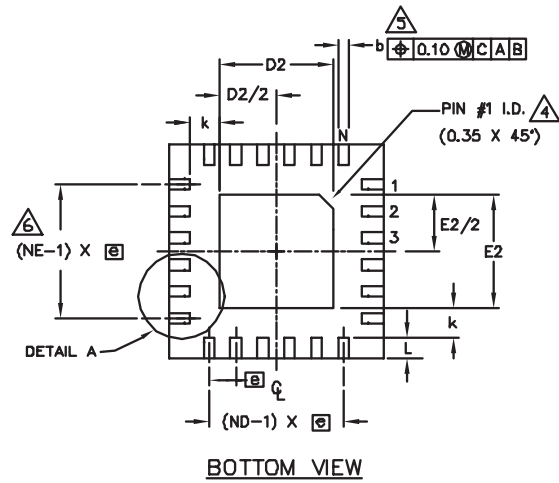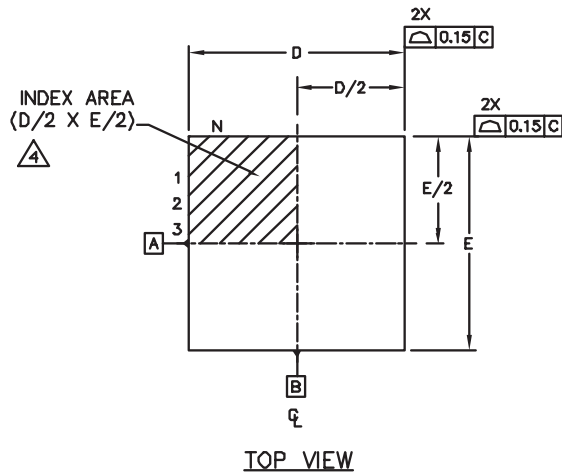

|                                                    |                                                |                          |                                     |
|----------------------------------------------------|------------------------------------------------|--------------------------|-------------------------------------|
| <b>DALLAS SEMICONDUCTOR</b> <b>MAXIM</b>           |                                                |                          |                                     |
| <small>PROPRIETARY INFORMATION</small>             |                                                |                          |                                     |
| <small>TITLE: PACKAGE OUTLINE</small>              |                                                |                          |                                     |
| <small>12, 16, 20, 24L THIN QFN, 4x4x0.8mm</small> |                                                |                          |                                     |
| <small>APPROVAL</small>                            | <small>DOCUMENT CONTROL NO.</small><br>21-0139 | <small>REV.</small><br>C | <small>1</small> / <small>2</small> |

# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

| COMMON DIMENSIONS |           |      |      |           |      |      |           |      |      |           |      |      |
|-------------------|-----------|------|------|-----------|------|------|-----------|------|------|-----------|------|------|
| PKG               | 12L 4x4   |      |      | 16L 4x4   |      |      | 20L 4x4   |      |      | 24L 4x4   |      |      |
| REF.              | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. |
| A                 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 |
| A1                | 0.0       | 0.02 | 0.05 | 0.0       | 0.02 | 0.05 | 0.0       | 0.02 | 0.05 | 0.0       | 0.02 | 0.05 |
| A2                | 0.20 REF  |      |      | 0.20 REF  |      |      | 0.20 REF  |      |      | 0.20 REF  |      |      |
| b                 | 0.25      | 0.30 | 0.35 | 0.25      | 0.30 | 0.35 | 0.20      | 0.25 | 0.30 | 0.18      | 0.23 | 0.30 |
| D                 | 3.90      | 4.00 | 4.10 | 3.90      | 4.00 | 4.10 | 3.90      | 4.00 | 4.10 | 3.90      | 4.00 | 4.10 |
| E                 | 3.90      | 4.00 | 4.10 | 3.90      | 4.00 | 4.10 | 3.90      | 4.00 | 4.10 | 3.90      | 4.00 | 4.10 |
| e                 | 0.80 BSC. |      |      | 0.65 BSC. |      |      | 0.50 BSC. |      |      | 0.50 BSC. |      |      |
| k                 | 0.25      | -    | -    | 0.25      | -    | -    | 0.25      | -    | -    | 0.25      | -    | -    |
| L                 | 0.45      | 0.55 | 0.65 | 0.45      | 0.55 | 0.65 | 0.45      | 0.55 | 0.65 | 0.30      | 0.40 | 0.50 |
| N                 | 12        |      |      | 16        |      |      | 20        |      |      | 24        |      |      |
| ND                | 3         |      |      | 4         |      |      | 5         |      |      | 6         |      |      |
| NE                | 3         |      |      | 4         |      |      | 5         |      |      | 6         |      |      |
| JeDEC             | WGGB      |      |      | WGGC      |      |      | WGGD-1    |      |      | WGGD-2    |      |      |

| EXPOSED PAD VARIATIONS |      |      |      |      |      |      |                          |
|------------------------|------|------|------|------|------|------|--------------------------|
| PKG.<br>CODES          | D2   |      |      | E2   |      |      | DOWN<br>BONDS<br>ALLOWED |
|                        | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |                          |
| T1244-2                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | NO                       |
| T1244-3                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | YES                      |
| T1244-4                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | NO                       |
| T1644-2                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | NO                       |
| T1644-3                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | YES                      |
| T1644-4                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | NO                       |
| T2044-1                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | NO                       |
| T2044-2                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | YES                      |
| T2044-3                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | NO                       |
| T2444-1                | 2.45 | 2.60 | 2.63 | 2.45 | 2.60 | 2.63 | NO                       |
| T2444-2                | 1.95 | 2.10 | 2.25 | 1.95 | 2.10 | 2.25 | YES                      |
| T2444-3                | 2.45 | 2.60 | 2.63 | 2.45 | 2.60 | 2.63 | YES                      |
| T2444-4                | 2.45 | 2.60 | 2.63 | 2.45 | 2.60 | 2.63 | NO                       |

### NOTES:

1. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
3. N IS THE TOTAL NUMBER OF TERMINALS.
4. THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JEDEC 95-1 SPP-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
5. DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 mm AND 0.30 mm FROM TERMINAL TIP.
6. ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
7. DEPOPULATION IS POSSIBLE IN A SYMMETRICAL FASHION.
8. COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
9. DRAWING CONFORMS TO JEDEC MO220, EXCEPT FOR T2444-1, T2444-3 AND T2444-4.

|                                                                                       |                                 |
|---------------------------------------------------------------------------------------|---------------------------------|
|  |                                 |
| PROPRIETARY INFORMATION                                                               |                                 |
| TITLE: PACKAGE OUTLINE<br>12, 16, 20, 24L THIN QFN, 4x4x0.8mm                         |                                 |
| APPROVAL                                                                              | DOCUMENT CONTROL NO.<br>21-0139 |
| REV.<br>C                                                                             | 2/2                             |



# Dual, Ultra-Low-Power, 10-Bit, Voltage-Output DACs

## Package Information (continued)



(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

MAX5522-MAX5525

8LUMAXD.EPS

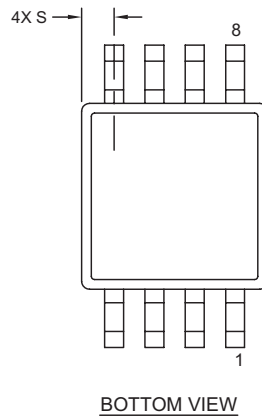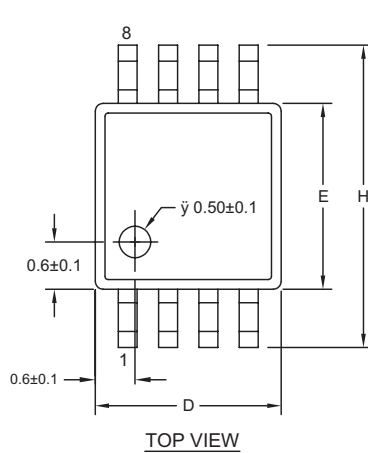

| DIM | INCHES     |       | MILLIMETERS |      |
|-----|------------|-------|-------------|------|
|     | MIN        | MAX   | MIN         | MAX  |
| A   | -          | 0.043 | -           | 1.10 |
| A1  | 0.002      | 0.006 | 0.05        | 0.15 |
| A2  | 0.030      | 0.037 | 0.75        | 0.95 |
| b   | 0.010      | 0.014 | 0.25        | 0.36 |
| c   | 0.005      | 0.007 | 0.13        | 0.18 |
| D   | 0.116      | 0.120 | 2.95        | 3.05 |
| e   | 0.0256 BSC |       | 0.65 BSC    |      |
| E   | 0.116      | 0.120 | 2.95        | 3.05 |
| H   | 0.188      | 0.198 | 4.78        | 5.03 |
| L   | 0.016      | 0.026 | 0.41        | 0.66 |
| α   | 0°         | 6°    | 0°          | 6°   |
| S   | 0.0207 BSC |       | 0.5250 BSC  |      |

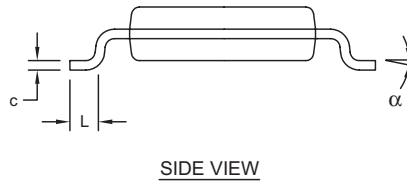

### NOTES:

1. D & E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15MM (.006").
3. CONTROLLING DIMENSION: MILLIMETERS.
4. MEETS JEDEC MO-187C-AA.

|                                                                                                                      |                      |                                                                                       |       |
|----------------------------------------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------|-------|
|  <b>DALLAS</b><br>SEMICONDUCTOR |                      |  |       |
| PROPRIETARY INFORMATION                                                                                              |                      |                                                                                       |       |
| TITLE:                                                                                                               |                      |                                                                                       |       |
| PACKAGE OUTLINE, 8L uMAX/uSOP                                                                                        |                      |                                                                                       |       |
| APPROVAL                                                                                                             | DOCUMENT CONTROL NO. | REV.                                                                                  | 1 / 1 |
|                                                                                                                      | 21-0036              | J                                                                                     |       |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 23