



MBR20...CT
MBRB20...CT
MBR20...CT-1

SCHOTTKY RECTIFIER

20 Amp


Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	20	A
I_{FRM} @ $T_C = 133^{\circ}C$ (Per Leg)	20	A
V_{RRM}	80/90/100	V
I_{FSM} @ tp = 5 μs sine	850	A
V_F @ 10 Apk, $T_J = 125^{\circ}C$	0.70	V
T_J range	-65 to 150	$^{\circ}C$

Description/ Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C T_J operation
- Center tap TO-220, D²Pak and TO-262 packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles		
MBR20...CT  TO-220	MBRB20...CT  D²PAK	MBR20...CT-1  TO-262

Voltage Ratings

Parameters	MBR2080CT MBRB2080CT MBR2080CT-1	MBR2090CT MBRB2090CT MBR2090CT-1	MBR20100CT MBRB20100CT MBR20100CT-1
V_R Max. DC Reverse Voltage (V)	80	90	100
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg) (Per Device)	10 20	A	@ $T_C = 133^\circ\text{C}$, (Rated V_R)
I_{FRM} Peak Repetitive Forward Current (Per Leg)	20	A	Rated V_R , squarewave, 20kHz $T_C = 133^\circ\text{C}$
I_{FSM} Non Repetitive Peak Surge Current	850 150	A	5 μs Sine or 3 μs Rect. pulse Following any rated load condition and with rated V_{RRM} applied Surge applied at rated load conditions halfwave, single phase, 60Hz
I_{RRM} Peak Repetitive Reverse Surge Current	0.5	A	2.0 μsec 1.0 KHz
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	24	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 2$ Amps, $L = 12$ mH

Electrical Specifications

Parameters	Values	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1)	0.80 0.95 0.70 0.85	V	@ 10A @ 20A @ 10A @ 20A
I_{RM} Max. Instantaneous Reverse Current (1)	0.10 6	mA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
$V_{F(TO)}$ Threshold Voltage	0.433	V	$T_J = T_J$ max.
r_t Forward Slope Resistance	15.8	m Ω	
C_T Max. Junction Capacitance	400	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change (Rated V_R)	10,000	V/ μs	

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T_J Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-65 to 175	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	2.0	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased Only for TO-220
R_{thJA} Max. Thermal Resistance Junction to Ambient	50	$^\circ\text{C/W}$	DC operation For D ² Pak and TO-262
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min. 6 (5) Max. 12 (10)	Kg-cm (lbf-in)	Non-lubricated threads

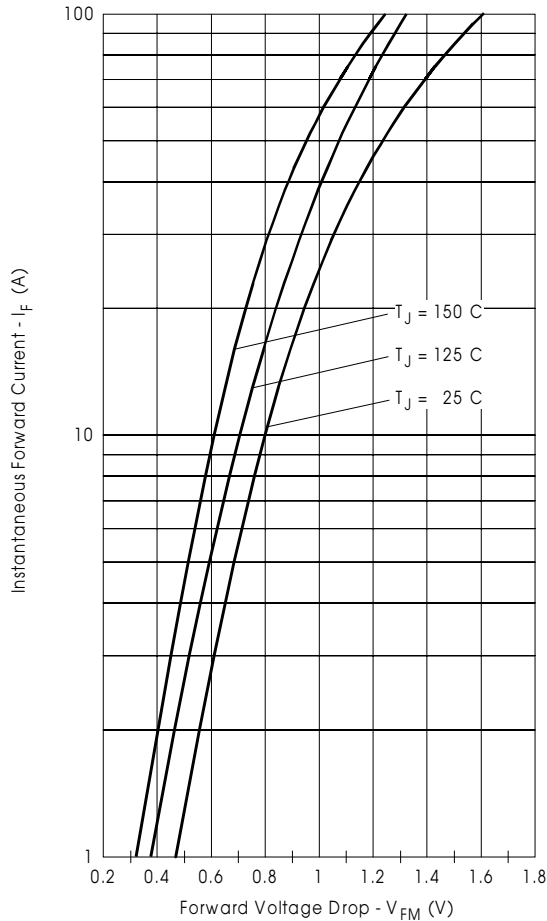


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

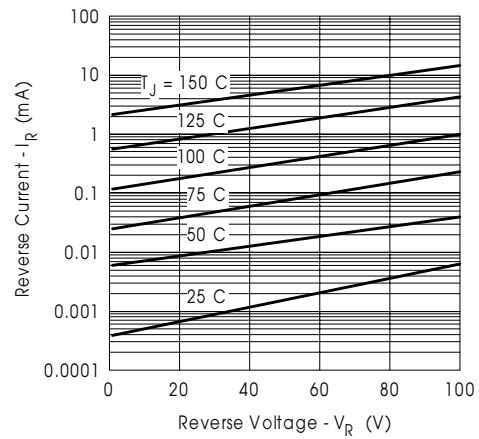


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

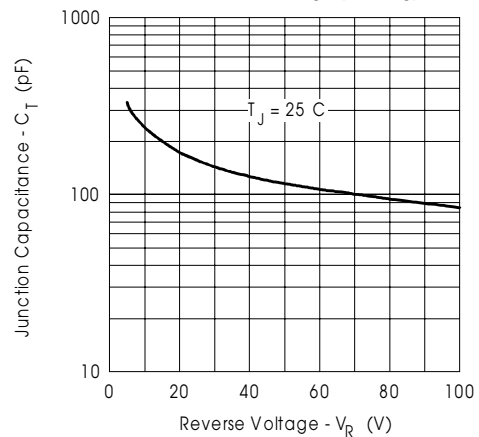


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

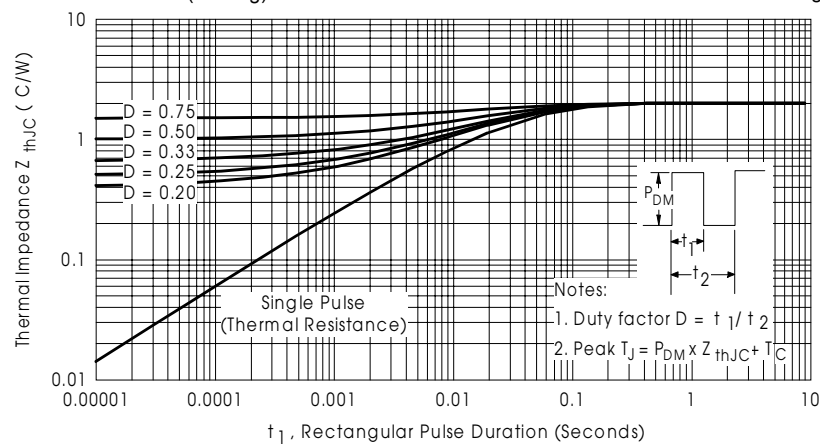


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

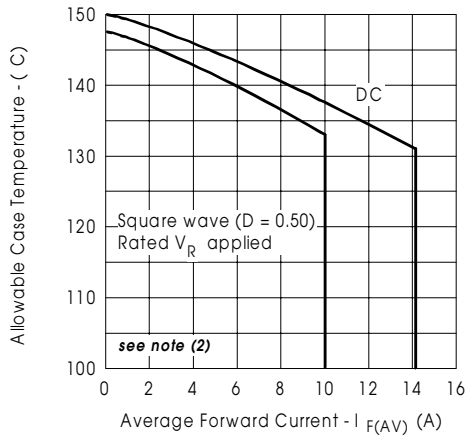


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

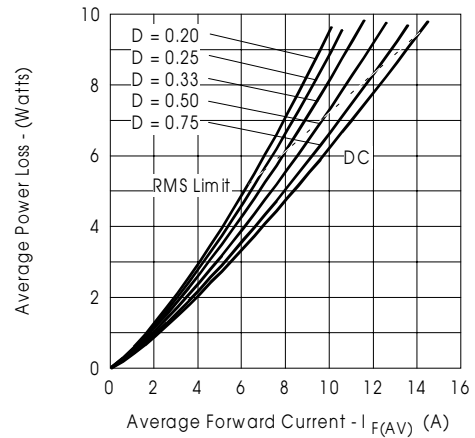


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

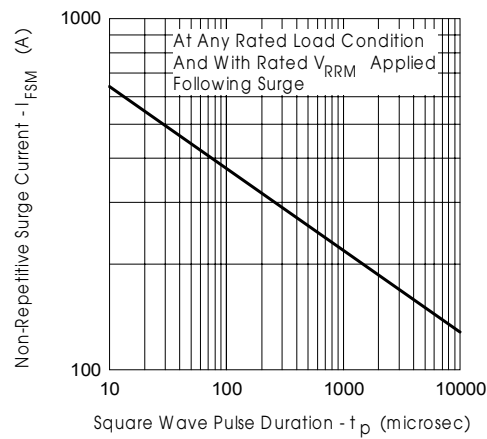




Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = rated V_R


Outline Table

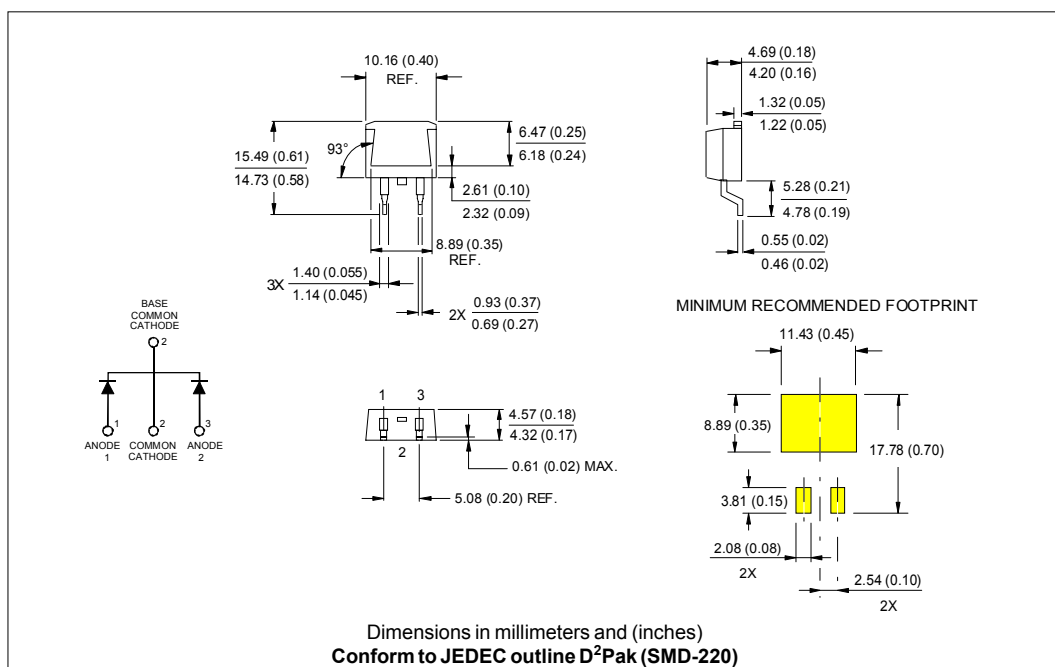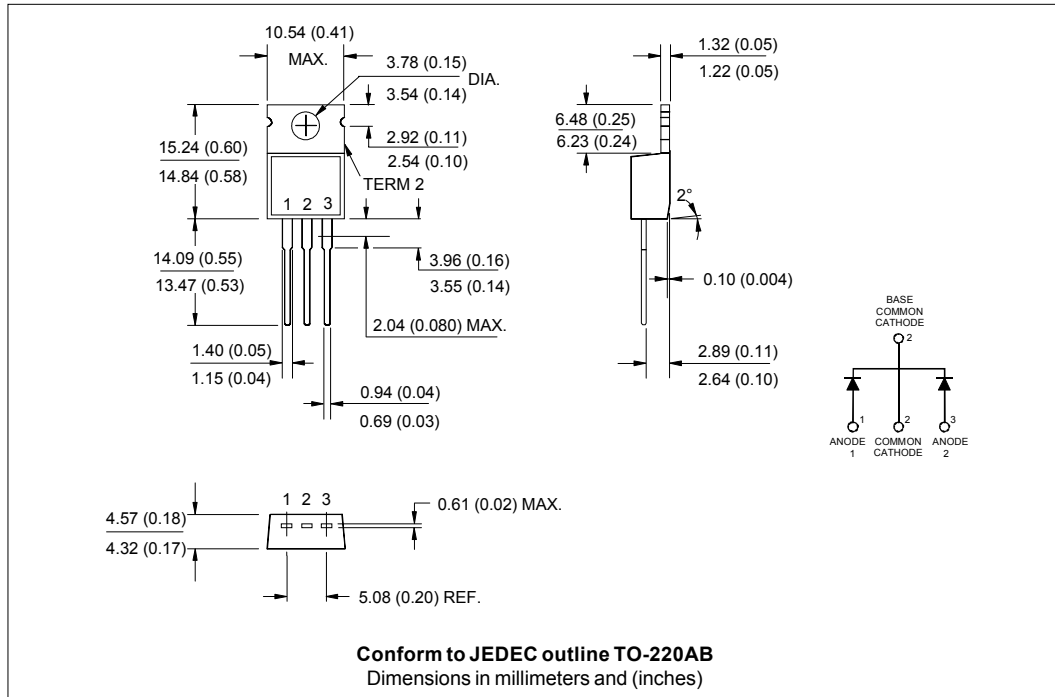


MBR20...CT, MBRB20...CT, MBR20...CT-1

Bulletin PD-2.321 rev. I 08/02

International
IRF Rectifier

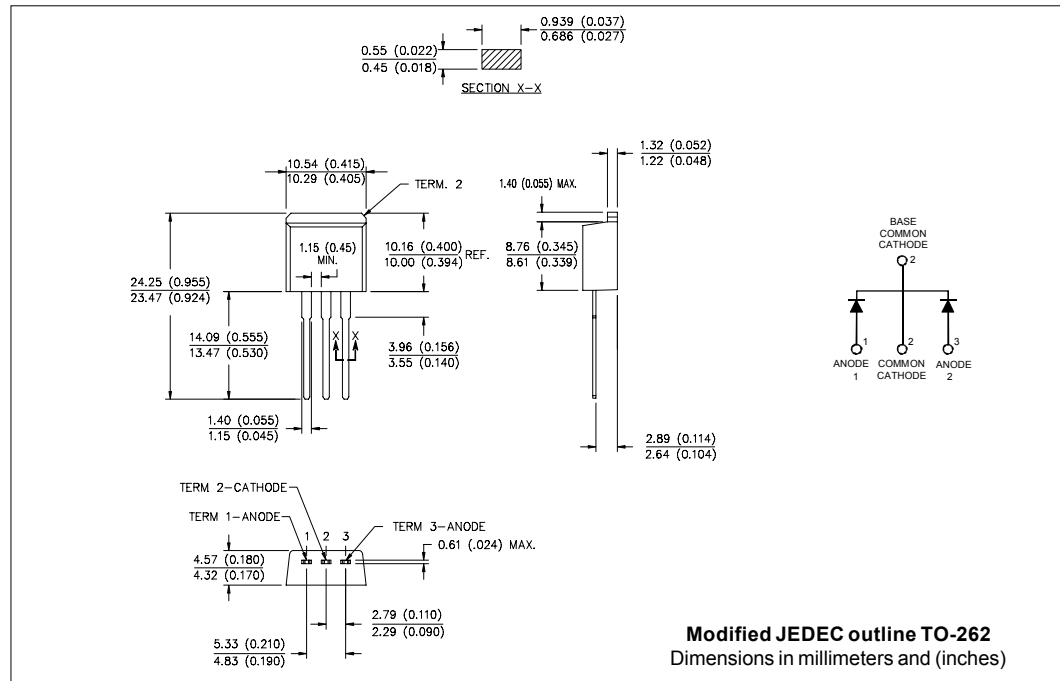


Tape & Reel Information

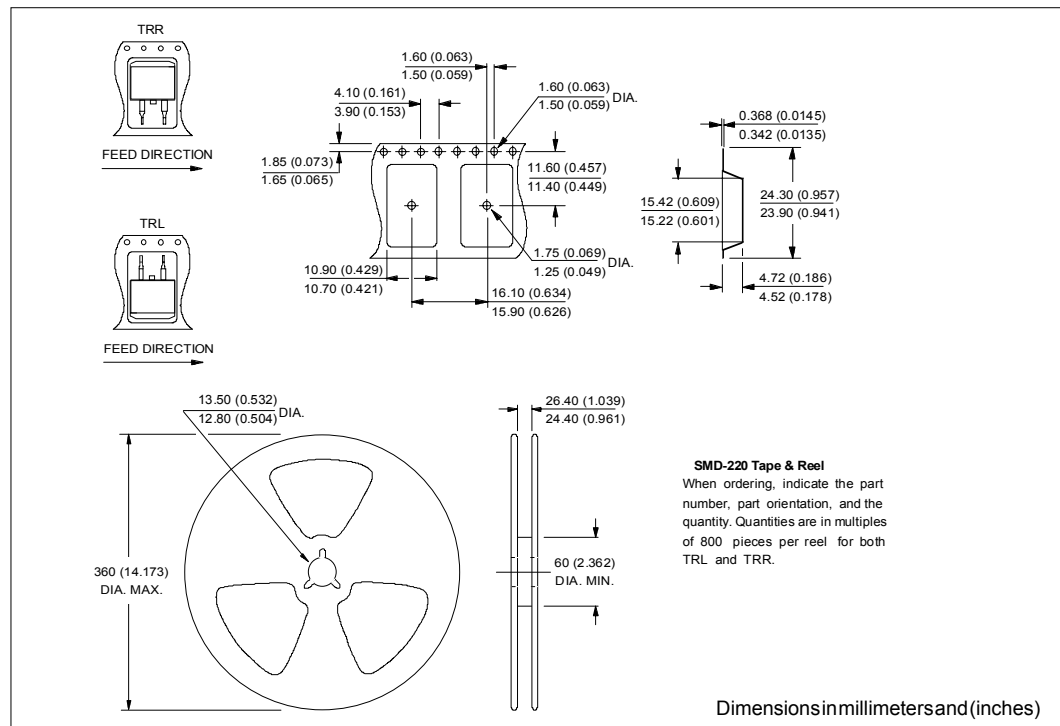

Marking Information

EXAMPLE: THIS IS AN MBRB20100CT

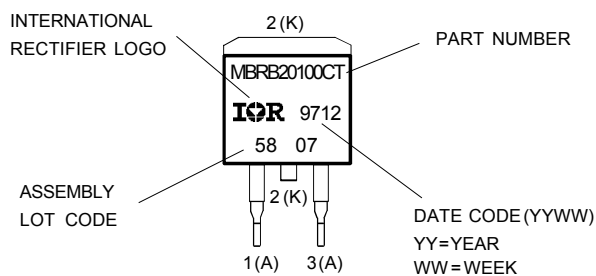

Ordering Information Table

Device Code					
	MBR	B	20	100	CT -1
	①	②	③	④	⑤ ⑥
1	- Essential Part Number				
2	- B = Surface Mount None = TO-220				
3	- Current Rating				
4	- Voltage code: Code = V_{RRM}				
5	- CT = Essential Part Number				
6	- -1 = TO-262 None = TO-220				

080 = 80V
090 = 90V
100 = 100V

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.