

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
  - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
  - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
  - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

## MULTIMEDIA PROCESSOR FOR MOBILE APPLICATIONS

### DESCRIPTION

EMMA Mobile1-D512 (EM1-D512) (SIP: MC-10118B) is a multimedia processor for mobile applications that integrates a logic chip incorporating a CPU and DSP, and a Mobile DDR SDRAM chip, in one package.

As multimedia processor functions, EM1-D512 incorporates one CPU (ARM1176JZF-S™) and one DSP (SPXK701), achieving high-speed, power-efficient application processing. EM1-D512 also incorporates image processors with various functions to accelerate image processing.

Various power save modes enable the power to be controlled according to application processing. Moreover, power consumption can be reduced during standby by using sequences independent from the system.

### FEATURES

- CPU: ARM1176JZF-S (Max. 500 MHz, I-cache: 32 KB, D-cache: 32 KB)
- DSP: SPXK701 (Max. 500 MHz, I-cache: 32 KB, D-cache: 32 KB)
- Mobile DDR SDRAM (512Mb)
- DMA controller: Memory ↔ memory and memory ↔ peripheral interface
- Timers: General-purpose timers, watchdog timer (WDT)
- Image processing
  - Image processor (resizing, filtering, etc.)
  - Image rotator (0°, 90°, 180°, 270°)
  - Graphics DMA (ROP and FILL)
  - Image composer (LCD output image synthesis)
- H.264/MPEG-4 AVC accelerator application performance
  - H.264/MPEG-4 AVC Encode/Decode: D1 30 fps
- Peripheral interfaces
  - Memory interface: External bus interface (16 bits: Flash memory, etc.), NAND interface
  - Serial interfaces: UART, I2C, audio/voice, SPI, IrDA
  - SD card interface
  - Image-related interfaces: LCD interface, terrestrial digital TV interface (DTV), ITU-R.BT656 interface (NTS), camera interface
  - General-purpose I/O interface
  - USB interface
- Power supply voltage
  - Core power supply : V (1.2 V system : 1.1V - 1.3V)
  - IO power supply : VIO18 (1.8 V system : 1.7V - 1.9V), VIO3 (3 V system : 2.7V - 3.6V)

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.

**Order Information**

| Order name        | Package                         |
|-------------------|---------------------------------|
| MC-10118BF1-ENY-A | 481-pin FPBGA (12.7mm × 12.7mm) |

## RELATED DOCUMENTS


The functions of the multimedia processor for mobile applications are described in the following documents. Refer to these documents together with this data sheet during design operations.

The related documents indicated in this publication may include preliminary versions. However, preliminary versions are not marked as such.

- Multimedia Processor for Mobile Applications User's Manual
  - Audio/Voice and PWM Interfaces (R19UH0027EJ)
  - DDR SDRAM Interface (R19UH0028EJ)
  - DMA Controller (S19255E)
  - I2C Interface (S19256E)
  - ITU-R BT.656 Interface (S19257E)
  - LCD Controller (S19258E)
  - MICROWIRE (S19259E)
  - NAND Flash Interface (S19260E)
  - SPI (S19261E)
  - UART Interface (S19262E)
  - Image Composer (S19263E)
  - Image Processor Unit (S19264E)
  - System Control/General-Purpose I/O Interface (R19UH0029EJ)
  - Timer (S19266E)
  - Terrestrial Digital TV Interface (S19267E)
  - Camera Interface (S19285E)
  - USB Interface (S19359E)
  - SD Memory Card Interface (S19361E)
  - PDMA (S19373E)
  - One Chip (R19UH0030EJ)


**Caution** The related documents listed above are subject to change without notice. Be sure to use the latest version of each document when designing.

BLOCK DIAGRAM

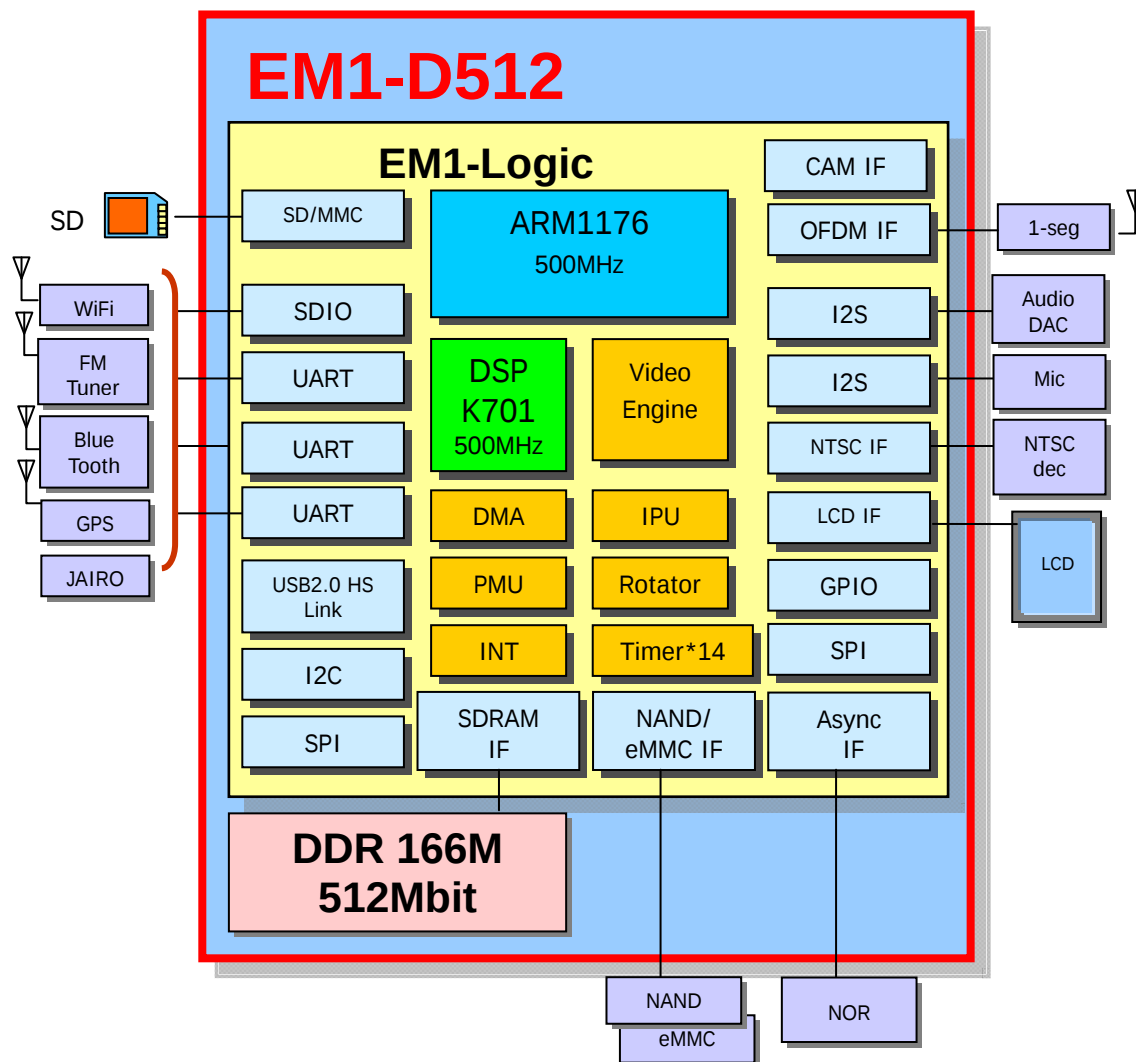

PIN LAYOUT

481-pin fine-pitch BGA package (12.7 × 12.7 mm)

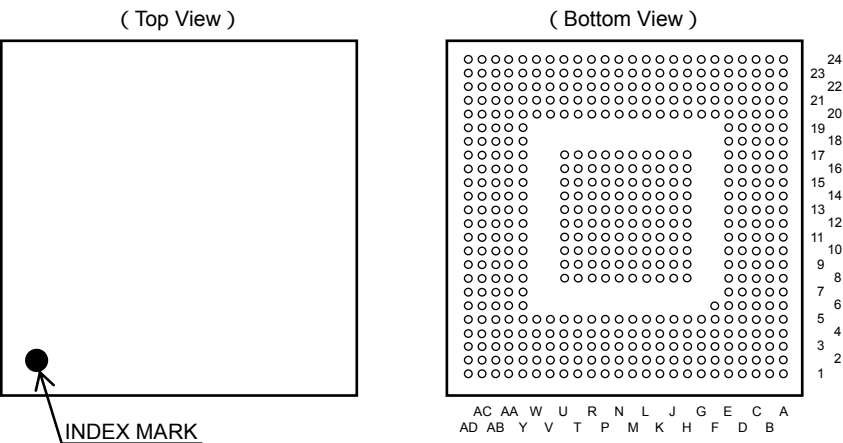

**Pin Assignment**

(1/5)

| Pin No. | Type | Pin Name   |
|---------|------|------------|
| A1      | -    | G          |
| A2      | -    | G          |
| A3      | -    | G          |
| A4      | D    | PWM0       |
| A5      | D    | URT0_SRIN  |
| A6      | -    | G          |
| A7      | -    | V          |
| A8      | C    | PM0_CLK    |
| A9      | B    | C32K       |
| A10     | -    | VA2        |
| A11     | -    | G          |
| A12     | -    | VA3        |
| A13     | -    | V          |
| A14     | -    | VIO3       |
| A15     | -    | G          |
| A16     | D    | REFCLKO    |
| A17     | Z    | OSC12M_CKO |
| A18     | Z    | OSC12M_CK1 |
| A19     | -    | G          |
| A20     | -    | V          |
| A21     | -    | VIO18      |
| A22     | -    | G          |
| A23     | -    | G          |
| A24     | -    | G          |
| B1      | -    | G          |
| B2      | -    | G          |
| B3      | D    | URT2_SOUT  |
| B4      | D    | PWM1       |
| B5      | D    | URT0_SOUT  |
| B6      | —    | G          |
| B7      | —    | V          |
| B8      | D    | SP0_CLK    |
| B9      | C    | IIC2_SDA   |
| B10     | -    | VA2        |
| B11     | -    | G          |
| B12     | -    | VA3        |
| B13     | -    | V          |
| B14     | -    | VIO3       |

| Pin No. | Type | Pin Name  |
|---------|------|-----------|
| B15     | —    | G         |
| B16     | D    | JT0_TMS   |
| B17     | A    | DET1      |
| B18     | J    | LCD_HSYNC |
| B19     | -    | G         |
| B20     | -    | V         |
| B21     | -    | VIO18     |
| B22     | J    | LCD_G1    |
| B23     | -    | G         |
| B24     | -    | G         |
| C1      | -    | G         |
| C2      | D    | DTV_DATA  |
| C3      | D    | URT2_SRIN |
| C4      | D    | URT2_RTSB |
| C5      | D    | URT0_RTSB |
| C6      | -    | G         |
| C7      | -    | VIO3      |
| C8      | D    | SP0_SI    |
| C9      | C    | IIC2_SCL  |
| C10     | C    | IIC_SDA   |
| C11     | -    | VA1       |
| C12     | E    | BOOTSEL1  |
| C13     | D    | GIO_P2    |
| C14     | —    | VIO3      |
| C15     | —    | G         |
| C16     | D    | JT0_TDI   |
| C17     | D    | JT0_RTCK  |
| C18     | J    | LCD_VSYNC |
| C19     | J    | LCD_B3    |
| C20     | J    | LCD_B0    |
| C21     | J    | LCD_G3    |
| C22     | J    | LCD_G2    |
| C23     | J    | LCD_G0    |
| C24     | —    | G         |
| D1      | C    | DTV_BCLK  |
| D2      | D    | DTV_PSYNC |
| D3      | D    | DTV_VLD   |
| D4      | D    | URT2_CTSB |

| Pin No. | Type | Pin Name   |
|---------|------|------------|
| D5      | D    | URT0_CTSB  |
| D6      | -    | G          |
| D7      | —    | VIO3       |
| D8      | D    | SP0_SO     |
| D9      | D    | PM0_SEN    |
| D10     | C    | IIC_SCL    |
| D11     | -    | VA1        |
| D12     | E    | BOOTSEL2   |
| D13     | D    | GIO_P3     |
| D14     | —    | VIO3       |
| D15     | -    | G          |
| D16     | D    | JT0_TDO    |
| D17     | C    | JT0_TRSTB  |
| D18     | J    | LCD_ENABLE |
| D19     | J    | LCD_B4     |
| D20     | J    | LCD_B1     |
| D21     | J    | LCD_G4     |
| D22     | J    | LCD_R5     |
| D23     | J    | LCD_R4     |
| D24     | J    | LCD_PXCLK  |
| E1      | -    | V          |
| E2      | -    | V          |
| E3      | -    | VIO18      |
| E4      | -    | VIO18      |
| E5      | D    | GIO_P6     |
| E6      | D    | GIO_P5     |
| E7      | D    | GIO_P4     |
| E8      | D    | SP0_CS2    |
| E9      | D    | SP0_CS0    |
| E10     | D    | PM0_SI     |
| E11     | R    | TE2        |
| E12     | E    | BOOTSEL3   |
| E13     | E    | BOOTSEL0   |
| E14     | D    | GIO_P0     |
| E15     | —    | G          |
| E16     | C    | JT0_TCK    |
| E17     | N    | TESTRSTB   |
| E18     | M    | TRSTB      |

(2/5)

| Pin No. | Type | Pin Name     |
|---------|------|--------------|
| E19     | J    | LCD_B5       |
| E20     | J    | LCD_B2       |
| E21     | J    | LCD_G5       |
| E22     | J    | LCD_R3       |
| E23     | J    | LCD_R2       |
| E24     | J    | LCD_R1       |
| F1      | -    | G            |
| F2      | -    | G            |
| F3      | -    | G            |
| F4      | -    | G            |
| F5      | D    | GIO_P7       |
| F6      | -    | G            |
| F20     | J    | LCD_R0       |
| F21     | M    | AB0_CSB3     |
| F22     | M    | AB0_CSB2     |
| F23     | -    | V            |
| F24     | -    | V            |
| G1      | -    | VDDQ_DDR     |
| G2      | -    | VDDQ_DDR     |
| G3      | -    | VDD_DDR      |
| G4      | -    | VDD_DDR      |
| G5      | D    | GIO_P8       |
| G20     | M    | AB0_CSB1     |
| G21     | -    | G            |
| G22     | -    | G            |
| G23     | -    | G            |
| G24     | -    | G            |
| H1      | C    | NTS_CLK      |
| H2      | D    | NTS_VS       |
| H3      | D    | NTS_HS       |
| H4      | D    | NTS_DATA0    |
| H5      | D    | NTS_DATA5    |
| H8      | D    | SP0_CS1      |
| H9      | D    | PM0_SO       |
| H10     | D    | ERR_RST_REQB |
| H11     | -    | G            |
| H12     | Q    | TE1          |
| H13     | C    | A_RESETB     |

| Pin No. | Type | Pin Name  |
|---------|------|-----------|
| H14     | D    | GIO_P1    |
| H15     | —    | G         |
| H16     | J    | DEBUG_EN  |
| H17     | E    | UTEST     |
| H20     | M    | AB0_CSB0  |
| H21     | -    | VDD_DDR   |
| H22     | -    | VDD_DDR   |
| H23     | -    | VDD_DDR   |
| H24     | -    | VDD_DDR   |
| J1      | D    | NTS_DATA1 |
| J2      | D    | NTS_DATA2 |
| J3      | D    | NTS_DATA3 |
| J4      | D    | NTS_DATA4 |
| J5      | D    | NTS_DATA6 |
| J8      | -    | G         |
| J9      | -    | G         |
| J10     | -    | G         |
| J11     | -    | G         |
| J12     | -    | G         |
| J13     | -    | G         |
| J14     | -    | G         |
| J15     | -    | G         |
| J16     | -    | G         |
| J17     | -    | G         |
| J20     | M    | AB0_WAIT  |
| J21     | M    | AB0_BEN1  |
| J22     | M    | AB0_BEN0  |
| J23     | M    | AB0_A26   |
| J24     | M    | AB0_A25   |
| K1      | C    | SD1_CK1   |
| K2      | D    | SD1_CMD   |
| K3      | D    | SD1_CK0   |
| K4      | D    | SD1_DATA0 |
| K5      | D    | NTS_DATA7 |
| K8      | -    | G         |
| K9      | -    | G         |
| K10     | —    | G         |
| K11     | —    | G         |

| Pin No. | Type | Pin Name  |
|---------|------|-----------|
| K12     | -    | G         |
| K13     | -    | G         |
| K14     | -    | G         |
| K15     | -    | G         |
| K16     | —    | G         |
| K17     | —    | IC        |
| K20     | M    | AB0_A24   |
| K21     | M    | AB0_A23   |
| K22     | M    | AB0_A22   |
| K23     | M    | AB0_A21   |
| K24     | M    | AB0_A20   |
| L1      | D    | SD1_DATA1 |
| L2      | D    | SD1_DATA2 |
| L3      | D    | SD1_DATA3 |
| L4      | D    | SD0_CMD   |
| L5      | D    | SD0_DATA0 |
| L8      | -    | G         |
| L9      | -    | G         |
| L10     | -    | G         |
| L11     | -    | G         |
| L12     | -    | G         |
| L13     | -    | G         |
| L14     | -    | G         |
| L15     | -    | G         |
| L16     | —    | G         |
| L17     | -    | G         |
| L20     | M    | AB0_A19   |
| L21     | -    | V         |
| L22     | -    | V         |
| L23     | -    | VIO18     |
| L24     | -    | VIO18     |
| M1      | -    | VIO3      |
| M2      | -    | VIO3      |
| M3      | -    | VIO3      |
| M4      | -    | VIO3      |
| M5      | D    | SD0_DATA1 |
| M8      | —    | G         |
| M9      | —    | G         |

**Remark** IC : Internally-connected pins (Leave open)

(3/5)

| Pin No. | Type | Pin Name |
|---------|------|----------|
| M10     | -    | G        |
| M11     | -    | G        |
| M12     | -    | G        |
| M13     | -    | G        |
| M14     | -    | G        |
| M15     | -    | G        |
| M16     | -    | G        |
| M17     | -    | G        |
| M20     | M    | AB0_A18  |
| M21     | -    | G        |
| M22     | -    | G        |
| M23     | -    | G        |
| M24     | -    | G        |
| N1      | -    | G        |
| N2      | -    | G        |
| N3      | -    | G        |
| N4      | -    | G        |
| N5      | -    | G        |
| N8      | -    | G        |
| N9      | -    | G        |
| N10     | -    | G        |
| N11     | -    | G        |
| N12     | -    | G        |
| N13     | -    | G        |
| N14     | -    | G        |
| N15     | —    | G        |
| N16     | —    | G        |
| N17     | —    | G        |
| N20     | M    | AB0_A17  |
| N21     | -    | VDD_DDR  |
| N22     | -    | VDD_DDR  |
| N23     | -    | VDD_DDR  |
| N24     | -    | VDD_DDR  |
| P1      | -    | VDD_DDR  |
| P2      | -    | VDD_DDR  |
| P3      | -    | VDDQ_DDR |
| P4      | -    | VDDQ_DDR |
| P5      | -    | VDDQ_DDR |

| Pin No. | Type | Pin Name  |
|---------|------|-----------|
| P8      | -    | G         |
| P9      | -    | G         |
| P10     | -    | G         |
| P11     | -    | G         |
| P12     | -    | G         |
| P13     | -    | G         |
| P14     | -    | G         |
| P15     | -    | G         |
| P16     | -    | G         |
| P17     | -    | G         |
| P20     | M    | AB0_WRB   |
| P21     | M    | AB0_RDB   |
| P22     | P    | AB0_AD15  |
| P23     | P    | AB0_AD14  |
| P24     | P    | AB0_AD13  |
| R1      | C    | SD0_CK1   |
| R2      | D    | SD0_DATA2 |
| R3      | D    | SD0_DATA3 |
| R4      | D    | SD2_CMD   |
| R5      | D    | GIO_P9    |
| R8      | -    | G         |
| R9      | -    | G         |
| R10     | -    | G         |
| R11     | -    | G         |
| R12     | -    | G         |
| R13     | -    | G         |
| R14     | -    | G         |
| R15     | -    | G         |
| R16     | —    | G         |
| R17     | —    | G         |
| R20     | P    | AB0_AD12  |
| R21     | P    | AB0_AD11  |
| R22     | P    | AB0_AD10  |
| R23     | P    | AB0_AD9   |
| R24     | J    | AB0_CLK   |
| T1      | D    | SD0_CKO   |
| T2      | D    | SD2_DATA0 |
| T3      | D    | SD2_DATA1 |

| Pin No. | Type | Pin Name  |
|---------|------|-----------|
| T4      | D    | SD2_DATA2 |
| T5      | D    | GIO_P10   |
| T8      | -    | G         |
| T9      | -    | G         |
| T10     | -    | G         |
| T11     | -    | G         |
| T12     | -    | IC        |
| T13     | -    | IC        |
| T14     | -    | G         |
| T15     | -    | G         |
| T16     | —    | G         |
| T17     | —    | G         |
| T20     | P    | AB0_AD8   |
| T21     | P    | AB0_AD7   |
| T22     | P    | AB0_AD6   |
| T23     | P    | AB0_AD5   |
| T24     | P    | AB0_AD4   |
| U1      | -    | V         |
| U2      | -    | V         |
| U3      | -    | V         |
| U4      | -    | V         |
| U5      | -    | V         |
| U8      | -    | G         |
| U9      | -    | G         |
| U10     | -    | G         |
| U11     | -    | G         |
| U12     | -    | IC        |
| U13     | -    | IC        |
| U14     | -    | IC        |
| U15     | —    | IC        |
| U16     | —    | IC        |
| U17     | —    | G         |
| U20     | P    | AB0_AD3   |
| U21     | -    | V         |
| U22     | -    | V         |
| U23     | -    | VIO18     |
| U24     | -    | VIO18     |
| V1      | —    | G         |

**Remark** IC : Internally-connected pins (Leave open)

(4/5)

| Pin No. | Type | Pin Name |
|---------|------|----------|
| V2      | -    | G        |
| V3      | -    | G        |
| V4      | -    | G        |
| V5      | -    | G        |
| V20     | P    | AB0_AD2  |
| V21     | -    | G        |
| V22     | -    | G        |
| V23     | -    | G        |
| V24     | -    | G        |
| W1      | -    | VDDQ_DDR |
| W2      | -    | VDDQ_DDR |
| W3      | -    | VDD_DDR  |
| W4      | -    | VDD_DDR  |
| W5      | —    | IC       |
| W20     | P    | AB0_AD1  |
| W21     | -    | VDD_DDR  |
| W22     | -    | VDD_DDR  |
| W23     | -    | VDD_DDR  |
| W24     | -    | VDD_DDR  |
| Y1      | -    | VIO3     |
| Y2      | -    | VIO3     |
| Y3      | -    | VIO3     |
| Y4      | -    | VIO3     |
| Y5      | -    | IC       |
| Y6      | -    | IC       |
| Y7      | -    | IC       |
| Y8      | -    | IC       |
| Y9      | -    | IC       |
| Y10     | -    | IC       |
| Y11     | -    | V        |
| Y12     | -    | IC       |
| Y13     | -    | IC       |
| Y14     | -    | IC       |
| Y15     | -    | IC       |
| Y16     | -    | IC       |
| Y17     | -    | IC       |
| Y18     | -    | IC       |
| Y19     | -    | IC       |
| Y20     | -    | IC       |

| Pin No. | Type | Pin Name  |
|---------|------|-----------|
| Y21     | P    | AB0_AD0   |
| Y22     | G    | AB0_ADV   |
| Y23     | G    | USB_STP   |
| Y24     | G    | USB_CLK   |
| AA1     | C    | SD2_CK1   |
| AA2     | D    | SD2_DATA3 |
| AA3     | -    | IC        |
| AA4     | -    | IC        |
| AA5     | -    | IC        |
| AA6     | -    | G         |
| AA7     | -    | IC        |
| AA8     | -    | IC        |
| AA9     | -    | IC        |
| AA10    | -    | G         |
| AA11    | -    | V         |
| AA12    | -    | IC        |
| AA13    | -    | IC        |
| AA14    | -    | IC        |
| AA15    | -    | G         |
| AA16    | -    | IC        |
| AA17    | -    | IC        |
| AA18    | -    | VIO18     |
| AA19    | -    | G         |
| AA20    | -    | IC        |
| AA21    | G    | USB_DATA7 |
| AA22    | G    | USB_DATA6 |
| AA23    | G    | USB_DATA5 |
| AA24    | G    | USB_NXT   |
| AB1     | -    | G         |
| AB2     | D    | SD2_CK0   |
| AB3     | -    | IC        |
| AB4     | -    | IC        |
| AB5     | -    | IC        |
| AB6     | -    | G         |
| AB7     | -    | VIO18     |
| AB8     | -    | IC        |
| AB9     | -    | IC        |
| AB10    | -    | G         |
| AB11    | -    | VIO18     |

| Pin No. | Type | Pin Name  |
|---------|------|-----------|
| AB12    | -    | IC        |
| AB13    | -    | IC        |
| AB14    | -    | IC        |
| AB15    | -    | G         |
| AB16    | -    | IC        |
| AB17    | -    | IC        |
| AB18    | -    | VIO18     |
| AB19    | -    | G         |
| AB20    | -    | IC        |
| AB21    | G    | USB_DATA4 |
| AB22    | G    | USB_DIR   |
| AB23    | G    | USB_DATA3 |
| AB24    | -    | G         |
| AC1     | -    | G         |
| AC2     | -    | G         |
| AC3     | -    | IC        |
| AC4     | -    | IC        |
| AC5     | -    | V         |
| AC6     | -    | G         |
| AC7     | -    | VIO18     |
| AC8     | -    | IC        |
| AC9     | -    | IC        |
| AC10    | -    | G         |
| AC11    | -    | VIO18     |
| AC12    | -    | IC        |
| AC13    | -    | IC        |
| AC14    | -    | IC        |
| AC15    | -    | G         |
| AC16    | -    | IC        |
| AC17    | -    | IC        |
| AC18    | -    | V         |
| AC19    | -    | G         |
| AC20    | -    | IC        |
| AC21    | G    | USB_DATA1 |
| AC22    | G    | USB_DATA2 |
| AC23    | -    | G         |
| AC24    | -    | G         |
| AD1     | -    | G         |
| AD2     | -    | G         |

(5/5)


| Pin No. | Type | Pin Name  |
|---------|------|-----------|
| AD3     | -    | G         |
| AD4     | -    | IC        |
| AD5     | -    | V         |
| AD6     | -    | G         |
| AD7     | -    | VIO18     |
| AD8     | -    | IC        |
| AD9     | -    | IC        |
| AD10    | -    | G         |
| AD11    | -    | VIO18     |
| AD12    | -    | IC        |
| AD13    | -    | IC        |
| AD14    | -    | IC        |
| AD15    | -    | G         |
| AD16    | -    | IC        |
| AD17    | -    | IC        |
| AD18    | -    | V         |
| AD19    | -    | G         |
| AD20    | —    | IC        |
| AD21    | G    | USB_DATA0 |
| AD22    | —    | G         |
| AD23    | —    | G         |
| AD24    | —    | G         |

## CONTENTS

|                                                   |           |
|---------------------------------------------------|-----------|
| <b>1. PIN FUNCTIONS .....</b>                     | <b>12</b> |
| <b>1.1 Pin Configuration .....</b>                | <b>12</b> |
| <b>1.2 Pin Functions .....</b>                    | <b>13</b> |
| <b>1.3 I/O Circuits .....</b>                     | <b>27</b> |
| <b>2. ELECTRICAL SPECIFICATIONS .....</b>         | <b>31</b> |
| <b>2.1 Absolute Maximum Ratings .....</b>         | <b>31</b> |
| <b>2.2 Recommended Operating Conditions .....</b> | <b>31</b> |
| <b>2.3 Capacitance .....</b>                      | <b>32</b> |
| <b>2.4 DC Characteristics .....</b>               | <b>33</b> |
| <b>2.5 AC Characteristics .....</b>               | <b>36</b> |
| <b>3. PACKAGE DRAWING.....</b>                    | <b>60</b> |

## 1. PIN FUNCTIONS

### 1.1 Pin Configuration

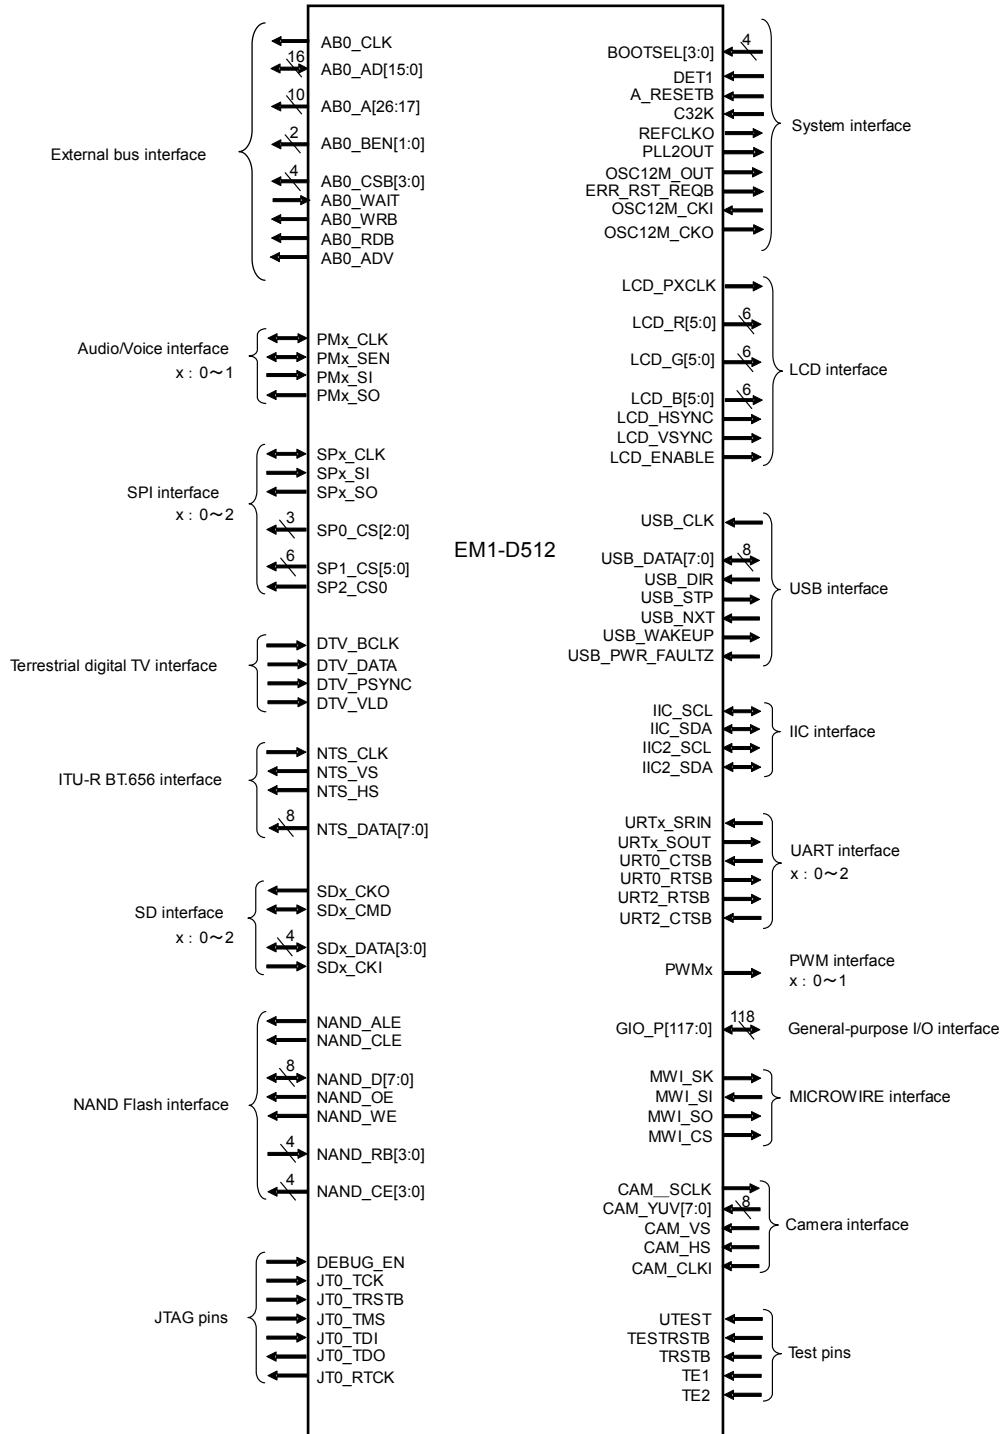

## 1.2 Pin Functions

### (1) Boot select signals (VIO18)

| Pin Name | Pin No. | I/O   | Function              | Alternate Pin Function | Type | Handling When Not Used |
|----------|---------|-------|-----------------------|------------------------|------|------------------------|
| BOOTSEL3 | E12     | Input | Boot mode selection 3 | –                      | E    | –                      |
| BOOTSEL2 | D12     | Input | Boot mode selection 2 | –                      | E    | –                      |
| BOOTSEL1 | C12     | Input | Boot mode selection 1 | –                      | E    | –                      |
| BOOTSEL0 | E13     | Input | Boot mode selection 0 | –                      | E    | –                      |

### (2) System control signals (VIO3 / VIO18)

| Pin Name                  | Pin No. | I/O    | Function                     | Alternate Pin Function | Type | Handling When Not Used |
|---------------------------|---------|--------|------------------------------|------------------------|------|------------------------|
| DET1                      | B17     | Input  | Power-on reset               | –                      | A    | –                      |
| A_RESETB                  | H13     | Input  | System reset                 | –                      | C    | –                      |
| C32K                      | A9      | Input  | Reference clock (32.768 kHz) | –                      | B    | –                      |
| REFCLKO                   | A16     | Output | Reference clock              | PLL2OUT<br>OSC12M_OUT  | D    | Leave open.            |
| PLL2OUT                   | A16     | Output | Internal PLL2 output         | REFCLKO<br>OSC12M_OUT  | D    | Leave open.            |
| OSC12M_OUT                | A16     | Output | Internal OSC output          | REFCLKO<br>PLL2OUT     | D    | Leave open.            |
| ERR_RST_REQB              | H10     | Output | Error reset request          | –                      | D    | Leave open.            |
| OSC12M_CK <sup>NOTE</sup> | A18     | Input  | OSC XT1                      | –                      | Z    | Leave open.            |
| OSC12M_CK <sup>NOTE</sup> | A17     | Output | OSC XT2                      | –                      | Z    | Leave open.            |

**Note** VIO18

**(3) External bus interface signals (VIO18)**

| Pin Name     | Pin No.                                                                                       | I/O    | Function       | Alternate Pin Function                        | Type | Handling When Not Used |
|--------------|-----------------------------------------------------------------------------------------------|--------|----------------|-----------------------------------------------|------|------------------------|
| AB0_CLK      | R24                                                                                           | Output | Clock          | GIO_P11<br>NTS_CLK                            | J    | Leave open.            |
| AB0_AD[15:0] | P22, P23, P24,<br>R20, R21, R22,<br>R23, T20, T21,<br>T22, T23, T24,<br>U20, V20, W20,<br>Y21 | I/O    | Data           | GIO_P[27:12]                                  | P    | Leave open.            |
| AB0_A[26:20] | J23, J24, K20, K21,<br>K22, K23, K24                                                          | Output | Address        | GIO_P[37:31]<br>AB0_A[10:4]                   | M    | Leave open.            |
| AB0_A[19:17] | L20, M20, N20                                                                                 | Output | Address        | GIO_P[30:28]<br>NTS_DATA[2:0]<br>AB0_A[3:1]   | M    | Leave open.            |
| AB0_A[10:4]  | J23, J24, K20, K21,<br>K22, K23, K24                                                          | Output | Address        | GIO_P[37:31]<br>AB0_A[26:20]                  | M    | Leave open.            |
| AB0_A[3:1]   | L20, M20, N20                                                                                 | Output | Address        | GIO_P[30:28]<br>NTS_DATA[2:0]<br>AB0_A[19:17] | M    | Leave open.            |
| AB0_BEN[1:0] | J21, J22                                                                                      | Output | Byte enable    | GIO_P[47:46]                                  | M    | Leave open.            |
| AB0_CSB3     | F21                                                                                           | Output | Chip select    | GIO_P45<br>NTS_HS                             | M    | Leave open.            |
| AB0_CSB2     | F22                                                                                           | Output | Chip select    | GIO_P44<br>NTS_VS                             | M    | Leave open.            |
| AB0_CSB1     | G20                                                                                           | Output | Chip select    | GIO_P43<br>NTS_DATA7                          | M    | Leave open.            |
| AB0_CSB0     | H20                                                                                           | Output | Chip select    | GIO_P42<br>NTS_DATA6                          | M    | Leave open.            |
| AB0_WAIT     | J20                                                                                           | Input  | Wait           | GIO_P41<br>NTS_DATA5                          | M    | Leave open.            |
| AB0_WRB      | P20                                                                                           | Output | Write strobe   | GIO_P40<br>NTS_DATA4                          | M    | Leave open.            |
| AB0_RDB      | P21                                                                                           | Output | Read strobe    | GIO_P39<br>NTS_DATA3                          | M    | Leave open.            |
| AB0_ADV      | Y22                                                                                           | Output | Address enable | GIO_P38                                       | G    | Leave open.            |

**(4) Audio interface signals (VIO3)**

| Pin Name | Pin No. | I/O    | Function                                   | Alternate Pin Function          | Type | Handling When Not Used |
|----------|---------|--------|--------------------------------------------|---------------------------------|------|------------------------|
| PM0_CLK  | A8      | I/O    | PCM0 clock (default input)                 | –                               | C    | Leave open.            |
| PM0_SEN  | D9      | I/O    | PCM0 frame synchronization (default input) | –                               | D    | Leave open.            |
| PM0_SI   | E10     | Input  | PCM0 data                                  | GIO_P87                         | D    | Leave open.            |
| PM0_SO   | H9      | Output | PCM0 data                                  | –                               | D    | Leave open.            |
| PM1_CLK  | H1      | I/O    | PCM1 clock (default input)                 | GIO_P72<br>NTS_CLK              | C    | Leave open.            |
| PM1_SEN  | H5      | I/O    | PCM1 frame synchronization (default input) | GIO_P80<br>NTS_DATA5<br>SP1_CS4 | D    | Leave open.            |
| PM1_SI   | J5      | Input  | PCM1 data                                  | GIO_P81<br>NTS_DATA6<br>SP1_CS5 | D    | Leave open.            |
| PM1_SO   | K5      | Output | PCM1 data                                  | GIO_P82<br>NTS_DATA7            | D    | Leave open.            |

**(5) Camera interface signals (VIO3)**

| Pin Name | Pin No. | I/O    | Function         | Alternate Pin Function        | Type | Handling When Not Used |
|----------|---------|--------|------------------|-------------------------------|------|------------------------|
| CAM_SCLK | E6      | Output | Camera clock     | GIO_P5, NAND_RB2              | D    | Leave open.            |
| CAM_CLKI | K1      | Input  | Camera interface | GIO_P92, SD1_CKI              | C    | Leave open.            |
| CAM_YUV7 | L1      | Input  | Camera interface | SD1_DATA1                     | D    | Leave open.            |
| CAM_YUV6 | K4      | Input  | Camera interface | SD1_DATA0                     | D    | Leave open.            |
| CAM_YUV5 | K2      | Input  | Camera interface | SD1_CMD                       | D    | Leave open.            |
| CAM_YUV4 | J4      | Input  | Camera interface | NTS_DATA4, SP1_CS3<br>GIO_P79 | D    | Leave open.            |
| CAM_YUV3 | J3      | Input  | Camera interface | NTS_DATA3, SP1_CS2<br>GIO_P78 | D    | Leave open.            |
| CAM_YUV2 | J2      | Input  | Camera interface | NTS_DATA2, SP1_CS1<br>GIO_P77 | D    | Leave open.            |
| CAM_YUV1 | J1      | Input  | Camera interface | NTS_DATA1, SP1_CS0<br>GIO_P76 | D    | Leave open.            |
| CAM_YUV0 | H4      | Input  | Camera interface | NTS_DATA0, SP1_SO<br>GIO_P75  | D    | Leave open.            |
| CAM_HS   | L3      | Input  | Camera interface | SD1_DATA3                     | D    | Leave open.            |
| CAM_VS   | L2      | Input  | Camera interface | SD1_DATA2                     | D    | Leave open.            |

**(6) SPI interface signals (VIO3)**

| Pin Name    | Pin No.    | I/O    | Function          | Alternate Pin Function                        | Type | Handling When Not Used |
|-------------|------------|--------|-------------------|-----------------------------------------------|------|------------------------|
| SP0_CLK     | B8         | I/O    | SPI0 clock output | MWI_SK                                        | D    | Leave open.            |
| SP0_SI      | C8         | Input  | SPI0 data         | MWI_SI                                        | D    | Leave open.            |
| SP0_SO      | D8         | Output | SPI0 data         | MWI_SO                                        | D    | Leave open.            |
| SP0_CS0     | E9         | I/O    | SPI0 chip select  | MWI_CS                                        | D    | Leave open.            |
| SP0_CS[2:1] | E8, H8     | Output | SPI0 chip select  | GIO_P[49:48]                                  | D    | Leave open.            |
| SP1_CLK     | H2         | I/O    | SPI1 clock input  | GIO_P73<br>NTS_VS                             | D    | Leave open.            |
| SP1_SI      | H3         | Input  | SPI1 data         | GIO_P74<br>NTS_HS                             | D    | Leave open.            |
| SP1_SO      | H4         | Output | SPI1 data         | GIO_P75<br>NTS_DATA0<br>CAM_YUV0              | D    | Leave open.            |
| SP1_CS5     | J5         | Output | SPI1 chip select  | GIO_P81<br>NTS_DATA6<br>PM1_SI                | D    | Leave open.            |
| SP1_CS4     | H5         | Output | SPI1 chip select  | GIO_P80<br>NTS_DATA5<br>PM1_SEN               | D    | Leave open.            |
| SP1_CS[3:1] | J4, J3, J2 | Output | SPI1 chip select  | GIO_P[79:77]<br>NTS_DATA[4:2]<br>CAM_YUV[4:2] | D    | Leave open.            |
| SP1_CS0     | J1         | I/O    | SPI1 chip select  | GIO_P76<br>NTS_DATA1<br>CAM_YUV1              | D    | Leave open.            |
| SP2_CLK     | D1         | I/O    | SPI2 clock input  | DTV_BCLK                                      | C    | Leave open.            |
| SP2_SI      | C2         | Input  | SPI2 data         | DTV_DATA                                      | D    | Leave open.            |
| SP2_SO      | D2         | Output | SPI2 data         | DTV_PSYNC                                     | D    | Leave open.            |
| SP2_CS0     | D3         | I/O    | SPI2 chip select  | DTV_VLD                                       | D    | Leave open.            |

**(7) Terrestrial digital TV interface signals (VIO3)**

| Pin Name  | Pin No. | I/O   | Function                   | Alternate Pin Function | Type | Handling When Not Used |
|-----------|---------|-------|----------------------------|------------------------|------|------------------------|
| DTV_BCLK  | D1      | Input | Clock                      | SP2_CLK                | C    | Leave open.            |
| DTV_DATA  | C2      | Input | YUV data                   | SP2_SI                 | D    | Leave open.            |
| DTV_PSYNC | D2      | Input | Vertical synchronization   | SP2_SO                 | D    | Leave open.            |
| DTV_VLD   | D3      | Input | Horizontal synchronization | SP2_CS0                | D    | Leave open.            |

**(8) LCD interface signals (VIO18)**

| Pin Name   | Pin No.                         | I/O    | Function                   | Alternate Pin Function | Type | Handling When Not Used |
|------------|---------------------------------|--------|----------------------------|------------------------|------|------------------------|
| LCD_PXCLK  | D24                             | Output | Pixel clock                | GIO_P50                | J    | Leave open.            |
| LCD_R[5:0] | D22, D23, E22,<br>E23, E24, F20 | Output | Red data                   | GIO_P[56:51]           | J    | Leave open.            |
| LCD_G[5:0] | E21, D21, C21,<br>C22, B22, C23 | Output | Green data                 | GIO_P[62:57]           | J    | Leave open.            |
| LCD_B[5:0] | E19, D19, C19,<br>E20, D20, C20 | Output | Blue data                  | GIO_P[68:63]           | J    | Leave open.            |
| LCD_HSYNC  | B18                             | Output | Horizontal synchronization | GIO_P69                | J    | Leave open.            |
| LCD_VSYNC  | C18                             | Output | Vertical synchronization   | GIO_P70                | J    | Leave open.            |
| LCD_ENABLE | D18                             | Output | Data enable                | GIO_P71                | J    | Leave open.            |

**(9) USB interface signals (VIO18 / VIO3)**

| Pin Name                      | Pin No.                                                 | I/O    | Function        | Alternate Pin Function  | Type | Handling When Not Used |
|-------------------------------|---------------------------------------------------------|--------|-----------------|-------------------------|------|------------------------|
| USB_CLK                       | Y24                                                     | Input  | Clock           | GIO_P96                 | G    | Leave open.            |
| USB_DATA[7:0]                 | AA21, AA22,<br>AA23, AB21,<br>AB23, AC22,<br>AC21, AD21 | I/O    | USB data        | GIO_P[104:97]           | G    | Leave open.            |
| USB_DIR                       | AB22                                                    | Input  | USB DIR input   | GIO_P105                | G    | Leave open.            |
| USB_STP                       | Y23                                                     | Output | USB STOP output | GIO_P106                | G    | Leave open.            |
| USB_NXT                       | AA24                                                    | Input  | USB NXT input   | GIO_P107                | G    | Leave open.            |
| USB_WAKEUP <sup>NOTE</sup>    | H14                                                     | Output | Suspend wakeup  | GIO_P1<br>USB_PWR_FAULT | D    | Leave open.            |
| USB_PWR_FAULT <sup>NOTE</sup> | H14                                                     | Input  | Power fault     | GIO_P1<br>USB_WAKEUP    | D    | Leave open.            |

**Note** VIO3

## (10) ITU-R BT.656 interface signals (VIO3 / VIO18)

| Pin Name  | Pin No.             | I/O    | Function                   | Alternate Pin Function       | Type | Handling When Not Used |
|-----------|---------------------|--------|----------------------------|------------------------------|------|------------------------|
| NTS_CLK   | H1                  | Input  | Clock                      | GIO_P72, PM1_CLK             | C    | Leave open.            |
|           | R24 <sup>Note</sup> |        |                            | AB0_CLK, GIO_P11             | J    | Leave open             |
| NTS_VS    | H2                  | Output | Vertical synchronization   | GIO_P73, SP1_CLK             | D    | Leave open.            |
|           | F22 <sup>Note</sup> |        |                            | AB0_CSB2, GIO_P44            | M    | Leave open.            |
| NTS_HS    | H3                  | Output | Horizontal synchronization | GIO_P74, SP1_SI              | D    | Leave open.            |
|           | F21 <sup>Note</sup> |        |                            | AB0_CSB3, GIO_P45            | M    | Leave open.            |
| NTS_DATA7 | K5                  | Output | NTSC data                  | GIO_P82, PM1_SO              | D    | Leave open.            |
|           | G20 <sup>Note</sup> |        |                            | AB0_CSB1, GIO_P43            | M    | Leave open             |
| NTS_DATA6 | J5                  | Output | NTSC data                  | GIO_P81, SP1_CS5<br>PM1_SI   | D    | Leave open.            |
|           | H20 <sup>Note</sup> |        |                            | AB0_CSB0, GIO_P42            | M    | Leave ope              |
| NTS_DATA5 | H5                  | Output | NTSC data                  | GIO_P80, SP1_CS4<br>PM1_SEN  | D    | Leave open.            |
|           | J20 <sup>Note</sup> |        |                            | AB0_WAIT, GIO_P41            | M    | Leave open.            |
| NTS_DATA4 | J4                  | Output | NTSC data                  | GIO_P79, SP1_CS3<br>CAM_YUV4 | D    | Leave open.            |
|           | P20 <sup>Note</sup> |        |                            | AB0_WRB, GIO_P40             | M    | Leave open.            |
| NTS_DATA3 | J3                  | Output | NTSC data                  | GIO_P78, SP1_CS2<br>CAM_YUV3 | D    | Leave open.            |
|           | P21 <sup>Note</sup> |        |                            | AB0_RDB, GIO_P39             | M    | Leave open             |
| NTS_DATA2 | J2                  | Output | NTSC data                  | GIO_P77, SP1_CS1<br>CAM_YUV2 | D    | Leave open.            |
|           | L20 <sup>Note</sup> |        |                            | AB0_A3, AB0_A19,<br>GIO_P30  | M    | Leave open             |
| NTS_DATA1 | J1                  | Output | NTSC data                  | GIO_P76, SP1_CS0<br>CAM_YUV1 | D    | Leave open.            |
|           | M20 <sup>Note</sup> |        |                            | AB0_A2, AB0_A18,<br>GIO_P29  | M    | Leave ope              |
| NTS_DATA0 | H4                  | Output | NTSC data                  | GIO_P75, SPI_SO<br>CAM_YUV0  | D    | Leave open.            |
|           | N20 <sup>Note</sup> |        |                            | AB0_A1, AB0_A17,<br>GIO_P28  | M    | Leave open.            |

**Note** VIO18

**(11) IIC interface signals (VIO3)**

| Pin Name | Pin No. | I/O    | Function           | Alternate Pin Function | Type | Handling When Not Used |
|----------|---------|--------|--------------------|------------------------|------|------------------------|
| IIC_SCL  | D10     | Output | Serial clock input | GIO_P83                | C    | Leave open.            |
| IIC_SDA  | C10     | I/O    | Serial data input  | GIO_P84                | C    | Leave open.            |
| IIC2_SCL | C9      | Output | Serial clock input | NAND_WE                | C    | Leave open.            |
| IIC2_SDA | B9      | I/O    | Serial data input  | NAND_RB0               | C    | Leave open.            |

**(12) UART interface signals (VIO3)**

| Pin Name  | Pin No. | I/O    | Function                                                | Alternate Pin Function | Type | Handling When Not Used |
|-----------|---------|--------|---------------------------------------------------------|------------------------|------|------------------------|
| URT0_SRIN | A5      | Input  | Serial data                                             | –                      | D    | Leave open.            |
| URT0_SOUT | B5      | Output | Serial data                                             | –                      | D    | Leave open.            |
| URT0_CTSB | D5      | Input  | Data transmission/reception ready in destination device | GIO_P85<br>URT1_SRIN   | D    | Leave open.            |
| URT0_RTSB | C5      | Output | Data transmission/reception ready                       | GIO_P86<br>URT1_SOUT   | D    | Leave open.            |
| URT1_SRIN | D5      | Input  | Serial data                                             | GIO_P85<br>URT0_CTSB   | D    | Leave open.            |
| URT1_SOUT | C5      | Output | Serial data                                             | GIO_P86<br>URT0_RTSB   | D    | Leave open.            |
| URT2_SRIN | C3      | Input  | Serial data                                             | GIO_P108<br>NAND_ALE   | D    | Leave open.            |
| URT2_SOUT | B3      | Output | Serial data                                             | GIO_P109<br>NAND_CLE   | D    | Leave open.            |
| URT2_CTSB | D4      | Input  | Data transmission/reception ready in destination device | GIO_P110<br>NAND_D0    | D    | Leave open.            |
| URT2_RTSB | C4      | Output | Data transmission/reception ready                       | GIO_P111<br>NAND_D1    | D    | Leave open.            |

**(13) Memory card interface signals (VIO3)**

| Pin Name      | Pin No.            | I/O    | Function         | Alternate Pin Function        | Type | Handling When Not Used |
|---------------|--------------------|--------|------------------|-------------------------------|------|------------------------|
| SD0_CKO       | T1                 | Output | Clock            | -                             | D    | Leave open.            |
| SD0_CMD       | L4                 | I/O    | Command response | -                             | D    | Leave open.            |
| SD0_DATA[3:1] | R3, R2,<br>M5      | I/O    | Data             | GIO_P[90:88]                  | D    | Leave open.            |
| SD0_DATA0     | L5                 | I/O    | Data             | -                             | D    | Leave open.            |
| SD0_CKI       | R1                 | Input  | Loop back        | GIO_P91                       | C    | Leave open.            |
| SD1_CKO       | K3                 | Output | Clock            | -                             | D    | Leave open.            |
| SD1_CMD       | K2                 | I/O    | Command response | CAM_YUV5                      | D    | Leave open.            |
| SD1_DATA3     | L3                 | I/O    | Data             | CAM_HS                        | D    | Leave open.            |
| SD1_DATA2     | L2                 | I/O    | Data             | CAM_VS                        | D    | Leave open.            |
| SD1_DATA1     | L1                 | I/O    | Data             | CAM_YUV7                      | D    | Leave open.            |
| SD1_DATA0     | K4                 | I/O    | Data             | CAM_YUV6                      | D    | Leave open.            |
| SD1_CKI       | K1                 | Input  | Loop back        | GIO_P92<br>CAM_CLKI           | C    | Leave open.            |
| SD2_CKO       | AB2                | Output | Clock            | GIO_P112<br>NAND_D2           | D    | Leave open.            |
| SD2_CMD       | R4                 | I/O    | Command response | GIO_P113<br>NAND_D3           | D    | Leave open.            |
| SD2_DATA[3:0] | AA2, T4,<br>T3, T2 | I/O    | Data             | GIO_P[117:114]<br>NAND_D[7:4] | D    | Leave open.            |
| SD2_CKI       | AA1                | Input  | Loop back        | GPIO_P93<br>NAND_OE           | C    | Leave open.            |

**(14) PWM interface signals (VIO3)**

| Pin Name | Pin No. | I/O    | Function   | Alternate Pin Function | Type | Handling When Not Used |
|----------|---------|--------|------------|------------------------|------|------------------------|
| PWM0     | A4      | Output | PWM output | GIO_P94                | D    | Leave open.            |
| PWM1     | B4      | Output | PWM output | GIO_P95                | D    | Leave open.            |

**(15) General-purpose I/O interface signals (VIO18 / VIO3)**

(1/3)

| Pin Name                      | Pin No.                                                 | I/O | Function           | Alternate Pin Function       | Type | Handling When Not Used |
|-------------------------------|---------------------------------------------------------|-----|--------------------|------------------------------|------|------------------------|
| GIO_P[117:114]                | AA2, T4, T3, T2                                         | I/O | General-purpose IO | SD2_DATA[3:0]<br>NAND_D[7:4] | D    | Leave open.            |
| GIO_P113                      | R4                                                      | I/O | General-purpose IO | SD2_CMD<br>NAND_D3           | D    | Leave open.            |
| GIO_P112                      | AB2                                                     | I/O | General-purpose IO | SD2_CKO<br>NAND_D2           | D    | Leave open.            |
| GIO_P111                      | C4                                                      | I/O | General-purpose IO | URT2_RTSTB<br>NAND_D1        | D    | Leave open.            |
| GIO_P110                      | D4                                                      | I/O | General-purpose IO | URT2_CTSTB<br>NAND_D0        | D    | Leave open.            |
| GIO_P109                      | B3                                                      | I/O | General-purpose IO | URT2_SOUT<br>NAND_CLE        | D    | Leave open.            |
| GIO_P108                      | C3                                                      | I/O | General-purpose IO | URT2_SRIN<br>NAND_ALE        | D    | Leave open.            |
| GIO_P107 <sup>Note</sup>      | AA24                                                    | I/O | General-purpose IO | USB_NXT                      | G    | Leave open.            |
| GIO_P106 <sup>Note</sup>      | Y23                                                     | I/O | General-purpose IO | USB_STP                      | G    | Leave open.            |
| GIO_P105 <sup>Note</sup>      | AB22                                                    | I/O | General-purpose IO | USB_DIR                      | G    | Leave open.            |
| GIO_P[104:97] <sup>Note</sup> | AA21, AA22,<br>AA23, AB21,<br>AB23, AC22,<br>AC21, AD21 | I/O | General-purpose IO | USB_DATA[7:0]                | G    | Leave open.            |
| GIO_P96 <sup>Note</sup>       | Y24                                                     | I/O | General-purpose IO | USB_CLK                      | G    | Leave open.            |
| GIO_P[95:94]                  | B4, A4                                                  | I/O | General-purpose IO | PWM[1:0]                     | D    | Leave open.            |
| GIO_P93                       | AA1                                                     | I/O | General-purpose IO | SD2_CK1<br>NAND_OE           | C    | Leave open.            |
| GIO_P92                       | K1                                                      | I/O | General-purpose IO | SD1_CK1<br>CAM_CLK1          | C    | Leave open.            |
| GIO_P91                       | R1                                                      | I/O | General-purpose IO | SD0_CK1                      | C    | Leave open.            |
| GIO_P[90:88]                  | R3, R2, M5                                              | I/O | General-purpose IO | SD0_DATA[3:1]                | D    | Leave open.            |
| GIO_P87                       | E10                                                     | I/O | General-purpose IO | PM0_SI                       | D    | Leave open.            |
| GIO_P86                       | C5                                                      | I/O | General-purpose IO | URT0_RTSTB<br>URT1_SOUT      | D    | Leave open.            |
| GIO_P85                       | D5                                                      | I/O | General-purpose IO | URT0_CTSTB<br>URT1_SRIN      | D    | Leave open.            |
| GIO_P84                       | C10                                                     | I/O | General-purpose IO | IIC_SDA                      | C    | Leave open.            |
| GIO_P83                       | D10                                                     | I/O | General-purpose IO | IIC_SCL                      | C    | Leave open.            |

(2/3)

| Pin Name                     | Pin No.                         | I/O | Function           | Alternate Pin Function                       | Type | Handling When Not Used |
|------------------------------|---------------------------------|-----|--------------------|----------------------------------------------|------|------------------------|
| GIO_P82                      | K5                              | I/O | General-purpose IO | NTS_DATA7<br>PM1_SO                          | D    | Leave open.            |
| GIO_P81                      | J5                              | I/O | General-purpose IO | NTS_DATA6<br>SP1_CS5<br>PM1_SI               | D    | Leave open.            |
| GIO_P80                      | H5                              | I/O | General-purpose IO | NTS_DATA5<br>SP1_CS4<br>PM1_SEN              | D    | Leave open.            |
| GIO_P[79:76]                 | J4, J3, J2, J1                  | I/O | General-purpose IO | NTS_DATA[4:1]<br>SP1_CS[3:0]<br>CAM_YUV[4:1] | D    | Leave open.            |
| GIO_P75                      | H4                              | I/O | General-purpose IO | NTS_DATA0<br>SP1_SO<br>CAM_YUV0              | D    | Leave open.            |
| GIO_P74                      | H3                              | I/O | General-purpose IO | NTS_HS<br>SP1_SI                             | D    | Leave open.            |
| GIO_P73                      | H2                              | I/O | General-purpose IO | NTS_VS<br>SP1_CLK                            | D    | Leave open.            |
| GIO_P72                      | H1                              | I/O | General-purpose IO | NTS_CLK<br>PM1_CLK                           | C    | Leave open.            |
| GIO_P71 <sup>Note</sup>      | D18                             | I/O | General-purpose IO | LCD_ENABLE                                   | J    | Leave open.            |
| GIO_P70 <sup>Note</sup>      | C18                             | I/O | General-purpose IO | LCD_VSYNC                                    | J    | Leave open.            |
| GIO_P69 <sup>Note</sup>      | B18                             | I/O | General-purpose IO | LCD_HSYNC                                    | J    | Leave open.            |
| GIO_P[68:63] <sup>Note</sup> | E19, D19, C19,<br>E20, D20, C20 | I/O | General-purpose IO | LCD_B[5:0]                                   | J    | Leave open.            |
| GIO_P[62:57] <sup>Note</sup> | E21, D21, C21,<br>C22, B22, C23 | I/O | General-purpose IO | LCD_G[5:0]                                   | J    | Leave open.            |
| GIO_P[56:51] <sup>Note</sup> | D22, D23, E22,<br>E23, E24, F20 | I/O | General-purpose IO | LCD_R[5:0]                                   | J    | Leave open.            |
| GIO_P50 <sup>Note</sup>      | D24                             | I/O | General-purpose IO | LCD_PXCLK                                    | J    | Leave open.            |
| GIO_P[49:48] <sup>Note</sup> | E8, H8                          | I/O | General-purpose IO | SP0_CS[2:1]                                  | D    | Leave open.            |
| GIO_P[47:46] <sup>Note</sup> | J21, J22                        | I/O | General-purpose IO | AB0_BEN[1:0]                                 | M    | Leave open.            |
| GIO_P45 <sup>Note</sup>      | F21                             | I/O | General-purpose IO | AB0_CSB3<br>NTS_HS                           | M    | Leave open.            |
| GIO_P44 <sup>Note</sup>      | F22                             | I/O | General-purpose IO | AB0_CSB2<br>NTS_VS                           | M    | Leave open.            |
| GIO_P43 <sup>Note</sup>      | G20                             | I/O | General-purpose IO | AB0_CSB1<br>NTS_DATA7                        | M    | Leave open.            |
| GIO_P42 <sup>Note</sup>      | H20                             | I/O | General-purpose IO | AB0_CSB0<br>NTS_DATA6                        | M    | Leave open.            |

(3/3)

| Pin Name                     | Pin No.                                                                                       | I/O | Function           | Alternate Pin Function                      | Type | Handling When Not Used |
|------------------------------|-----------------------------------------------------------------------------------------------|-----|--------------------|---------------------------------------------|------|------------------------|
| GIO_P41 <sup>Note</sup>      | J20                                                                                           | I/O | General-purpose IO | AB0_WAIT<br>NTS_DATA5                       | M    | Leave open.            |
| GIO_P40 <sup>Note</sup>      | P20                                                                                           | I/O | General-purpose IO | AB0_WRB<br>NTS_DATA4                        | M    | Leave open.            |
| GIO_P39 <sup>Note</sup>      | P21                                                                                           | I/O | General-purpose IO | AB0_RDB<br>NTS_DATA3                        | M    | Leave open.            |
| GIO_P38 <sup>Note</sup>      | Y22                                                                                           | I/O | General-purpose IO | AB0_ADV                                     | G    | Leave open.            |
| GIO_P[37:31] <sup>Note</sup> | J23, J24, K20,<br>K21, K22, K23,<br>K24                                                       | I/O | General-purpose IO | AB0_A[26:20]<br>AB0_A[10:4]                 | M    | Leave open.            |
| GIO_P[30:28] <sup>Note</sup> | L20, M20, N20                                                                                 | I/O | General-purpose IO | AB0_A[19:17]<br>NTS_DATA[2:0]<br>AB0_A[3:1] | M    | Leave open.            |
| GIO_P[27:12] <sup>Note</sup> | P22, P23, P24,<br>R20, R21, R22,<br>R23, T20, T21,<br>T22, T23, T24,<br>U20, V20, W20,<br>Y21 | I/O | General-purpose IO | AB0_AD[15:0]                                | P    | Leave open.            |
| GIO_P11 <sup>Note</sup>      | R24                                                                                           | I/O | General-purpose IO | AB0_CLK<br>NTS_CLK                          | J    | Leave open.            |
| GIO_P[10:7]                  | T5, R5, G5, F5                                                                                | I/O | General-purpose IO | NAND_CE[3:0]                                | D    | Leave open.            |
| GIO_P6                       | E5                                                                                            | I/O | General-purpose IO | NAND_RB3                                    | D    | Leave open.            |
| GIO_P5                       | E6                                                                                            | I/O | General-purpose IO | NAND_RB2<br>CAM_SCLK                        | D    | Leave open.            |
| GIO_P4                       | E7                                                                                            | I/O | General-purpose IO | NAND_RB1                                    | D    | Leave open.            |
| GIO_P[3:2]                   | D13, C13                                                                                      | I/O | General-purpose IO | –                                           | D    | Leave open.            |
| GIO_P1                       | H14                                                                                           | I/O | General-purpose IO | USB_WAKEUP<br>USB_PWR_FAULT                 | D    | Leave open.            |
| GIO_P0                       | E14                                                                                           | I/O | General-purpose IO | –                                           | D    | Leave open.            |

**Note** VIO18

**(16) MICROWIRE interface signals (VIO3)**

| Pin Name | Pin No. | I/O    | Function    | Alternate Pin Function | Type | Handling When Not Used |
|----------|---------|--------|-------------|------------------------|------|------------------------|
| MWI_SK   | B8      | Output | Clock       | SP0_CLK                | D    | Leave open.            |
| MWI_SI   | C8      | Input  | Data        | SP0_SI                 | D    | Leave open.            |
| MWI_SO   | D8      | Output | Data        | SP0_SO                 | D    | Leave open.            |
| MWI_CS   | E9      | Output | Chip select | SP0_CS0                | D    | Leave open.            |

**(17) NAND Flash interface signals (VIO3)**

| Pin Name     | Pin No.           | I/O    | Function             | Alternate Pin Function          | Type | Handling When Not Used |
|--------------|-------------------|--------|----------------------|---------------------------------|------|------------------------|
| NAND_ALE     | C3                | Output | Address latch enable | URT2_SRIN<br>GIO_P108           | D    | Leave open.            |
| NAND_CLE     | B3                | Output | Command latch enable | URT2_SOUT<br>GIO_P109           | D    | Leave open.            |
| NAND_D[7:4]  | AA2, T4<br>T3, T2 | I/O    | Data                 | SD2_DATA[3:0]<br>GIO_P[117:114] | D    | Leave open.            |
| NAND_D3      | R4                | I/O    | Data                 | SD2_CMD<br>GIO_P113             | D    | Leave open.            |
| NAND_D2      | AB2               | I/O    | Data                 | SD2_CKO<br>GIO_P112             | D    | Leave open.            |
| NAND_D1      | C4                | I/O    | Data                 | URT2_RTSB<br>GIO_P111           | D    | Leave open.            |
| NAND_D0      | D4                | I/O    | Data                 | URT2_CTSB<br>GIO_P110           | D    | Leave open.            |
| NAND_OE      | AA1               | Output | Output enable        | SD2_CK1<br>GIO_P93              | C    | Leave open.            |
| NAND_WE      | C9                | Output | Write enable         | IIC2_SCL                        | C    | Leave open.            |
| NAND_RB0     | B9                | Input  | Ready busy           | IIC2_SDA                        | C    | Leave open.            |
| NAND_RB3     | E5                | Input  | Ready busy           | GIO_P6                          | D    | Leave open.            |
| NAND_RB2     | E6                | Input  | Ready busy           | GIO_P5<br>CAM_SCLK              | D    | Leave open.            |
| NAND_RB1     | E7                | Input  | Ready busy           | GIO_P4                          | D    | Leave open.            |
| NAND_CE[3:0] | T5, R5,<br>G5, F5 | Output | Chip enable          | GIO_P[10:7]                     | D    | Leave open.            |

**(18) JTAG signals (VIO18 / VIO3)**

| Pin Name                 | Pin No. | I/O    | Function | Alternate Pin Function | Type | Handling When Not Used |
|--------------------------|---------|--------|----------|------------------------|------|------------------------|
| DEBUG_EN <sup>Note</sup> | H16     | Input  | JTAG     | –                      | J    | Leave open.            |
| JT0_TCK                  | E16     | Input  | JTAG     | –                      | C    | Leave open.            |
| JT0_TRSTB                | D17     | Input  | JTAG     | –                      | C    | Leave open.            |
| JT0_TMS                  | B16     | Input  | JTAG     | –                      | D    | Leave open.            |
| JT0_TDI                  | C16     | Input  | JTAG     | –                      | D    | Leave open.            |
| JT0_TDO                  | D16     | Output | JTAG     | –                      | D    | Leave open.            |
| JT0_RTCK                 | C17     | Output | JTAG     | –                      | D    | Leave open.            |

**Note** VIO18

**(19) Test signals (VIO18)**

| Pin Name | Pin No. | I/O   | Function                       | Alternate Pin Function | Type | Handling When Not Used |
|----------|---------|-------|--------------------------------|------------------------|------|------------------------|
| UTEST    | H17     | Input | Test pin (usually fixed to 0)  | –                      | E    | “L” level hold.        |
| TESTRSTB | E17     | Input | Asynchronous reset for testing | –                      | N    | Leave open.            |
| TRSTB    | E18     | Input | Test pin                       | –                      | M    | Leave open.            |
| TE1      | H12     | Input | Test pin                       | –                      | Q    | Leave open.            |
| TE2      | E11     | Input | Test pin                       | –                      | R    | Leave open.            |

**(20) Power supply**

| Pin Name | Pin No.                                                                                                               | I/O | Function                       | Type | Handling When Not Used |
|----------|-----------------------------------------------------------------------------------------------------------------------|-----|--------------------------------|------|------------------------|
| V        | A7, A13, A20, B7, B13, B20, E1, E2, F23, F24, L21, L22, U1, U2, U3, U4, U5, U21, U22, Y11, AA11, AC5, AC18, AD5, AD18 | –   | Core power supply (1.2 V)      | –    | –                      |
| VIO18    | A21, B21, E3, E4, L23, L24, U23, U24, AA18, AB7, AB11, AB18, AC7, AC11, AD7, AD11                                     | –   | IO power supply (1.8 V system) | –    | –                      |
| VIO3     | A14, B14, C7, C14, D7, D14, M1, M2, M3, M4, Y1, Y2, Y3, Y4                                                            | –   | IO power supply (3 V system)   | –    | –                      |
| VA1      | C11, D11                                                                                                              | –   | PLL power supply (1.2V)        | –    | –                      |
| VA2      | A10, B10                                                                                                              | –   | PLL power supply (1.2V)        | –    | –                      |
| VA3      | A12, B12                                                                                                              | –   | PLL power supply (1.2V)        | –    | –                      |
| VDDQ_DDR | G1, G2, P3, P4, P5, W1, W2                                                                                            | –   | DDR power supply (1.8V)        | –    | –                      |
| VDD_DDR  | G3, G4, H21, H22, H23, H24, N21, N22, N23, N24, P1, P2, W3, W4, W21, W22, W23, W24                                    | –   | DDR power supply (1.8V)        | –    | –                      |

**(21) GND**

| Pin Name | Pin No.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Function |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| G        | A1, A2, A3, A6, A11, A15, A19, A22, A23, A24, B1, B2, B6, B11, B15, B19, B23, B24, C1, C6, C15, C24, D6, D15, E15, F1, F2, F3, F4, F6, G21, G22, G23, G24, H11, H15, J8, J9, J10, J11, J12, J13, J14, J15, J16, J17, K8, K9, K10, K11, K12, K13, K14, K15, K16, L8, L9, L10, L11, L12, L13, L14, L15, L16, L17, M8, M9, M10, M11, M12, M13, M14, M15, M16, M17, M21, M22, M23, M24, N1, N2, N3, N4, N5, N8, N9, N10, N11, N12, N13, N14, N15, N16, N17, P8, P9, P10, P11, P12, P13, P14, P15, P16, P17, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, T8, T9, T10, T11, T14, T15, T16, T17, U8, U9, U10, U11, U17, V1, V2, V3, V4, V5, V21, V22, V23, V24, AA6, AA10, AA15, AA19, AB1, AB6, AB10, AB15, AB19, AB24, AC1, AC2, AC6, AC10, AC15, AC19, AC23, AC24, AD1, AD2, AD3, AD6, AD10, AD15, AD19, AD22, AD23, AD24 | GND      |

**(22) Other**

| Pin Name | Pin No.                                                                                                                                                                                                                                                                                                                                                    | I/O | Function                  | Type | Handling When Not Used |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---------------------------|------|------------------------|
| IC       | K17, T12, T13, U12, U13, U14, U15, U16, W5, Y5, Y6, Y7, Y8, Y9, Y10, Y12, Y13, Y14, Y15, Y16, Y17, Y18, Y19, Y20, AA3, AA4, AA5, AA7, AA8, AA9, AA12, AA13, AA14, AA16, AA17, AA20, AB3, AB4, AB5, AB8, AB9, AB12, AB13, AB14, AB16, AB17, AB20, AC3, AC4, AC8, AC9, AC12, AC13, AC14, AC16, AC17, AC20, AD4, AD8, AD9, AD12, AD13, AD14, AD17, AD16, AD20 | –   | Internally-connected pins | –    | –                      |

### 1.3 I/O Circuits

(1/4)

| Type A     | Description                                                                                                                                                                                                                                                                                                                             |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|            | <p>Input buffer Schmitt (VIO3)<br/>w / IO-Standby Control</p> <p>Other IO buffers are fixed on the time of Power OFF mode in POW OFF state of appendix D by inputting the Low level to this buffer.</p> <p><b>Remark</b> In the Power-off mode, pins remain in a Hi-Z state (input) and the signals are passed through this buffer.</p> |
| Types B, E | Description                                                                                                                                                                                                                                                                                                                             |
|            | <p>Bidirectional buffer Schmitt (type B = VIO3, type E = VIO18)<br/>w / IOLH control Normal / Pull-up 50 kΩ / Pull-down 50 kΩ</p> <ul style="list-style-type: none"> <li>During power-off: Pins remain in a Hi-Z state</li> <li>Resistance = 50 kΩ (typ.)</li> </ul>                                                                    |
| Type C     | Description                                                                                                                                                                                                                                                                                                                             |
|            | <p>Bidirectional buffer Schmitt (VIO3)<br/>w / IOLH control Normal / Pull-up 50 kΩ / Pull-down 50 kΩ</p> <ul style="list-style-type: none"> <li>During power-off: Pins remain in a Hi-Z state (masked by 0 internally)</li> <li>Resistance = 50 kΩ (typ.)</li> </ul>                                                                    |


(2/4)

| Type D  | Description                                                                                                                                                                                                                                                                                                            |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         | <p>Bidirectional buffer AND (VIO3)</p> <p>w / IOLH control Normal / Pull-up 50 kΩ / Pull-down 50 kΩ</p> <ul style="list-style-type: none"> <li>During power-off: Pins remain in a Hi-Z state (masked by 0 internally)</li> <li>Resistance = 50 kΩ (typ.)</li> </ul>                                                    |
| Types G | Description                                                                                                                                                                                                                                                                                                            |
|         | <p>Bidirectional buffer AND (VIO18)</p> <p>w / IOLH control Normal / Pull-up 50 kΩ Pull-down 50 kΩ</p> <ul style="list-style-type: none"> <li>During power-off: <ul style="list-style-type: none"> <li>Type G: Pins are pulled down (masked by 0 internally)</li> </ul> </li> <li>Resistance = 50 kΩ (typ.)</li> </ul> |
| Type J  | Description                                                                                                                                                                                                                                                                                                            |
|         | <p>Bidirectional buffer AND, Schmitt (VIO18)</p> <p>w / IOLH control Normal / Pull-up 50 kΩ / Pull-down 50 kΩ</p> <ul style="list-style-type: none"> <li>During power-off: Pins are pulled down (masked by 0 internally)</li> <li>Resistance = 50 kΩ (typ.)</li> </ul>                                                 |

(3/4)

| Types M, N | Description                                                                                                                                                                                                                                                                                                                                                                                       |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|            | <p>Bidirectional buffer Schmitt / LowNoise (VIO18)<br/>w / IOLH control Normal / Pull-up 50 kΩ / Pull-down 50 kΩ</p> <ul style="list-style-type: none"> <li>During power-off: <ul style="list-style-type: none"> <li>Type M: Pins are pulled down (masked by 0 internally)</li> <li>Type N: Pins are pulled up (masked by 0 internally)</li> </ul> </li> <li>Resistance = 50 kΩ (typ.)</li> </ul> |
| Type P     | Description                                                                                                                                                                                                                                                                                                                                                                                       |
|            | <p>Bidirectional buffer (VIO18)<br/>w / IOLH control bus holder</p> <ul style="list-style-type: none"> <li>During power-off: Pins output a low level (masked by 0 internally)</li> <li>Resistance = 6.5 kΩ (typ.)</li> </ul>                                                                                                                                                                      |
| Types Q, R | Description                                                                                                                                                                                                                                                                                                                                                                                       |
|            | <p>Test buffer (VIO18)<br/>Types Q and R are buffers used exclusively for testing.<br/>Leave open when used in the actual device. (Always pull down the pins (typ. 50 kΩ))</p>                                                                                                                                                                                                                    |

(4/4)
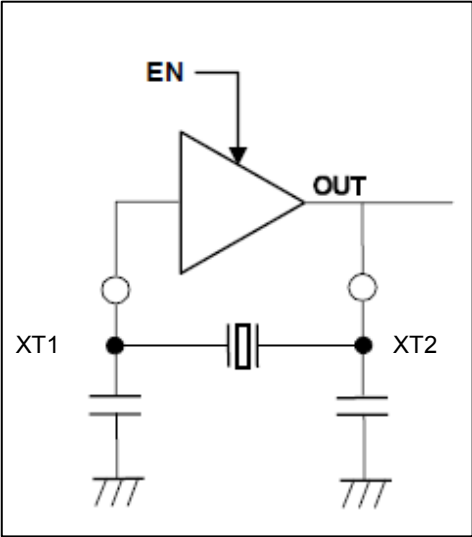
| Type Z                                                                                       | Description |
|----------------------------------------------------------------------------------------------|-------------|
| <div></div> | oscillator  |

## 2. ELECTRICAL SPECIFICATIONS

### 2.1 Absolute Maximum Ratings

| Parameter            | Symbol                                      | Conditions                | Rating                          | Unit |
|----------------------|---------------------------------------------|---------------------------|---------------------------------|------|
| Power supply voltage | V                                           | 1.2 V system              | −0.5 to +1.8                    | V    |
|                      | V <sub>IO18</sub>                           | 1.8 V system (I/O)        | −0.5 to +2.5                    | V    |
|                      | V <sub>IO3</sub>                            | 3 V system (I/O)          | −0.5 to +4.6                    | V    |
|                      | V <sub>DD_DDR</sub><br>V <sub>DDQ_DDR</sub> | Power supply for memories | −0.5 to +2.3                    | V    |
|                      |                                             |                           |                                 |      |
| Input voltage        | V <sub>I_18</sub>                           | 1.8 V system (I/O)        | −0.5 to V <sub>IO18</sub> + 0.5 | V    |
|                      | V <sub>I_33</sub>                           | 3 V system (I/O)          | −0.5 to V <sub>IO3</sub> + 0.5  | V    |
| Output voltage       | V <sub>O_18</sub>                           | 1.8 V system (I/O)        | −0.5 to V <sub>IO18</sub> + 0.5 | V    |
|                      | V <sub>O_33</sub>                           | 3 V system (I/O)          | −0.5 to V <sub>IO3</sub> + 0.5  | V    |
| Storage temperature  | T <sub>stg</sub>                            | -                         | −40 to +125                     | °C   |

**Caution** Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

**Note** Instantaneous input of a voltage in the range of −0.8 to V<sub>DD12</sub> + 0.8 V is allowed as long as capacitive coupling is implemented.

### 2.2 Recommended Operating Conditions

| Parameter                                   | Symbol                                      | Conditions                                 | MIN. | TYP. | MAX. | Unit |
|---------------------------------------------|---------------------------------------------|--------------------------------------------|------|------|------|------|
| Power supply voltage                        | V                                           | 1.2 V system, during normal operation      | 1.1  | 1.2  | 1.3  | V    |
|                                             |                                             | Memory retention voltage <sup>Note 1</sup> | 0.64 | -    | -    | V    |
|                                             | V <sub>PLL</sub>                            | 1.2 V system (PLL power supply, pin: VA)   | 1.1  | 1.2  | 1.3  | V    |
|                                             | V <sub>IO18</sub>                           | 1.8 V system (I/O power supply)            | 1.7  | 1.8  | 1.9  | V    |
|                                             | V <sub>IO3</sub>                            | 3 V system (I/O power supply)              | 2.7  | -    | 3.6  | V    |
|                                             | V <sub>DD_DDR</sub><br>V <sub>DDQ_DDR</sub> | Power supply for memories                  | 1.7  | 1.8  | 1.9  | V    |
|                                             |                                             |                                            |      |      |      |      |
| Oscillation start voltage <sup>Note 2</sup> | V <sub>OSC_S</sub>                          | -                                          | 1.7  | -    | -    | V    |
| Oscillation start voltage <sup>Note 3</sup> | V <sub>OSC_H</sub>                          | -                                          | 1.7  | -    | -    | V    |
| Operating ambient temperature               | T <sub>A</sub>                              | -                                          | −20  | -    | +70  | °C   |

- Notes**
1. This is the voltage that guarantees retention of data in the internal SRAM when the voltage drops during normal operation.
  2. This is the voltage at which oscillation always starts after power-on.
  3. This is the voltage that guarantees oscillation when the voltage drops during normal operation.

### 2.3 Capacitance

(T<sub>A</sub> = +25°C, f = 1 MHz, unmeasured pins returned to 0 V)

| Parameter          | Symbol          | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------|-----------------|------------|------|------|------|------|
| Input capacitance  | C <sub>i</sub>  | 1.8 V      | 3    | -    | 5    | pF   |
|                    |                 | 2.8 V      | 2    | -    | 4    | pF   |
| Output capacitance | C <sub>o</sub>  | 1.8 V      | 3    | -    | 5    | pF   |
|                    |                 | 2.8 V      | 2    | -    | 4    | pF   |
| I/O capacitance    | C <sub>io</sub> | 1.8 V      | 3    | -    | 5    | pF   |
|                    |                 | 2.8 V      | 2    | -    | 4    | pF   |

## 2.4 DC Characteristics

### 2.4.1 V<sub>IO18</sub>

(Unless it's designated in particular by the item after this, it'll be the standard under 2.2 recommendation operating condition. )

| Parameter                                                                             | Symbol              | Conditions                         | MIN.                            | TYP. | MAX.                     | Unit |
|---------------------------------------------------------------------------------------|---------------------|------------------------------------|---------------------------------|------|--------------------------|------|
| Output voltage, high                                                                  | V <sub>OH</sub>     | No DC load <sup>Note 1</sup>       | V <sub>IO18</sub> – 0.1         | -    | -                        | V    |
| Output voltage, low                                                                   | V <sub>OL</sub>     | No DC load <sup>Note 1</sup>       | -                               | -    | 0.1                      | V    |
| Input voltage, high                                                                   | V <sub>IH</sub>     | I/O pins and monitor pins          | 0.65 × V <sub>IO18</sub>        | -    | V <sub>IO18</sub> + 0.5  | V    |
| Input voltage, low                                                                    | V <sub>IL</sub>     | I/O pins and monitor pins          | -0.5                            | -    | 0.35 × V <sub>IO18</sub> | V    |
| Output current, high<br>V <sub>OH</sub> = V <sub>IO18</sub> – 0.4 V <sup>Note 2</sup> | I <sub>OUT_H1</sub> | 2 mA setting <sup>Note 3</sup>     | 1.7                             | -    | -                        | mA   |
|                                                                                       | I <sub>OUT_H2</sub> | 4 mA setting <sup>Note 3</sup>     | 3.7                             | -    | -                        | mA   |
|                                                                                       | I <sub>OUT_H3</sub> | 6 mA setting <sup>Note 3</sup>     | 5.7                             | -    | -                        | mA   |
|                                                                                       | I <sub>OUT_H4</sub> | 8 mA setting <sup>Note 3</sup>     | 7.7                             | -    | -                        | mA   |
|                                                                                       | I <sub>OUT_H5</sub> | 12 mA setting <sup>Note 3</sup>    | 11.0                            | -    | -                        | mA   |
| Output current, low<br>V <sub>OL</sub> = 0.4 V <sup>Note 2</sup>                      | I <sub>OUT_L1</sub> | 2 mA setting <sup>Note 3</sup>     | 1.7                             | -    | -                        | mA   |
|                                                                                       | I <sub>OUT_L2</sub> | 4 mA setting <sup>Note 3</sup>     | 3.7                             | -    | -                        | mA   |
|                                                                                       | I <sub>OUT_L3</sub> | 6 mA setting <sup>Note 3</sup>     | 5.7                             | -    | -                        | mA   |
|                                                                                       | I <sub>OUT_L4</sub> | 8 mA setting <sup>Note 3</sup>     | 7.7                             | -    | -                        | mA   |
|                                                                                       | I <sub>OUT_L5</sub> | 12 mA setting <sup>Note 3</sup>    | 11.0                            | -    | -                        | mA   |
| Hysteresis voltage                                                                    | V <sub>H</sub>      | Schmitt input                      | 0.20 × V <sub>IO18</sub>        | -    | 0.63 × V <sub>IO18</sub> | V    |
| Negative trigger voltage                                                              | V <sub>N</sub>      | Schmitt input                      | 0.53 × V <sub>IO18</sub> – 0.66 | -    | 0.35 × V <sub>IO18</sub> | V    |
| Positive trigger voltage                                                              | V <sub>P</sub>      | Schmitt input                      | 0.68 × V <sub>IO18</sub>        | -    | 0.83 × V <sub>IO18</sub> | V    |
| Input leakage current, high                                                           | I <sub>L_H</sub>    | V <sub>I</sub> = V <sub>IO18</sub> | -                               | -    | 1                        | μA   |
| Input leakage current, low                                                            | I <sub>L_L</sub>    | V <sub>I</sub> = GND               | -                               | -    | 1                        | μA   |
| Pull-up resistance                                                                    | R <sub>PU</sub>     | -                                  | 40                              | -    | 65                       | kΩ   |
| Pull-down resistance                                                                  | R <sub>PD</sub>     | -                                  | 40                              | -    | 65                       | kΩ   |
| Bus-holder hold resistance                                                            | R <sub>BH</sub>     | Bus-holder series resistance       | 5                               | -    | 11                       | kΩ   |
| Pull-up pin current                                                                   | I <sub>PU</sub>     | -                                  | -                               | -    | 50                       | μA   |
| Pull-down pin current                                                                 | I <sub>PD</sub>     | -                                  | -                               | -    | 50                       | μA   |

**Notes** 1. The parameters V<sub>OH</sub> and V<sub>OL</sub> here are the values guaranteed when there is no load when applying the DC current.

2. The parameters V<sub>OH</sub> and V<sub>OL</sub> here define the output current.

3. This is the value set to the I/O buffer output current drive switch register.

### 2.4.2 VIO3

| Parameter                                                            | Symbol        | Conditions                     | MIN.                  | TYP. | MAX.                  | Unit       |
|----------------------------------------------------------------------|---------------|--------------------------------|-----------------------|------|-----------------------|------------|
| Output voltage, high                                                 | $V_{OH}$      | No DC load <sup>Note 1</sup>   | $V_{IO3} - 0.1$       | -    | -                     | V          |
| Output voltage, low                                                  | $V_{OL}$      | No DC load <sup>Note 1</sup>   | -                     | -    | 0.1                   | V          |
| Input voltage, high                                                  | $V_{IH}$      | I/O pins and monitor pins      | 2.0                   | -    | $V_{IO3} + 0.5$       | V          |
| Input voltage, low                                                   | $V_{IL}$      | I/O pins and monitor pins      | -0.5                  | -    | 0.8                   | V          |
| Output current, high<br>$V_{OH} = V_{IO3} - 0.4$ V <sup>Note 2</sup> | $I_{OUT\_H1}$ | 2 mA setting <sup>Note 3</sup> | 1.7                   | -    | -                     | mA         |
|                                                                      | $I_{OUT\_H2}$ | 4 mA setting <sup>Note 3</sup> | 3.7                   | -    | -                     | mA         |
|                                                                      | $I_{OUT\_H3}$ | 6 mA setting <sup>Note 3</sup> | 5.7                   | -    | -                     | mA         |
|                                                                      | $I_{OUT\_H4}$ | 8 mA setting <sup>Note 3</sup> | 7.7                   | -    | -                     | mA         |
| Output current, low<br>$V_{OL} = 0.4$ V <sup>Note 2</sup>            | $I_{OUT\_L1}$ | 2 mA setting <sup>Note 3</sup> | 1.7                   | -    | -                     | mA         |
|                                                                      | $I_{OUT\_L2}$ | 4 mA setting <sup>Note 3</sup> | 3.7                   | -    | -                     | mA         |
|                                                                      | $I_{OUT\_L3}$ | 6 mA setting <sup>Note 3</sup> | 5.7                   | -    | -                     | mA         |
|                                                                      | $I_{OUT\_L4}$ | 8 mA setting <sup>Note 3</sup> | 7.7                   | -    | -                     | mA         |
| Hysteresis voltage                                                   | $V_H$         | Schmitt input                  | $0.11 \times V_{IO3}$ | -    | $0.41 \times V_{IO3}$ | V          |
| Negative trigger voltage                                             | $V_N$         | Schmitt input                  | $0.17 \times V_{IO3}$ | -    | $0.38 \times V_{IO3}$ | V          |
| Positive trigger voltage                                             | $V_P$         | Schmitt input                  | $0.54 \times V_{IO3}$ | -    | $0.65 \times V_{IO3}$ | V          |
| Input leakage current, high                                          | $I_{L\_H}$    | $V_I = V_{IO3}$                | -                     | -    | 1                     | $\mu A$    |
| Input leakage current, low                                           | $I_{L\_L}$    | $V_I = GND$                    | -                     | -    | 1                     | $\mu A$    |
| Pull-up resistance                                                   | $R_{PU}$      | 50 k $\Omega$ resistor         | 40                    | -    | 65                    | k $\Omega$ |
| Pull-down resistance                                                 | $R_{PD}$      | 50 k $\Omega$ resistor         | 40                    | -    | 65                    | k $\Omega$ |
| Pull-up pin current                                                  | $I_{PU}$      | 50 k $\Omega$ resistor         | -                     | -    | 90                    | $\mu A$    |
| Pull-down pin current                                                | $I_{PD}$      | 50 k $\Omega$ resistor         | -                     | -    | 90                    | $\mu A$    |

**Notes** 1. The parameters  $V_{OH}$  and  $V_{OL}$  here are the values guaranteed when there is no load when applying the DC current.

2.  $V_{OL} = 0.4$  V,  $V_{OH} = V_{IO3} - 0.4$  V. The parameters  $V_{OH}$  and  $V_{OL}$  here define the output current.

3. This is the value set to the output current drive switch register.

### 2.4.3 Standby state current (Logic)

( $T_A = 25^\circ C$ )

| Parameter       | Symbol         | Conditions                                              | MIN. | TYP. | MAX. | Unit    |
|-----------------|----------------|---------------------------------------------------------|------|------|------|---------|
| Standby current | $I_{DD\_L0}$   | Logic power supply L0 + L2 on, $f = 0$ Hz, $V = 0.75$ V | -    | 130  | 400  | $\mu A$ |
|                 |                | Logic power supply L0 on, $f = 0$ Hz, $V = 0.75$ V      | -    | 100  | 300  | $\mu A$ |
|                 |                | Logic power supply L0 on, $f = 0$ Hz, $V = 1.2$ V       | -    | 340  | -    | $\mu A$ |
|                 | $I_{DD\_IO18}$ | IO power supply $f = 0$ Hz, $V_{IO18} = 1.8$ V          | -    | -    | 10   | $\mu A$ |
|                 | $I_{DD\_IO3}$  | IO power supply $f = 0$ Hz, $V_{IO3} = 2.85$ V          | -    | -    | 10   | $\mu A$ |

**2.4.4 Standby state current (Mobile DDR SDRAM)**

| Parameter                                 | Symbol   | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------------------------------|----------|------------|------|------|------|------|
| Standby current<br>(Deep power-down mode) | DDR IDD7 | CKE 0.2V   | -    | -    | 10   | μ A  |


**2.4.5 Self refresh current**

| Parameter           | Symbol   | Conditions                                 | MIN. | TYP. | MAX. | Unit |
|---------------------|----------|--------------------------------------------|------|------|------|------|
| PASR = "000" (Full) | DDR IDD6 | -25°C DDR_T <sub>J</sub> +85°C<br>CKE 0.2V | -    | -    | 500  | μ A  |
| PASR = "001" (2BK)  |          |                                            | -    | -    | 400  | μ A  |
| PASR = "010" (1BK)  |          |                                            | -    | -    | 300  | μ A  |

## 2.5 AC Characteristics

### 2.5.1 AC test I/O measurement points

Figure 2-1. AC Test I/O Measurement Points

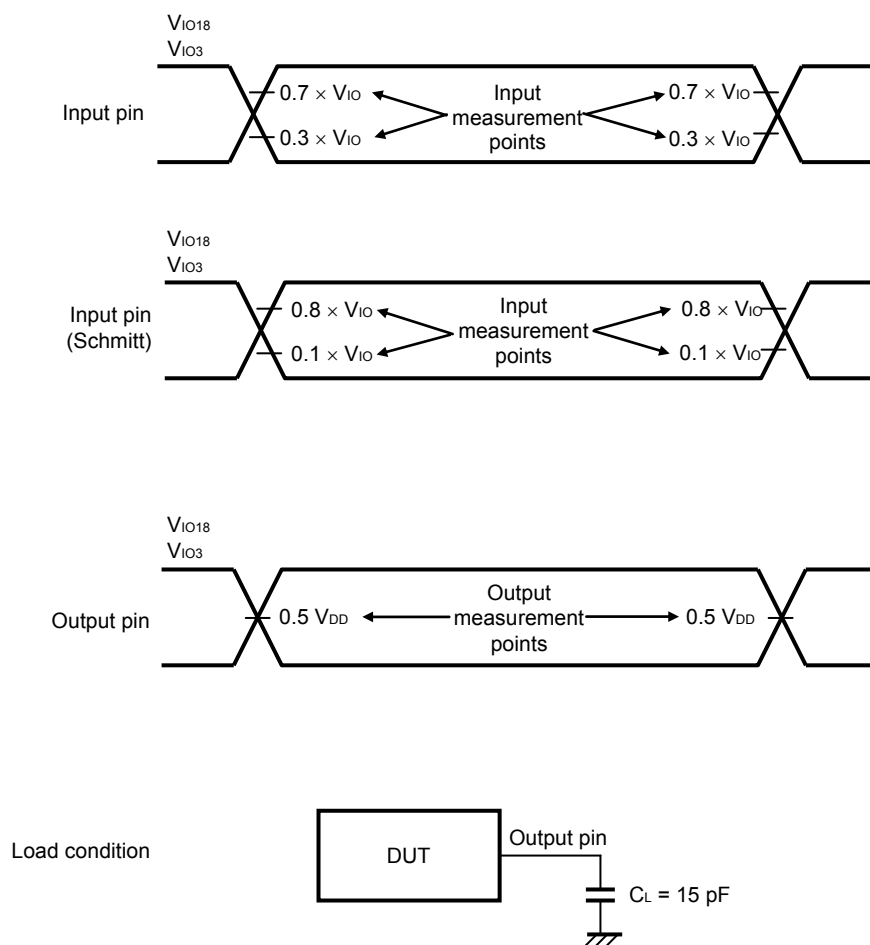

**Remark** Excluding the OSC pin. Unless specified otherwise, the load of  $C_L$  is assumed to be 15 pF. Unless it's designated in particular by the item after this, it'll be the standard under 2.2 recommendation operating condition

## 2.5.2 System control

### (1) Clock (input timing requirements)

| Parameter                       | Symbol           | Conditions                                                                                                              | MIN. | TYP.   | MAX. | Unit    |
|---------------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------|------|--------|------|---------|
| C32K frequency                  | $f_{clkC32K}$    | -                                                                                                                       | -    | 32.768 | -    | kHz     |
| C32K rise/fall time             | $t_{rC32K}$      | 10 to 90%                                                                                                               | -    | -      | 1    | $\mu s$ |
| 32 kHz input clock duty ratio   | $I_{dutyC32K}$   | -                                                                                                                       | 40   | 50     | 60   | %       |
| 32 kHz input clock jitter       | $I_{jitterC32K}$ | -                                                                                                                       | -20  | -      | 20   | ns      |
| OSC oscillation frequency range | $f_{C(OSC)}$     | Internal oscillator (OSC12M_CK1 or OSC12M_CKO)<br>(with crystal resonator DSX530GA; made by Daishinku)                  | -    | -      | 13   | MHz     |
| OSC clock stabilization time    | $t_{STAB12}$     | $C_I = C_O = 15\text{ pF}$<br>The oscillating frequency : 12MHz<br>(with crystal resonator DSX530GA; made by Daishinku) | -    | 0.5    | 1    | ms      |

Figure 2-2. Clock Timing


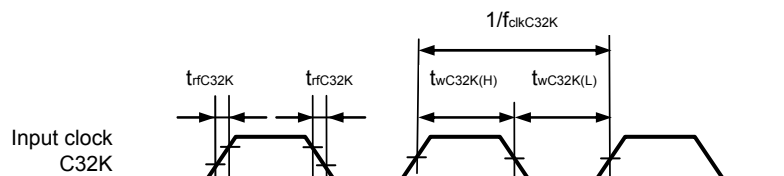


Figure 2-3. Recommended Oscillator




- Cautions**
1. Keep the wiring length between the oscillator and the OSC12M\_CK1 and OSC12M\_CKO pins as short as possible.
  2. Do not cross the wiring with the other signal lines in the area enclosed by the broken lines.
  3. Thoroughly evaluate matching of the resonator.

(2) Reset (A\_RESETB)

| Parameter                | Symbol          | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------------|-----------------|------------|------|------|------|------|
| A_RESETB low-level width | $t_{A\_RESETB}$ | -          | 6    | -    | -    | ms   |

**Remark** In the case of a hardware reset.

Figure 2-4. Reset Timing



(3) Power supply start-up Timing (without power supply -> Normal)

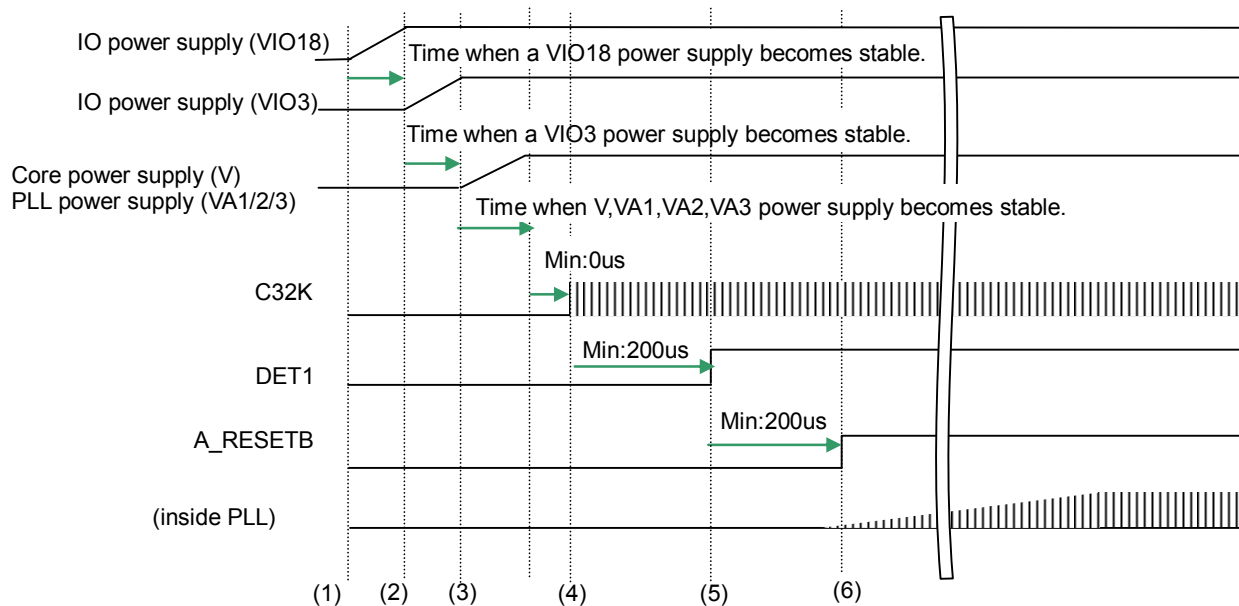


Figure 2-5. Power supply start-up timing

Remarks "Stable" means that each power supply becomes the specification minimum voltage.

The timing figure which starts from the "Without power supply".

- (1) IO power supply (VIO18) is supplied, and stands by until a power supply becomes stable.
- (2) IO power supply (VIO3) is supplied, and stands by until a power supply becomes stable.
- (3) Corepower supply (V) and PLL power supply (VA1/2/3) are supplied, and stands by until a power supply becomes stable.
- (4) RTC clock 32.768kHz (C32K) is input.
- (5) DET1 is signal is started.
- (6) A\_RESETB signal rising (reset release), and PLL begins to oscillate.

(4) Power supply start-up Timing (DeepSleep $\rightarrow$  Normal)

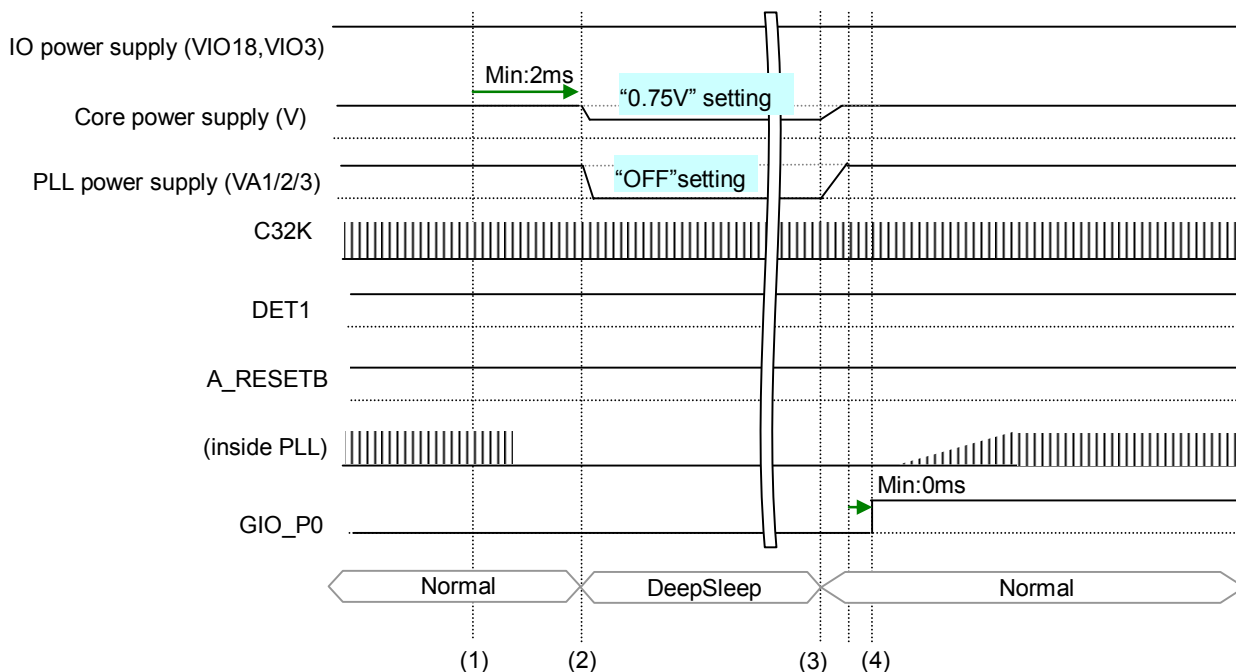


Figure 2-6. DeepSleep Normal timing

- (1) EM1-D512 sends the command to Power Management IC by SPI Interface. The contents of the command are as follows. Core power supply (V) voltage is changed to 0.75 from 1.2V. PLL power supply (VA1/2/3) is stopped.
- (2) Power Management IC changes the Core power supply (V) to 0.75V from 1.2V in at least 2 ms later and stops PLL power supply (VA1/2/3). EM1-D512 does the preparations to transfer to the DeepSleep state between (1) and (2).
- (3) Core power supply (V) voltage is changed to 1.2V from 0.75V. VPLL power supply (VA1/2/3) is supplied.
- (4) GIO\_P0 signal rising and inside PLL begins to oscillate. EM1-D512 is transit of state from DeepSleep to Normal after inside PLL stable.

(5) Power supply start-up Timing (PowerOff $\rightarrow$  Normal)

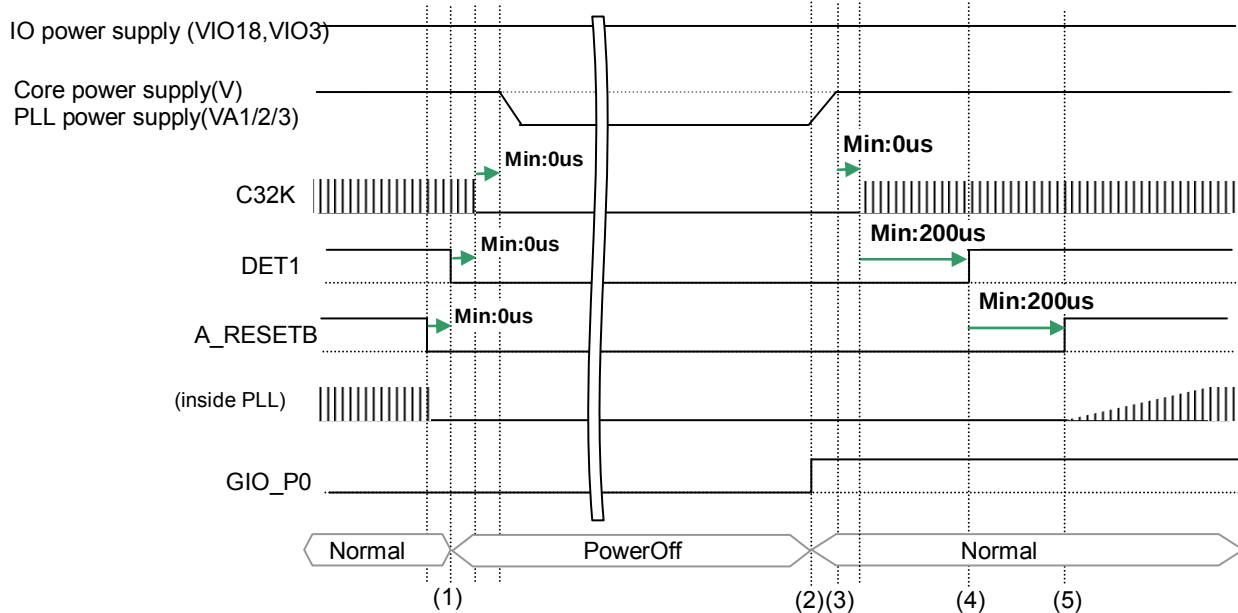


Figure 2-7. PowerOff Normal timing

- (1) A\_RESETB signal and DET1 signal are falling, and RTC clock (C32K) is stop. Next Core power supply and PLL power supply are stopped at the same time.
- (2) Core power supply (V) and PLL power supply (VA1/2/3) are supplied same time, and stand by until a power supplies become stable.
- (3) RTC clock 32.768kHz (C32K) is input.  
GIO\_P0 signal rising. It's to make EM1-D512 recognizes that it's different from "Without power supply".
- (4) DET1 is signal is started.
- (5) A\_RESETB signal rising (reset release), and inside PLL begins to oscillate.

### 2.5.3 Asynchronous bus (AB0) interface

| Parameter                                         | Symbol           | Conditions                              | MIN.                                 | TYP. | MAX.                                 | Unit |
|---------------------------------------------------|------------------|-----------------------------------------|--------------------------------------|------|--------------------------------------|------|
| Asynchronous single read access time              | t <sub>201</sub> | <b>Note</b>                             | $(1 + T0 + T1 + T2) \times Tf - 3$   | -    | $(2 + T0 + T1 + T2) \times Tf + 3$   | ns   |
| CSZ rise to ADVZ fall                             | t <sub>202</sub> | <b>Note</b>                             | $Tf - 3$                             | -    | $2Tf + 3$                            | ns   |
| ADVZ active width                                 | t <sub>203</sub> | AB0_ADVZ = Low                          | $Tf - 3$                             | -    | $Tf + 3$                             | ns   |
| Lower ADD for ADMUX hold time                     | t <sub>204</sub> | -                                       | $T0 \times Tf - 3$                   | -    | $T0 \times Tf + 3$                   | ns   |
| Delay time from ADVZ rise to read signal output   | t <sub>205</sub> | Falling edge of AB0_RDZ                 | $T0 \times Tf - 3$                   | -    | $T0 \times Tf + 3$                   | ns   |
| Read signal active width                          | t <sub>206</sub> | AB0_RDZ = Low                           | $T1 \times Tf - 3$                   | -    | $T1 \times Tf + 3$                   | ns   |
| Delay time from RDZ rise to CSZ fall output       | t <sub>207</sub> | Rising edge of AB0_RDZ                  | $T2 \times Tf - 3$                   | -    | $T2 \times Tf + 3$                   | ns   |
| CS assert interval time                           | t <sub>208</sub> | -                                       | $CSInt \times Tf - 3$                | -    | -                                    | ns   |
| Asynchronous _RDATA setup time                    | t <sub>209</sub> | Rising edge of AB0_RDZ                  | 15                                   | -    | -                                    | ns   |
| Asynchronous _RDATA hold time                     | t <sub>210</sub> | Rising edge of AB0_RDZ                  | 0                                    | -    | -                                    | ns   |
| Delay time from address determination to RDZ fall | t <sub>211</sub> | Falling edge of AB0_RDZ <sup>Note</sup> | $(1 + T0) \times Tf - 8$             | -    | -                                    | ns   |
| Delay time from CSZ fall to RDZ rise output       | t <sub>212</sub> | Falling edge of AB0_RDZ <sup>Note</sup> | $(1 + T0) \times Tf - 3$             | -    | -                                    | ns   |
| Asynchronous single write access time             | t <sub>220</sub> | <b>Note</b>                             | $(1 + T0 + T1w + T2w) \times Tf - 3$ | -    | $(2 + T0 + T1w + T2w) \times Tf + 3$ | ns   |
| Delay time from ADVZ rise to write signal output  | t <sub>221</sub> | Rising edge of AB0_WRZ                  | $T0 \times Tf - 3$                   | -    | $T0 \times Tf + 3$                   | ns   |
| Write signal active width                         | t <sub>222</sub> | AB0_WRZ = Low                           | $T1w \times Tf - 3$                  | -    | $T1w \times Tf + 3$                  | ns   |
| Delay time from WRZ rise to CSZ fall output       | t <sub>223</sub> | Rising edge of AB0_WRZ                  | $T2w \times Tf - 3$                  | -    | $T2w \times Tf + 3$                  | ns   |
| Asynchronous _WDATA output hold time              | t <sub>224</sub> | Rising edge of AB0_WRZ                  | $T2w \times Tf - 8$                  | -    | -                                    | ns   |
| Delay time from address determination to WRZ fall | t <sub>225</sub> | Falling edge of AB0_WRZ <sup>Note</sup> | $(1 + T0) \times Tf - 8$             | -    | -                                    | ns   |
| Delay time from CSZ fall to WRZ fall output       | t <sub>226</sub> | Falling edge of AB0_WRZ <sup>Note</sup> | $(1 + T0) \times Tf - 3$             | -    | -                                    | ns   |

**Note** The time from the CSB falling edge to the ADV falling edge (Tf) can be shortened by setting a register.

**Remark** Tf = 1/4 of AB0\_CLK. (When frequency ratio 1/4 is usually the time of the state (AB0\_CLK:FLASH\_CLK = 2:1).

T0, T1, T2, CSInt: Values set to read the wait timing control register (AB0\_CSxWAITCTRL)

T1w, T2w: Values set to write the wait timing control register (AB0\_CSxWAITCTRL\_W)

Figure 2-8. Asynchronous Single Read Timing


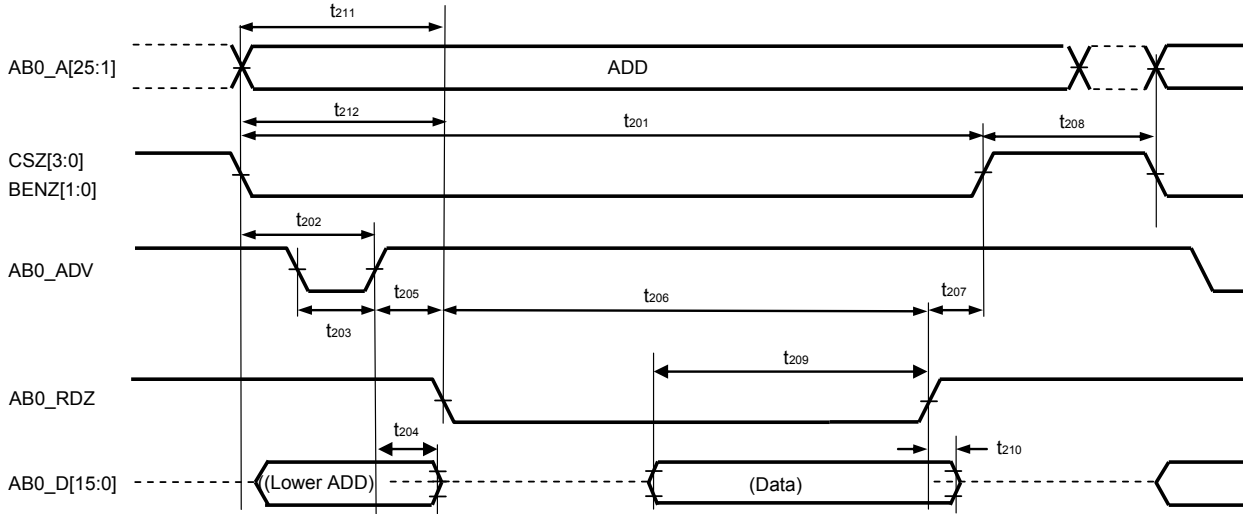


Figure 2-9. Asynchronous Single Write Timing

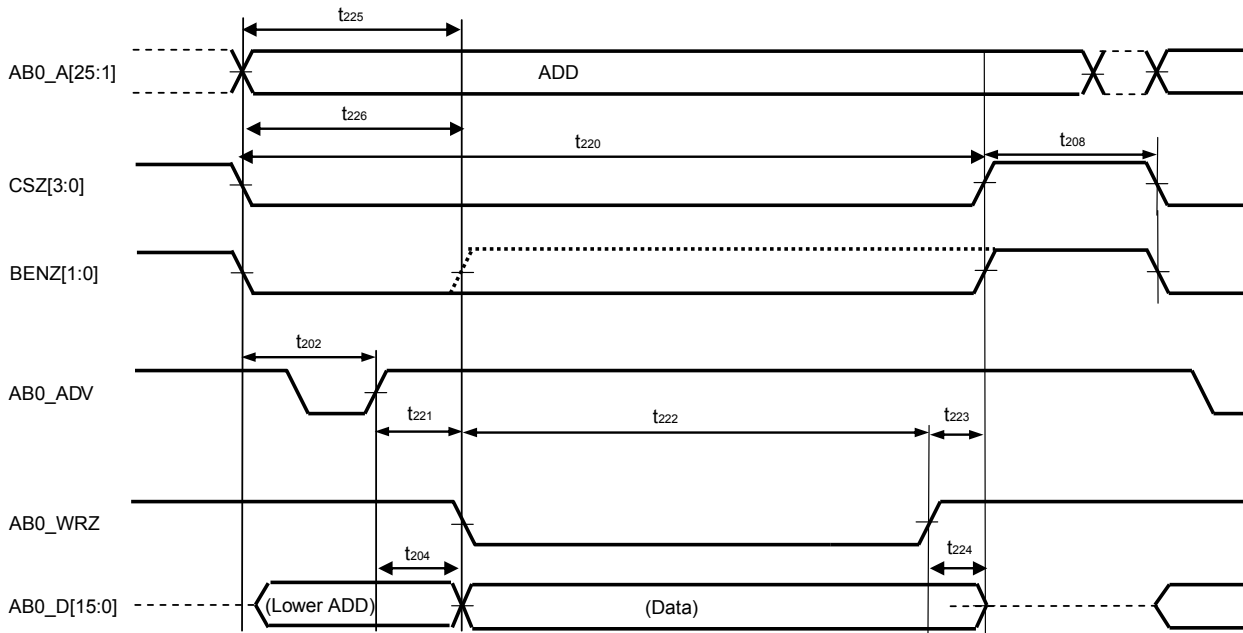


## 2.5.4 UART interface

(IO buffer drive capability: 2 mA)

| Parameter                    | Symbol   | Conditions                    | MIN. | TYP. | MAX. | Unit |
|------------------------------|----------|-------------------------------|------|------|------|------|
| UARTx_SOUT output delay time | $t_{DC}$ | Falling edge of UARTx_CTSB    | -    | -    | 4    | RCLK |
| UARTx_RTSB output delay time | $t_{DR}$ | Center of UARTx_SRIN stop bit | -    | -    | 3    | RCLK |

**Remark** RCLK: 1/16 of baud rate clock cycle

**Figure 2-10. UART Interface Timing**

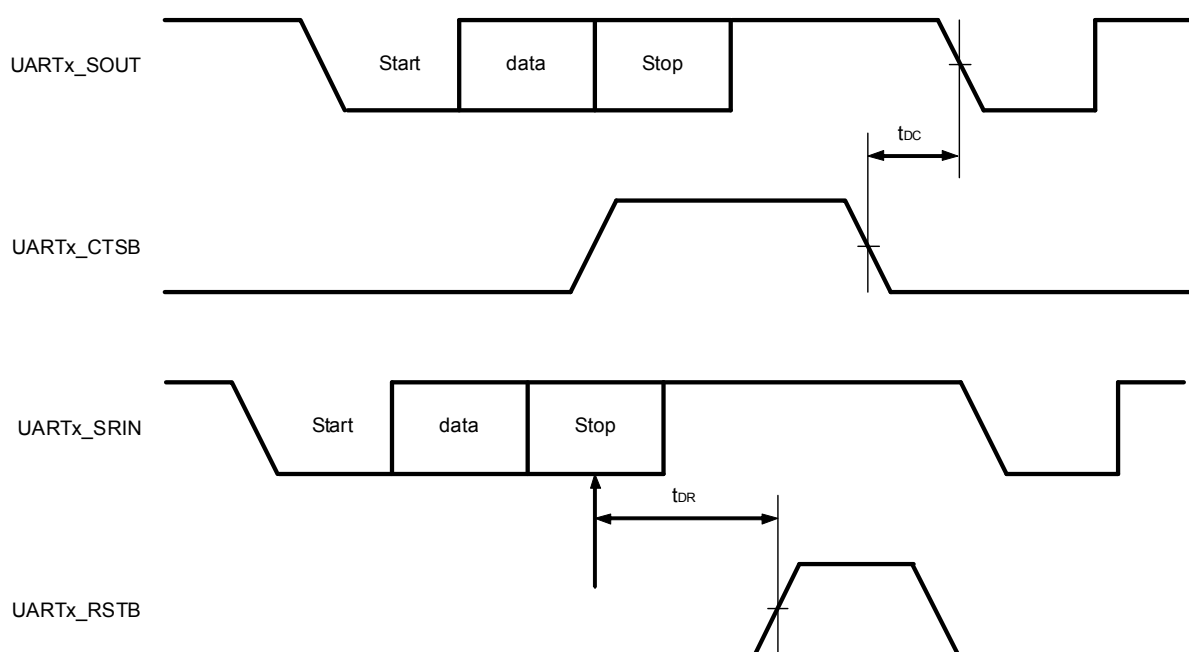

**Remark** x = 0 to 2 (UARTx\_CTSB and UARTx\_RTSB for UART0 and UART2 are pins and are not provided for UART1.)

## 2.5.5 IIC interface

(IO buffer drive capability: 2 mA)

| Parameter                             | Symbol           | Conditions                                 | Standard Mode <sup>Note 1</sup> |      | High-Speed Mode <sup>Note 1</sup> |                       | Unit |
|---------------------------------------|------------------|--------------------------------------------|---------------------------------|------|-----------------------------------|-----------------------|------|
|                                       |                  |                                            | MIN.                            | MAX. | MIN.                              | MAX.                  |      |
| IIC_SCL clock frequency               | f <sub>C</sub>   | -                                          | 0                               | 70   | 0                                 | 341                   | kHz  |
| IIC bus free time                     | t <sub>BF</sub>  | Interval between stop and start conditions | 4.7                             | —    | 1.3                               | —                     | μs   |
| IIC hold time <sup>Note 2</sup>       | t <sub>H1</sub>  | -                                          | 4.0                             | —    | 0.6                               | —                     | μs   |
| IIC hold time (SCL clock)             | t <sub>WL</sub>  | "Low" state                                | 4.7                             | —    | 1.3                               | —                     | μs   |
|                                       | t <sub>WH</sub>  | "Hi" state                                 | 4.0                             | —    | 0.6                               | —                     | μs   |
| IIC setup time                        | t <sub>SU1</sub> | Start condition<br>Restart condition       | 4.7                             | —    | 0.6                               | —                     | μs   |
| IIC data setup time                   | t <sub>SU2</sub> | -                                          | 250                             | —    | 100 <sup>Note 3</sup>             | —                     | ns   |
| IIC rise time                         | t <sub>R</sub>   | SDA and SCL signals                        | —                               | —    | —                                 | 300 <sup>Note 4</sup> | ns   |
| IIC fall time                         | t <sub>F</sub>   | SDA and SCL signals                        | —                               | —    | —                                 | 300 <sup>Note 4</sup> | ns   |
| IIC setup time                        | t <sub>SU3</sub> | Stop condition                             | 4.0                             | —    | 0.6                               | —                     | μs   |
| IIC data hold time                    | t <sub>H2</sub>  | Clock fall output                          | 5.0                             | —    | —                                 | —                     | μs   |
|                                       |                  | Clock fall input                           | 0                               | 3.45 | 0 <sup>Note 5</sup>               | 0.9 <sup>Note 6</sup> | μs   |
| Capacitance load of each IIC bus line | C <sub>b</sub>   | -                                          | —                               | 400  | —                                 | 400                   | pF   |

**Notes** 1. Select the standard mode or high-speed mode by using the SMC0 bit of the IIC0 clock select register (IICCL0).

2. At the start condition, the first clock pulse is generated after the hold time.

3. The high-speed mode I<sup>2</sup>C bus can be used in the standard-mode I<sup>2</sup>C bus system. In this case, set the high-speed mode I<sup>2</sup>C bus so that it meets the following conditions.


- If the system does not extend the IIC\_SCL signal's low state hold time: t<sub>SU2</sub> ≥ 250 ns

4. Do not input noise exceeding the hysteresis width of the 1.8 V system IO Schmitt buffer during a rise or fall time.

5. The system requires a minimum of 300 ns hold time internally for the SDA signal (at V<sub>IH</sub> (MIN.) [0.7 V<sub>DD2</sub>] of IIC\_SCL signal) in order to occupy the undefined area at the falling edge of IIC\_SCL.

6. If the system does not extend the IIC\_SCL signal low hold time (t<sub>WL</sub>), only the maximum data hold time (t<sub>H2</sub>) needs to be satisfied.

Figure 2-11. IIC Bus Interface Timing

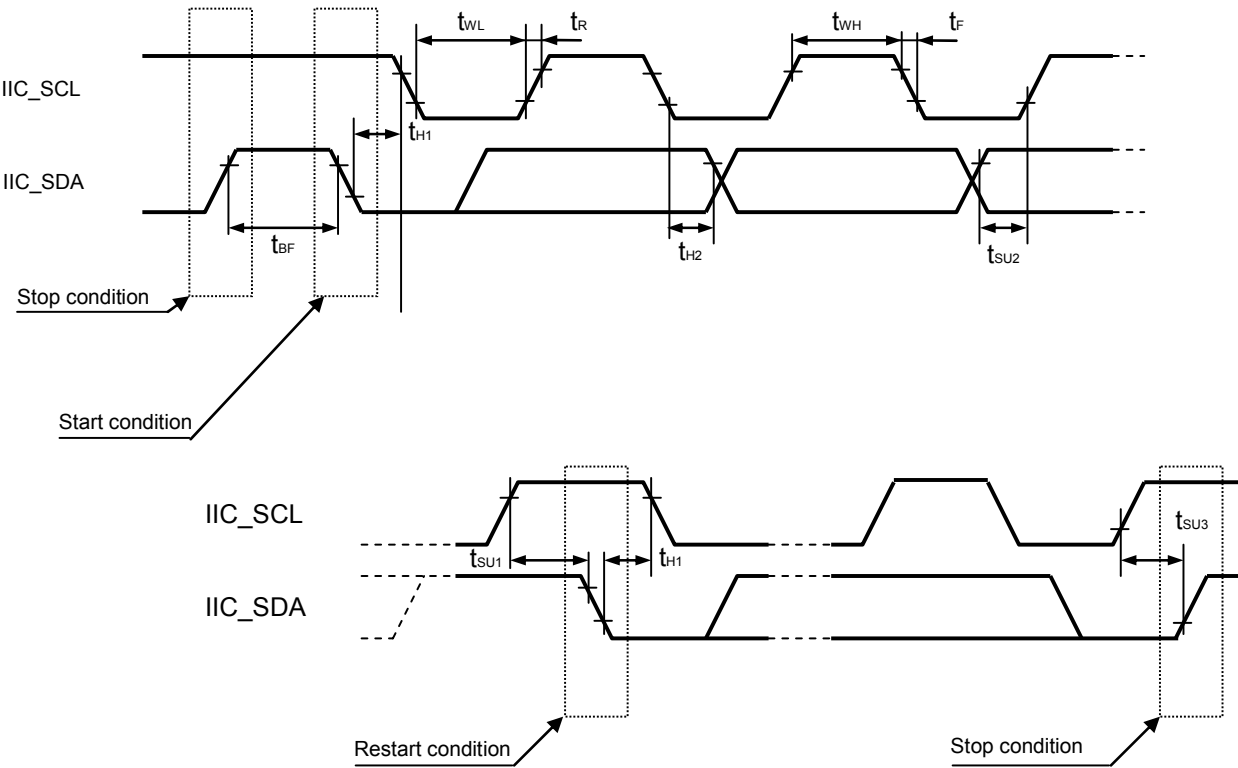


## 2.5.6 Audio/Voice interface

### (1) Slave mode

| Parameter                  | Symbol   | Conditions                          | MIN. | TYP. | MAX. | Unit |
|----------------------------|----------|-------------------------------------|------|------|------|------|
| PMx_CLK cycle time         | $t_c$    | -                                   | 100  | -    | -    | ns   |
| PMx_CLK high-level width   | $t_{WH}$ | -                                   | 40   | -    | -    | ns   |
| PMx_CLK low-level width    | $t_{WL}$ | -                                   | 40   | -    | -    | ns   |
| Clock rise time            | $t_R$    | -                                   | -    | -    | 10   | ns   |
| Clock fall time            | $t_F$    | -                                   | -    | -    | 10   | ns   |
| PMx_SI, PMx_SEN setup time | $t_{SU}$ | Rising and falling edges of PMx_CLK | 20   | -    | -    | ns   |
| PMx_SI, PMx_SEN hold time  | $t_H$    | Rising and falling edges of PMx_CLK | 20   | -    | -    | ns   |
| PMx_SO output delay time   | $t_D$    | Rising and falling edges of PMx_CLK | 0    | -    | 20   | ns   |

**Remark** Time from the valid edge  
x = 0, 1

Figure 2-12. Audio/Voice Interface Timing (Slave Mode)

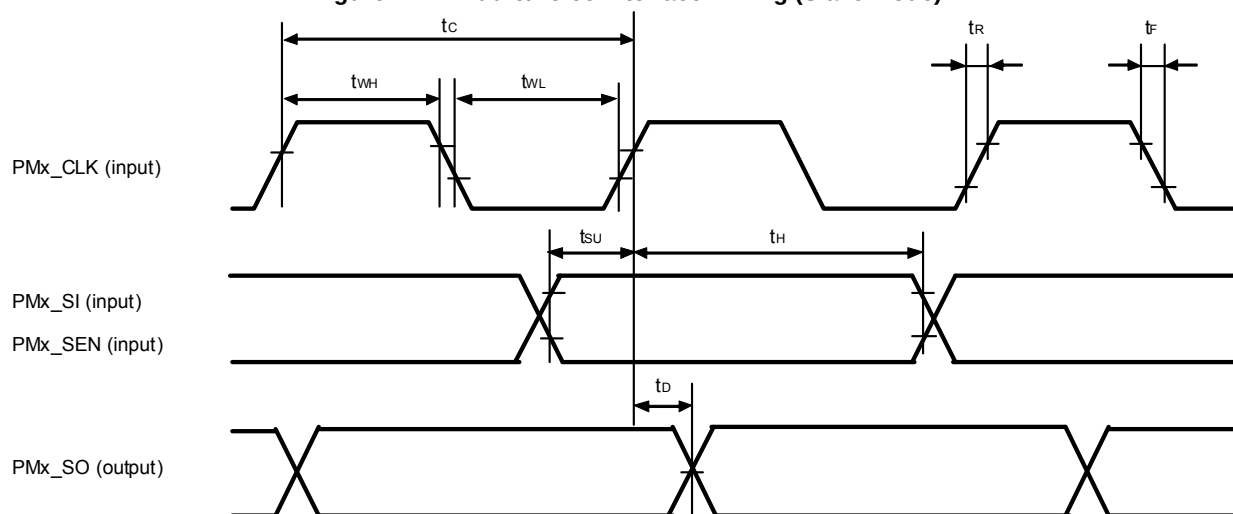


(2) Master mode

| Parameter                         | Symbol   | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------------------------------|----------|------------|------|------|------|------|
| PM0_CLK cycle time                | $t_c$    | -          | 100  | -    | -    | ns   |
| PM0_CLK high-level width          | $t_{WH}$ | -          | 40   | -    | -    | ns   |
| PM0_CLK low-level width           | $t_{WL}$ | -          | 40   | -    | -    | ns   |
| Clock rise time                   | $t_R$    | -          | -    | -    | 10   | ns   |
| Clock fall time                   | $t_F$    | -          | -    | -    | 10   | ns   |
| PMx_SI setup time                 | $t_{SU}$ | -          | 20   | -    | -    | ns   |
| PM0_SI hold time                  | $t_H$    | -          | 20   | -    | -    | ns   |
| PM0_SO, PM0_SEN output delay time | $t_D$    | -          | -5   | -    | 20   | ns   |

**Remark** Time from the valid edge  
x = 0, 1


Figure 2-13. Audio/Voice Interface Timing (Master Mode)

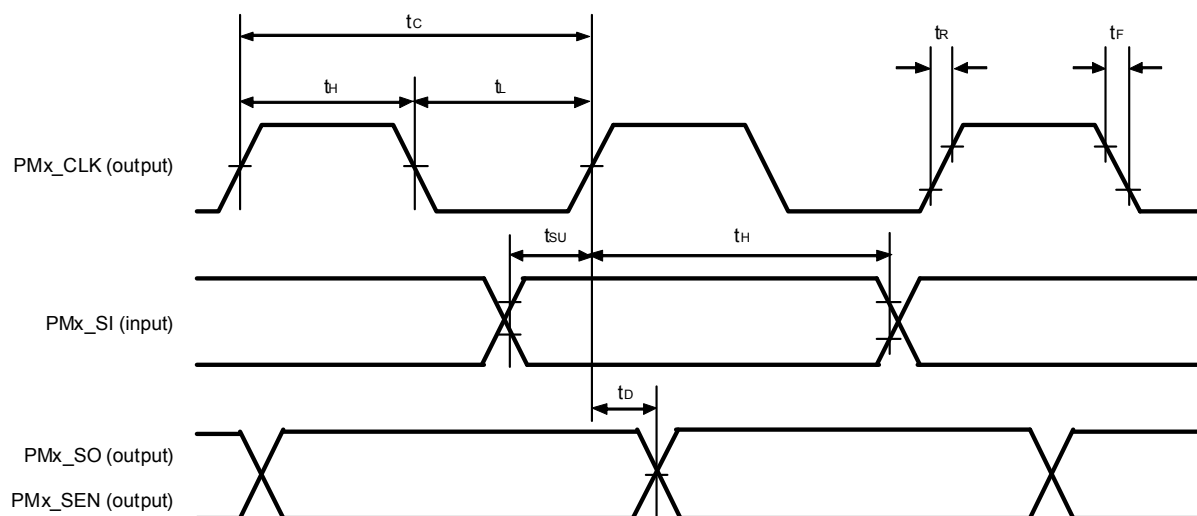

## 2.5.7 SDIO interface

| Parameter                     | Symbol      | Conditions | SD0 (SDIA), SD1 (SDIB), SD2 (SDIC) |      |      |      |
|-------------------------------|-------------|------------|------------------------------------|------|------|------|
|                               |             |            | MIN.                               | TYP. | MAX. | Unit |
| Clock cycle                   | $T_{cyc}$   | -          | 24.0                               | -    | -    | ns   |
| Output clock high-level width | $T_{hwco}$  | -          | 11.5                               | -    | -    | ns   |
| Output clock low-level width  | $T_{lwco}$  | -          | 11.5                               | -    | -    | ns   |
| Output delay                  | $T_{od}$    | -          | -                                  | -    | 2    | ns   |
| Input clock high-level width  | $T_{hwki}$  | -          | 7.5                                | -    | -    | ns   |
| Input clock low-level width   | $T_{lwki}$  | -          | 7.5                                | -    | -    | ns   |
| Input clock delay time        | $T_{dcki}$  | -          | -                                  | -    | 6    | ns   |
| Setup time                    | $T_{iscki}$ | -          | 3.5                                | -    | -    | ns   |
| Hold time                     | $T_{ihcki}$ | -          | 0                                  | -    | -    | ns   |

Figure 2-14. SDIO Interface Timing

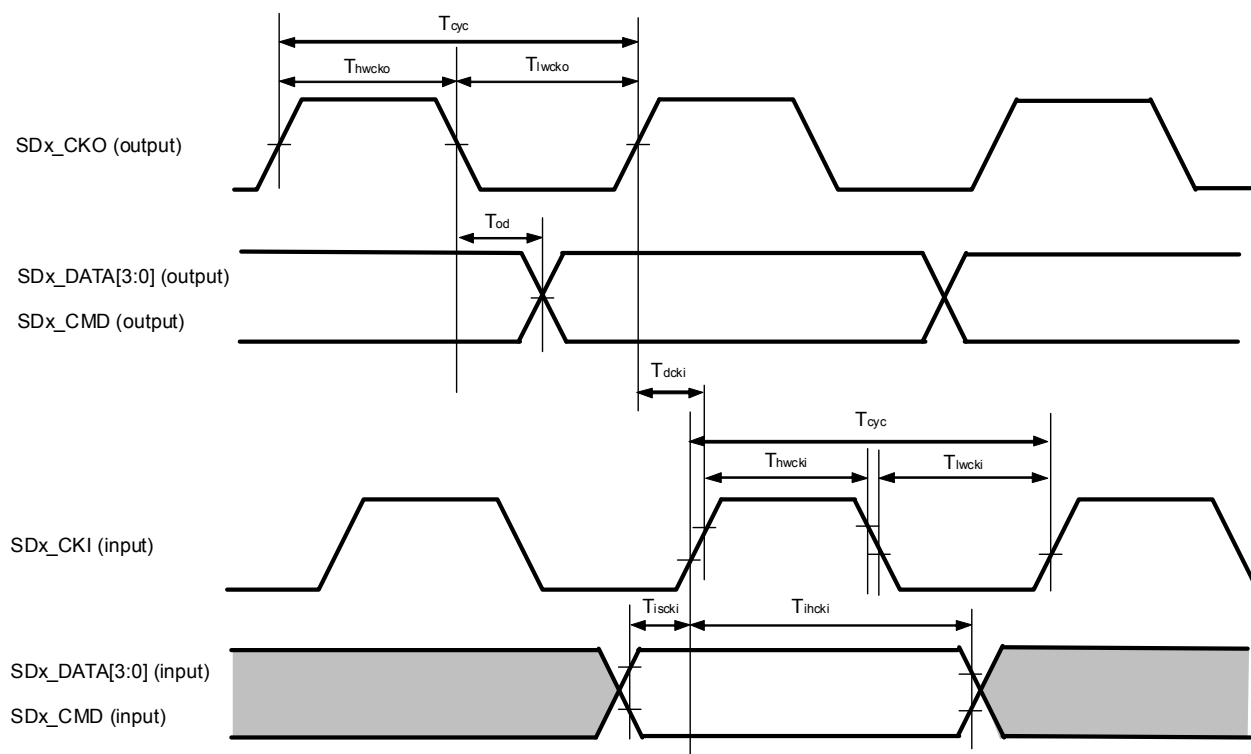


**Remark** x = 0 to 2

## 2.5.8 Camera interface

| Parameter                               | Symbol    | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------------------------------------|-----------|------------|------|------|------|------|
| CAM_CLKI input cycle                    | $t_c$     | -          | 12.5 | -    | -    | ns   |
| CAM_CLKI high-level width               | $t_{WH}$  | -          | 4    | -    | -    | ns   |
| CAM_CLKI low-level width                | $t_{WL}$  | -          | 4    | -    | -    | ns   |
| CAM_YUV[7:0], CAM_HS, CAM_VS setup time | $t_{SU0}$ | DET = 0    | 5    | -    | -    | ns   |
| CAM_YUV[7:0], CAM_HS, CAM_VS hold time  | $t_{H0}$  | DET = 0    | 0    | -    | -    | ns   |
| CAM_YUV[7:0], CAM_HS, CAM_VS setup time | $t_{SU1}$ | DET = 1    | 5    | -    | -    | ns   |
| CAM_YUV[7:0], CAM_HS, CAM_VS hold time  | $t_{H1}$  | DET = 1    | 1    | -    | -    | ns   |

Figure 2-15. Camera Interface Timing

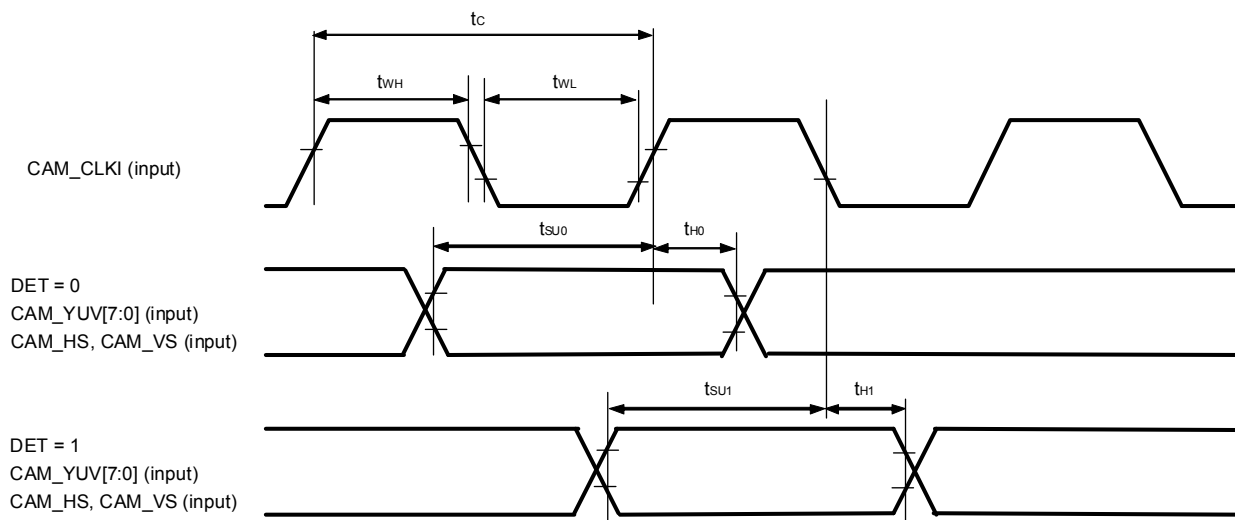


### 2.5.9 LCD interface

| Parameter                  | Symbol   | Conditions                            | MIN. | TYP. | MAX. | Unit |
|----------------------------|----------|---------------------------------------|------|------|------|------|
| LCD_PXCLK cycle            | $t_c$    | -                                     | 30   | -    | -    | ns   |
| LCD_PXCLK high-level width | $t_{WH}$ | -                                     | 12   | -    | -    | ns   |
| LCD_PXCLK low-level width  | $t_{WL}$ | -                                     | 12   | -    | -    | ns   |
| LCD_PXCLK rise time        | $t_R$    | 20 to 80%                             | -    | -    | 5    | ns   |
| LCD_PXCLK fall time        | $t_F$    | 80 to 20%                             | -    | -    | 5    | ns   |
| Data delay time            | $t_{D1}$ | LCD_R[5:0], LCD_G[5:0],<br>LCD_B[5:0] | 0    | -    | 10   | ns   |
|                            | $t_{D2}$ | LCD_VSYNC, CD_HSYNC,<br>LCD_ENABLE    | 0    | -    | 10   | ns   |

**Remark** The setting of the rise and fall timing for LCD\_PXCLK is based on the valid edge set by the CLKPOL value in the LCD control register (rising: CLKPOL = 0, falling: CLKPOL = 1).


Figure 2-16. LCD Interface Timing

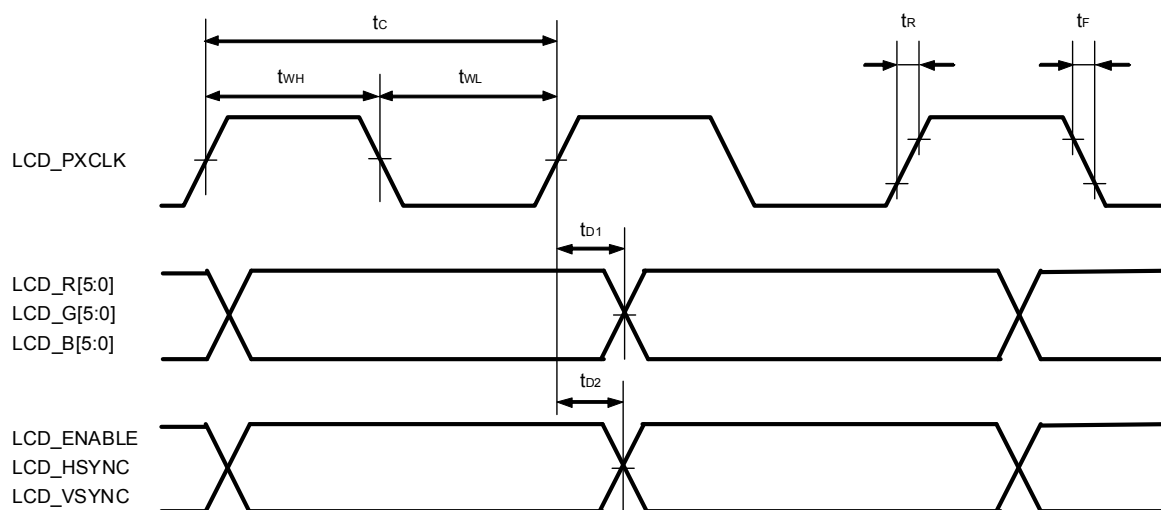

## 2.5.10 USB interface

| Parameter                    | Symbol    | Conditions | MIN. | TYP. | MAX. | Unit |
|------------------------------|-----------|------------|------|------|------|------|
| USB_CLK cycle                | $t_{k01}$ | 60 MHz     | -    | 16.7 | -    | ns   |
| USB_CLK high-level width     | $t_{k02}$ | -          | 7    | -    | -    | ns   |
| USB_CLK low-level width      | $t_{k03}$ | -          | 7    | -    | -    | ns   |
| USB_CLK rise time            | $t_{k04}$ | -          | -    | -    | 2    | ns   |
| USB_CLK fall time            | $t_{k05}$ | -          | -    | -    | 2    | ns   |
| USB control input setup time | $t_{k06}$ | -          | 5    | -    | -    | ns   |
| USB control input hold time  | $t_{k07}$ | -          | 1    | -    | -    | ns   |
| USB data input setup time    | $t_{k08}$ | -          | 5    | -    | -    | ns   |
| USB data input hold time     | $t_{k09}$ | -          | 1    | -    | -    | ns   |
| USB data output delay time   | $t_{k11}$ | -          | 0.5  | -    | 7    | ns   |
| USB_STP output delay time    | $t_{k10}$ | -          | 1    | -    | 9    | ns   |

Figure 2-17. USB Interface Timing

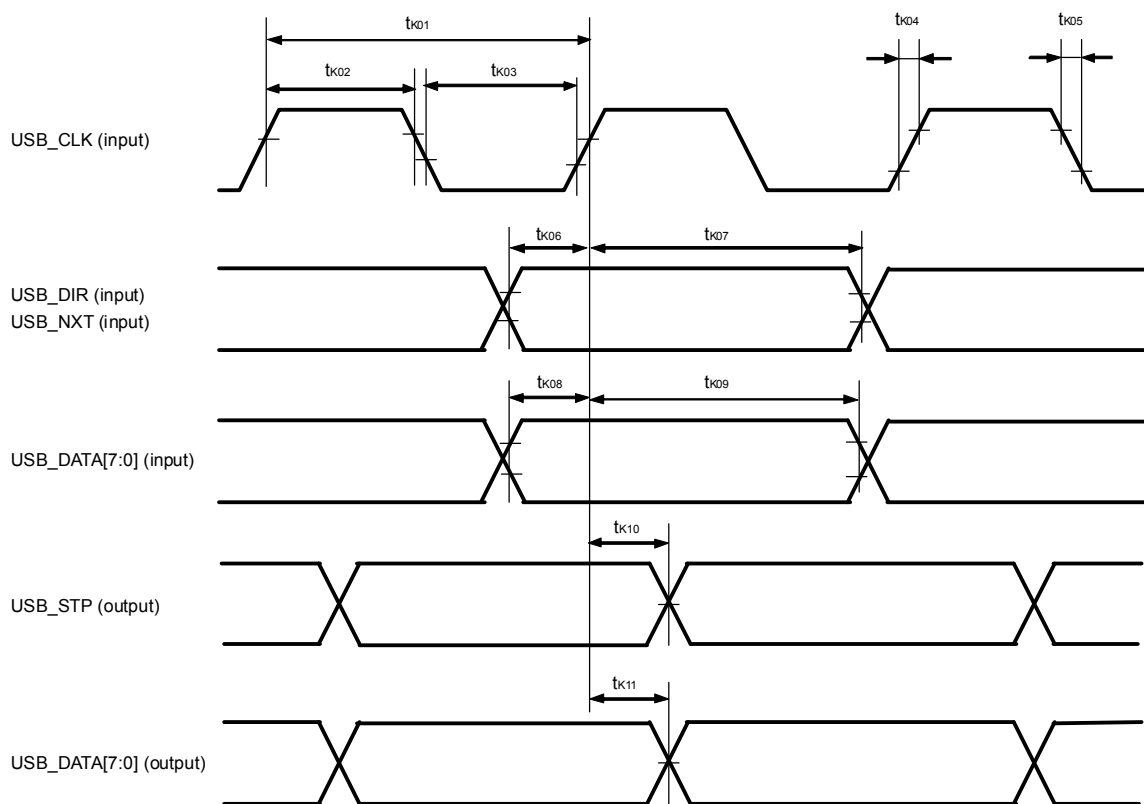


## 2.5.11 SPI interface

### (1) Master mode

| Parameter                   | Symbol           | Conditions                          | MIN. | TYP. | MAX. | Unit |
|-----------------------------|------------------|-------------------------------------|------|------|------|------|
| Common to SP0, SP1, and SP2 |                  |                                     |      |      |      |      |
| SPx_CLK output cycle        | t <sub>c</sub>   | -                                   | 40   | -    | -    | ns   |
| SPx_CLK high-level width    | t <sub>WH</sub>  | -                                   | 16   | -    | -    | ns   |
| SPx_CLK low-level width     | t <sub>WL</sub>  | -                                   | 16   | -    | -    | ns   |
| SPx_CLK rise time           | t <sub>R</sub>   | 20 to 80%                           |      | -    | 4    | ns   |
| SPx_CLK fall time           | t <sub>F</sub>   | 80 to 20%                           |      | -    | 4    | ns   |
| SP0                         |                  |                                     |      |      |      |      |
| SP0_SI setup time           | t <sub>SU0</sub> | Rising and falling edges of SP0_CLK | 12   | -    | -    | ns   |
| SP0_SI hold time            | t <sub>H0</sub>  | Rising and falling edges of SP0_CLK | 0    | -    | -    | ns   |
| SP0_SO delay time           | t <sub>DO0</sub> | Rising and falling edges of SP0_CLK | 0    | -    | 12   | ns   |
| SP1                         |                  |                                     |      |      |      |      |
| SP1_SI setup time           | t <sub>SU1</sub> | Rising and falling edges of SP1_CLK | 12   | -    | -    | ns   |
| SP1_SI hold time            | t <sub>H1</sub>  | Rising and falling edges of SP1_CLK | 0    | -    | -    | ns   |
| SP1_SO delay time           | t <sub>DO1</sub> | Rising and falling edges of SP1_CLK | 0    | -    | 12   | ns   |
| SP2                         |                  |                                     |      |      |      |      |
| SP2_SI setup time           | t <sub>SU2</sub> | Rising and falling edges of SP2_CLK | 12   | -    | -    | ns   |
| SP2_SI hold time            | t <sub>H2</sub>  | Rising and falling edges of SP2_CLK | 0    | -    | -    | ns   |
| SP2_SO delay time           | t <sub>DO2</sub> | Rising and falling edges of SP2_CLK | 0    | -    | 12   | ns   |

Figure 2-18. SPI Interface Timing (Master Mode)

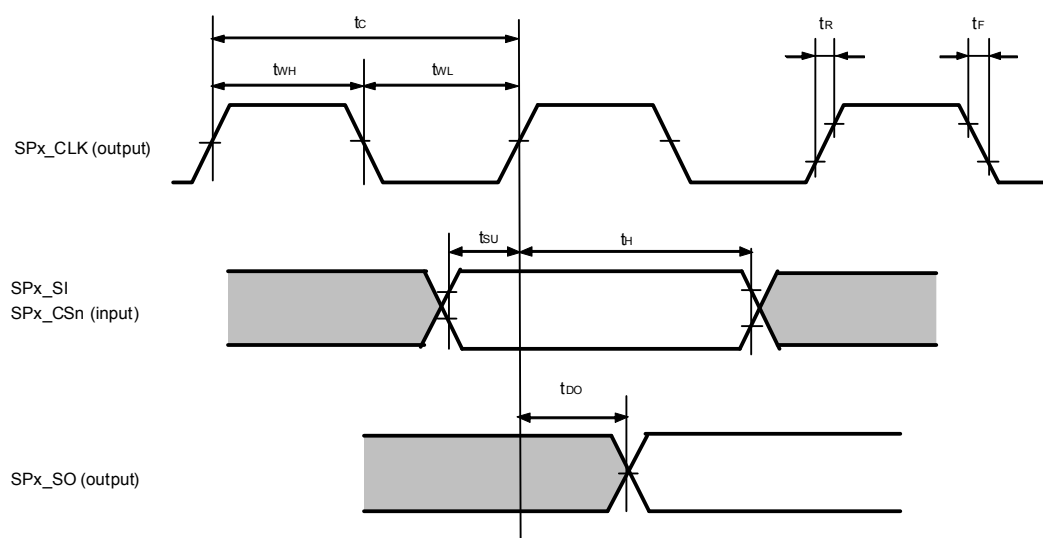


- Remarks**
1. The level of the SPx\_CLK output can be inverted by setting a register.
  2. SPx\_CLK is not output while SPx\_CLK is inactive. (Fixed to inactive.)
  3. If the read latency of the connected device is long, the time can be adjusted by means such as using a function to switch the I/O phase of SI and SO (by using the rise and fall of SCLK).

(2) Slave mode

| Parameter                | Symbol    | Conditions                          | MIN. | TYP. | MAX. | Unit |
|--------------------------|-----------|-------------------------------------|------|------|------|------|
| Common to SP0, SP1, SP2  |           |                                     |      |      |      |      |
| SPx_CLK input cycle      | $t_c$     | -                                   | 50   | -    | -    | ns   |
| SPx_CLK high-level width | $t_{WH}$  | -                                   | 20   | -    | -    | ns   |
| SPx_CLK low-level width  | $t_{WL}$  | -                                   | 20   | -    | -    | ns   |
| SPx_CLK rise time        | $t_R$     | -                                   | -    | -    | 4    | ns   |
| SPx_CLK fall time        | $t_F$     | -                                   | -    | -    | 4    | ns   |
| SP0                      |           |                                     |      |      |      |      |
| SP0_CS setup time        | $t_{SU0}$ | Rising and falling edges of SP0_CLK | 5    | -    | -    | ns   |
| SP0_CS hold time         | $t_{H0}$  | Rising and falling edges of SP0_CLK | 15   | -    | -    | ns   |
| SP0_SO delay time        | $t_{DO0}$ | Rising and falling edges of SP0_CLK | 3    | -    | 18   | ns   |
| SP1                      |           |                                     |      |      |      |      |
| SP1_CS setup time        | $t_{SU1}$ | Rising and falling edges of SP1_CLK | 5    | -    | -    | ns   |
| SP1_CS hold time         | $t_{H1}$  | Rising and falling edges of SP1_CLK | 15   | -    | -    | ns   |
| SP1_SO delay time        | $t_{DO1}$ | Rising and falling edges of SP1_CLK | 3    | -    | 20   | ns   |
| SP2                      |           |                                     |      |      |      |      |
| SP2_CS setup time        | $t_{SU2}$ | Rising and falling edges of SP2_CLK | 5    | -    | -    | ns   |
| SP2_CS hold time         | $t_{H2}$  | Rising and falling edges of SP2_CLK | 15   | -    | -    | ns   |
| SP2_SO delay time        | $t_{DO2}$ | Rising and falling edges of SP2_CLK | 3    | -    | 18   | ns   |


Figure 2-19. SPI Interface Timing (Slave Mode)

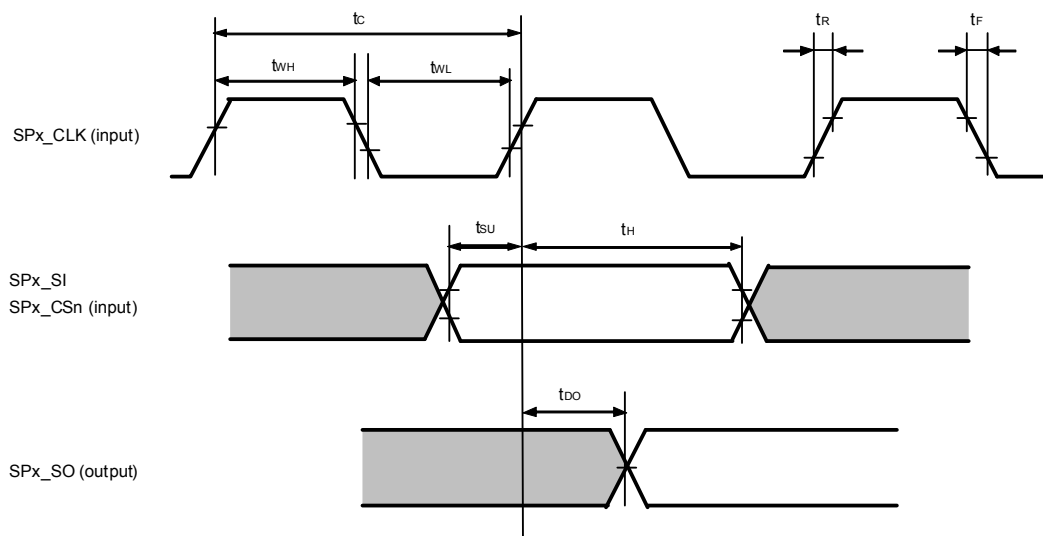

### 2.5.12 DTV interface

| Parameter                                  | Symbol   | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------------------------------|----------|------------|------|------|------|------|
| DTV_BCLK input cycle                       | $t_c$    | -          | 66   | -    | -    | ns   |
| DTV_BCLK high-level width                  | $t_{WH}$ | -          | 28   | -    | -    | ns   |
| DTV_BCLK low-level width                   | $t_{WL}$ | -          | 28   | -    | -    | ns   |
| DTV_DATA, DTV_PSYNC, DTV_VLD<br>setup time | $t_{SU}$ | -          | 12   | -    | -    | ns   |
| DTV_DATA, DTV_PSYNC, DTV_VLD<br>hold time  | $t_H$    | -          | 12   | -    | -    | ns   |

Figure 2-20. DTV Interface Timing

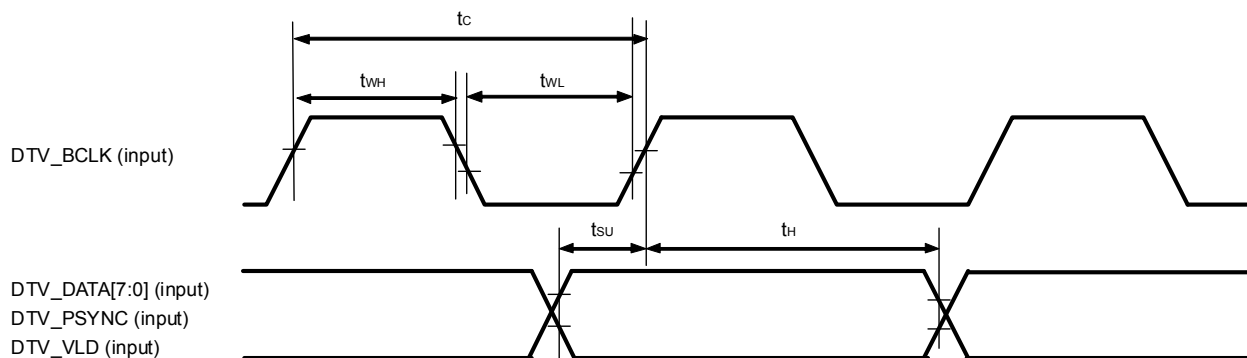


### 2.5.13 NAND Flash interface

| Parameter                | Symbol    | Conditions              | MIN.       | TYP. | MAX.         | Unit |
|--------------------------|-----------|-------------------------|------------|------|--------------|------|
| CLE setup time           | $t_{CLS}$ | -                       | $t_{c-3}$  | -    | $8 t_{c+3}$  | ns   |
| CLE hold time            | $t_{CLH}$ | -                       | $t_{c-3}$  | -    | $8 t_{c+3}$  | ns   |
| ALE setup time           | $t_{ALS}$ | -                       | $t_{c-3}$  | -    | $8 t_{c+3}$  | ns   |
| ALE hold time            | $t_{ALH}$ | -                       | $t_{c-3}$  | -    | $8 t_{c+3}$  | ns   |
| Write pulse width        | $t_{WP}$  | -                       | $t_{c-3}$  | -    | $16 t_{c+3}$ | ns   |
| WEZ high-level hold time | $t_{WH}$  | -                       | $t_{c-3}$  | -    | $16 t_{c+3}$ | ns   |
| Write data setup time    | $t_{DS1}$ | Rising edge of NAND_WEZ | $t_{WP-3}$ | -    | $t_{WP+3}$   | ns   |
| Write data hold time     | $t_{DH1}$ | Rising edge of NAND_WEZ | $t_{WH-3}$ | -    | $t_{WH+3}$   | ns   |

**Remarks 1.**  $t_c = t_c(\text{AHB})$  in the above table

**2.** The AC characteristics for NAND\_WEZ, REZ, CLE, and ALE are determined by a register setting, and the unit is  $t_c$  (when AHB = 83 MHz with ACPU operating at 500 MHz).


**Figure 2-21. NAND Flash Interface Timing 1**

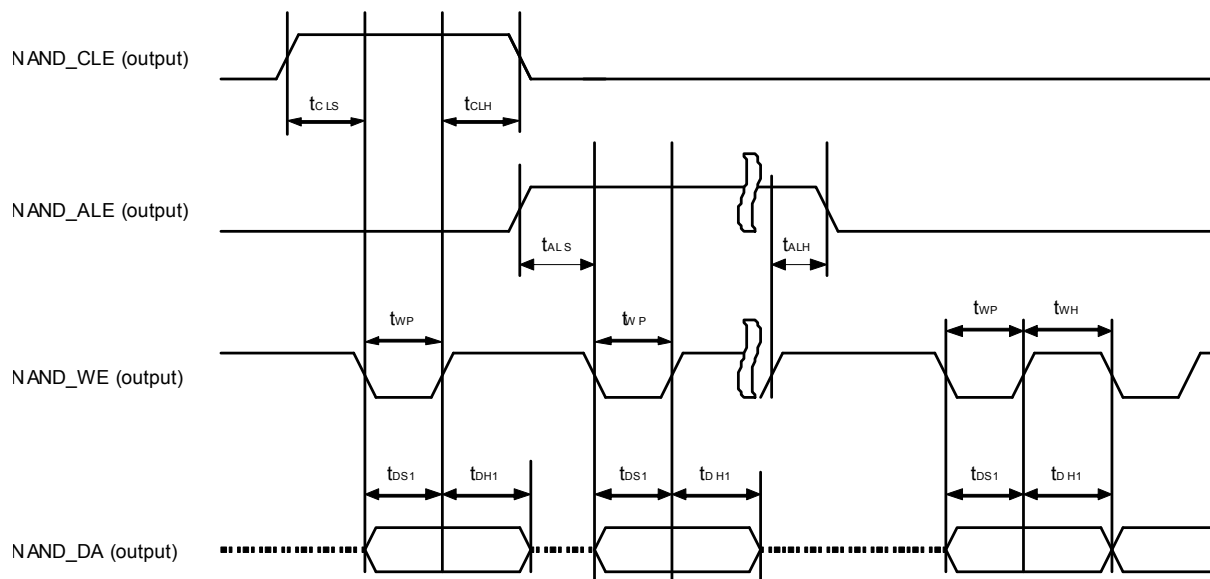

| Parameter            | Symbol    | Conditions             | MIN.      | TYP. | MAX.         | Unit |
|----------------------|-----------|------------------------|-----------|------|--------------|------|
| Read pulse width     | $t_{RP}$  | -                      | $t_{C-3}$ | -    | $16 t_{C+3}$ | ns   |
| High-level hold time | $t_{REH}$ | -                      | $t_{C-3}$ | -    | $16 t_{C+3}$ | ns   |
| Read data setup time | $t_{DS2}$ | Rising edge of NAND_OE | 8         | -    | -            | ns   |
| Read data hold time  | $t_{DH2}$ | Rising edge of NAND_OE | 0         | -    | -            | ns   |

- Remarks**
1.  $t_C$  in the above table =  $t_C$  when AHB = 83 MHz with ACPU operating at 500 MHz, = 12 ns
  2. The AC characteristics for NAND\_WE, OE, CLE, and ALE are determined by a register setting, and the unit is  $t_C$ .
  3. The internal bus clock is used for data latching during reading via NAND\_DA (input).

**Figure 2-22. NAND Flash Interface Timing 2**

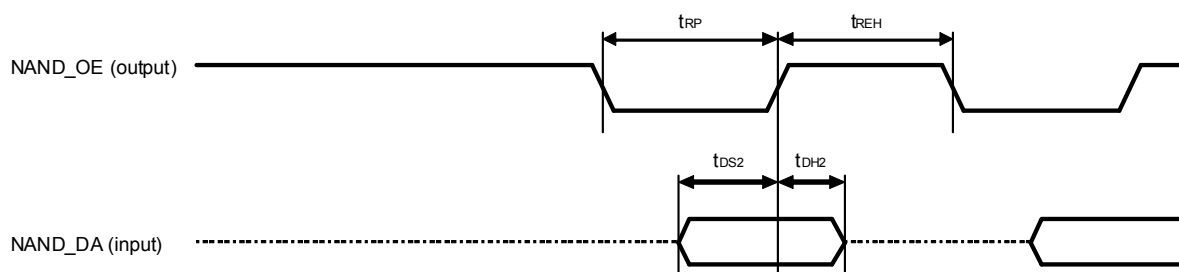


## 2.5.14 ITU-R BT.656 interface

| Parameter                   | Symbol   | Conditions              | MIN. | TYP.               | MAX. | Unit |
|-----------------------------|----------|-------------------------|------|--------------------|------|------|
| NTSC_CLK input cycle        | $t_c$    | -                       | -    | 37 <sup>Note</sup> | -    | ns   |
| NTSC_CLK high-level width   | $t_{WH}$ | -                       | 13   | -                  | -    | ns   |
| NTSC_CLK low-level width    | $t_{WL}$ | -                       | 13   | -                  | -    | ns   |
| NTSC_CLK rise time          | $t_R$    | -                       | -    | -                  | 5    | ns   |
| NTSC_CLK fall time          | $t_F$    | -                       | -    | -                  | 5    | ns   |
| NTSC_DATA output delay time | $t_D$    | Rising edge of NTSC_CLK | 4    | -                  | 18   | ns   |

**Note** NTSC\_CLK = 27 MHz


**Figure 2-23. ITU-R BT.656 Interface Timing**

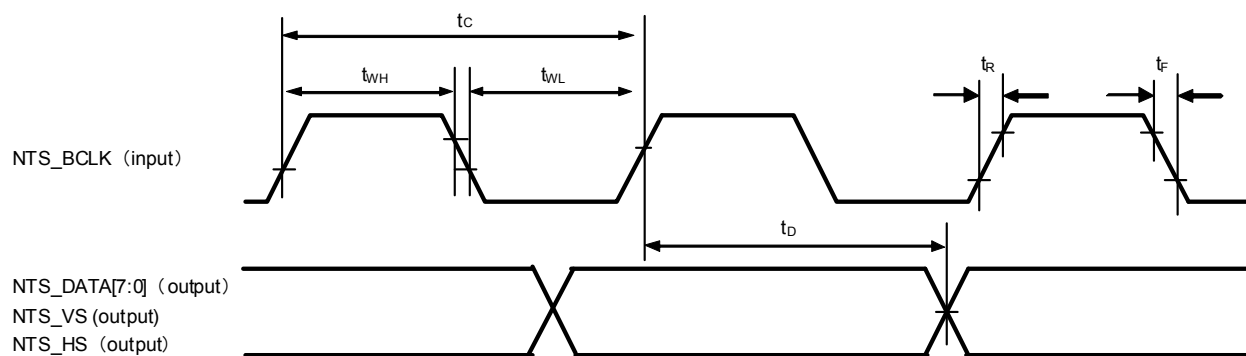

### 2.5.15 MICROWIRE interface


| Parameter                                     | Symbol   | Conditions            | MIN. | TYP. | MAX. | Unit |
|-----------------------------------------------|----------|-----------------------|------|------|------|------|
| MWI_SK clock cycle                            | $t_c$    | -                     | 160  | -    | -    | ns   |
| MWI_SK clock high-level width                 | $t_{WH}$ | -                     | 72   | -    | -    | ns   |
| MWI_SK clock low-level width                  | $t_{WL}$ | -                     | 72   | -    | -    | ns   |
| MWI_SK clock rise time                        | $t_R$    | -                     | -    | -    | 8    | ns   |
| MWI_SK clock fall time                        | $t_F$    | -                     | -    | -    | 8    | ns   |
| MWI_SI setup time                             | $t_{SU}$ | Rising edge of MWI_SK | 20   | -    | -    | ns   |
| MWI_SI hold time                              | $t_H$    | Rising edge of MWI_SK | 0    | -    | -    | ns   |
| MWI_SO, MWI_CS <sub>n</sub> output delay time | $t_D$    | Rising edge of MWI_SK | -    | -    | 20   | ns   |

Figure 2-24. MICROWIRE Interface Timing

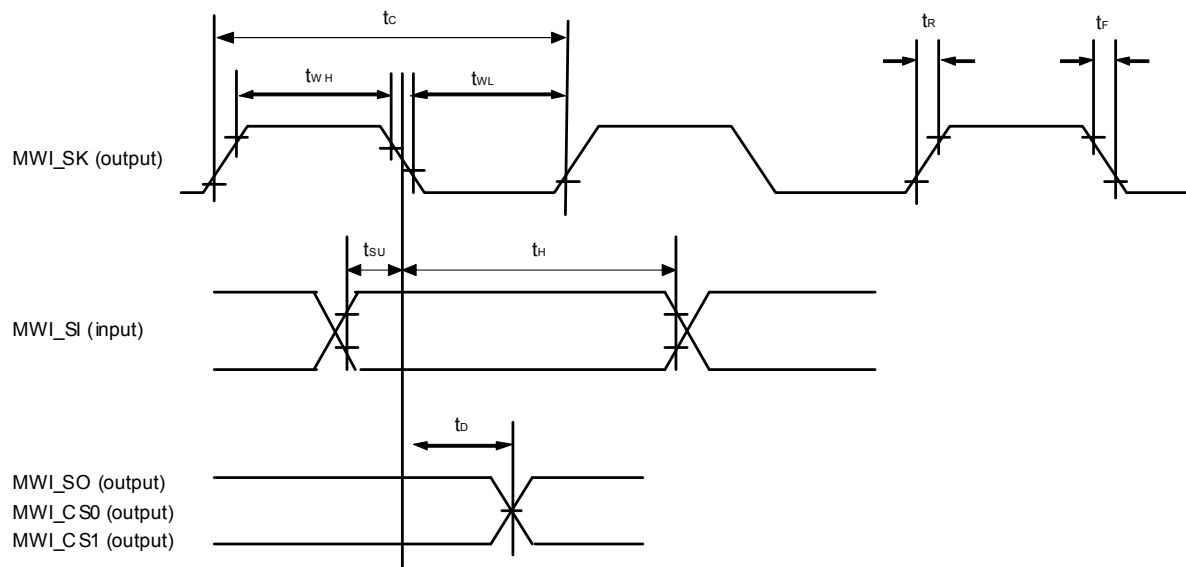

3. PACKAGE DRAWING

481-PIN PLASTIC FBGA (12.7x12.7)

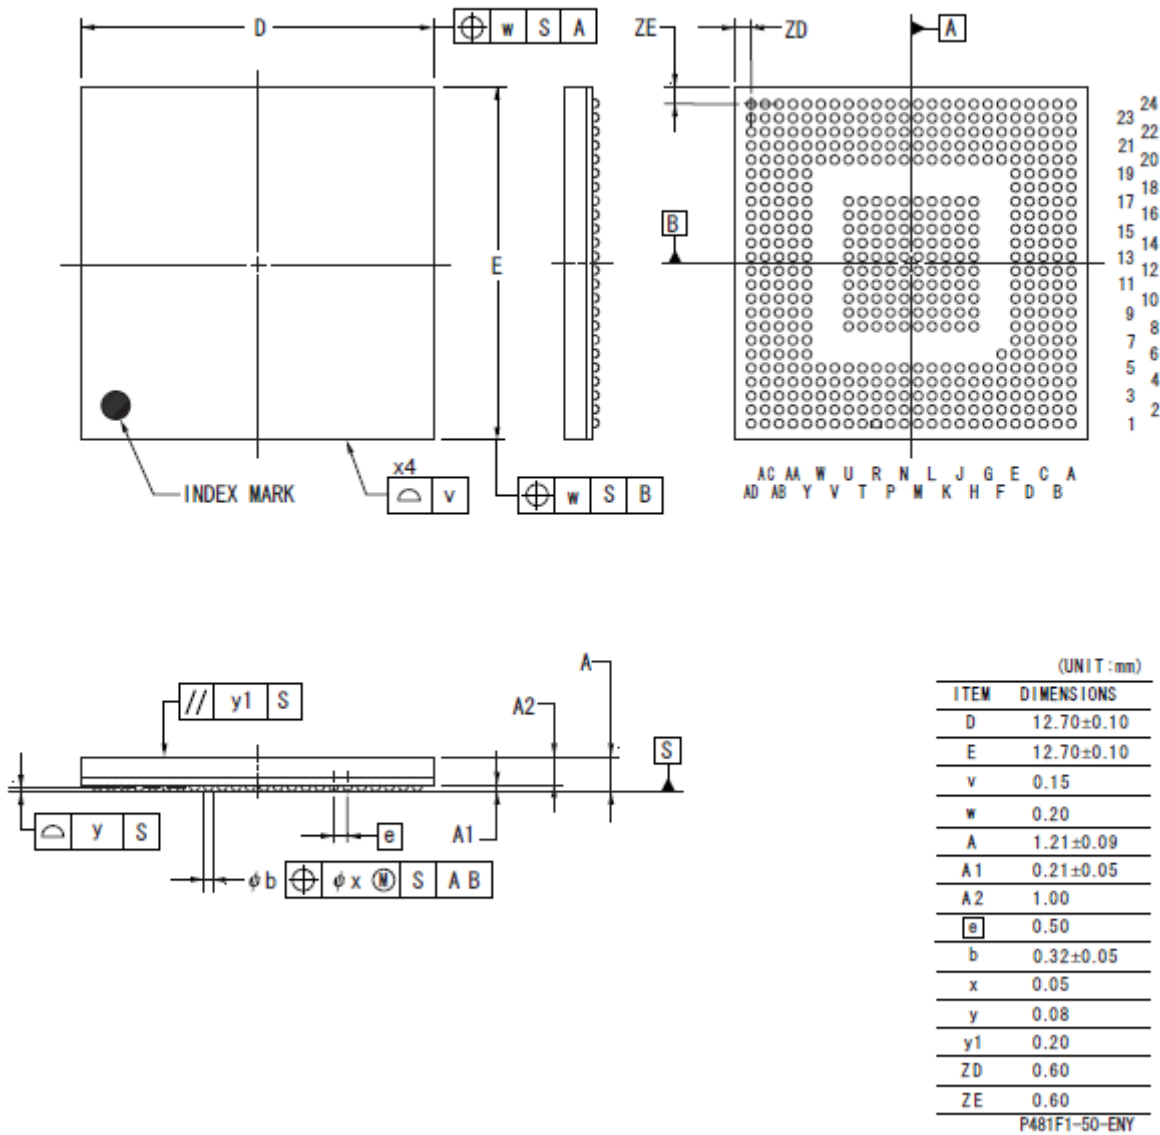

© NEC Electronics Corporation 2009

**Revision History**

| Date               | Revision | Comments                                                                                                                                                                                                           |
|--------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| February 10, 2009  | 1.0      | -                                                                                                                                                                                                                  |
| April 27, 2009     | 2.0      | Incremental update from comments to the 1.0..                                                                                                                                                                      |
| June 30, 2009      | 3.0      | Incremental update from comments to the 2.0.<br>The item of the power supply start-up sequence is added. (chapter 2.5.16)                                                                                          |
| September 30, 2009 | 4.0      | Incremental update from comments to the 3.0.<br>UTEST pins : Handling When Not Used : Leave open -> "L" level hold.<br>Power supply start-up (chapter 2.5.17) sequence is indicated on a user's manual (one chip). |
| December 22, 2009  | 5.0      | Incremental update from comments to the 4.0.<br>The specification of the self refresh current is changed with name of product change (MC-10118A->, MC-10118B).                                                     |
| February 15, 2010  | 6.0      | Incremental update from comments to the 5.0.<br>Change in the product name (MC-10118A/B->, MC-10118). A self-refresh electric current was returned to the value of revision 4.0.                                   |
| March 31, 2010     | 7.0      | Order name change (MC-10118AF1-ENY-A -> MC-10118BF1-ENY-A).<br>The specification of the self refresh current is changed with name of product change (MC-10118->, MC-10118B).                                       |

## NOTES FOR CMOS DEVICES

- (1) VOLTAGE APPLICATION WAVEFORM AT INPUT PIN:** Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between VIL (MAX) and VIH (MIN) due to noise, etc., the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between VIL (MAX) and VIH (MIN).
- (2) HANDLING OF UNUSED INPUT PINS:** Unconnected CMOS device inputs can be cause of malfunction. If an input pin is unconnected, it is possible that an internal input level may be generated due to noise, etc., causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using pull-up or pull-down circuitry. Each unused pin should be connected to VDD or GND via a resistor if there is a possibility that it will be an output pin. All handling related to unused pins must be judged separately for each device and according to related specifications governing the device.
- (3) PRECAUTION AGAINST ESD:** A strong electric field, when exposed to a MOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it when it has occurred. Environmental control must be adequate. When it is dry, a humidifier should be used. It is recommended to avoid using insulators that easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors should be grounded. The operator should be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with mounted semiconductor devices.
- (4) STATUS BEFORE INITIALIZATION:** Power-on does not necessarily define the initial status of a MOS device. Immediately after the power source is turned ON, devices with reset functions have not yet been initialized. Hence, power-on does not guarantee output pin levels, I/O settings or contents of registers. A device is not initialized until the reset signal is received. A reset operation must be executed immediately after power-on for devices with reset functions.
- (5) POWER ON/OFF SEQUENCE:** In the case of a device that uses different power supplies for the internal operation and external interface, as a rule, switch on the external power supply after switching on the internal power supply. When switching the power supply off, as a rule, switch off the external power supply and then the internal power supply. Use of the reverse power on/off sequences may result in the application of an overvoltage to the internal elements of the device, causing malfunction and degradation of internal elements due to the passage of an abnormal current. The correct power on/off sequence must be judged separately for each device and according to related specifications governing the device.
- (6) INPUT OF SIGNAL DURING POWER OFF STATE :** Do not input signals or an I/O pull-up power supply while the device is not powered. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Input of signals during the power off state must be judged separately for each device and according to related specifications governing the device.

**The names of other companies and products are the registered trademarks or trademarks of these companies.**

These commodities, technology or software, must be exported in accordance with the export administration regulations of the exporting country. Diversion contrary to the law of that country is prohibited.

- The information in this document is current as of March, 2010. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.
  - No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
  - NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
  - Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
  - While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
  - NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific". The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.
    - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.
    - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).
    - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
- The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.
- (Note 1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

(M8E0909E)

*For further information,  
please contact:*

**NEC Electronics Corporation**  
1753, Shimonumabe, Nakahara-ku,  
Kawasaki, Kanagawa 211-8668,  
Japan  
Tel: 044-435-5111  
<http://www.necel.com/>

**[America]**

**NEC Electronics America, Inc.**  
2880 Scott Blvd.  
Santa Clara, CA 95050-2554, U.S.A.  
Tel: 408-588-6000  
800-366-9782  
<http://www.am.necel.com/>

**[Europe]**

**NEC Electronics (Europe) GmbH**  
Arcadiastrasse 10  
40472 Düsseldorf, Germany  
Tel: 0211-65030  
<http://www.eu.necel.com/>

**Hanover Office**  
Podbielskistrasse 166 B  
30177 Hannover  
Tel: 0 511 33 40 2-0

**Munich Office**  
Werner-Eckert-Strasse 9  
81829 München  
Tel: 0 89 92 10 03-0

**Stuttgart Office**  
Industriestrasse 3  
70565 Stuttgart  
Tel: 0 711 99 01 0-0

**United Kingdom Branch**  
Cygnus House, Sunrise Parkway  
Linford Wood, Milton Keynes  
MK14 6NP, U.K.  
Tel: 01908-691-133

**Succursale Française**  
9, rue Paul Dautier, B.P. 52  
78142 Velizy-Villacoublay Cédex  
France  
Tel: 01-3067-5800

**Sucursal en España**  
Juan Esplandiu, 15  
28007 Madrid, Spain  
Tel: 091-504-2787

**Tyskland Filial**  
Täby Centrum  
Entrance S (7th floor)  
18322 Täby, Sweden  
Tel: 08 638 72 00

**Filiale Italiana**  
Via Fabio Filzi, 25/A  
20124 Milano, Italy  
Tel: 02-667541

**Branch The Netherlands**  
Steijgerweg 6  
5616 HS Eindhoven  
The Netherlands  
Tel: 040 265 40 10

**[Asia & Oceania]**

**NEC Electronics (China) Co., Ltd**  
7th Floor, Quantum Plaza, No. 27 ZhiChunLu Haidian  
District, Beijing 100083, P.R.China  
Tel: 010-8235-1155  
<http://www.cn.necel.com/>

**Shanghai Branch**  
Room 2509-2510, Bank of China Tower,  
200 Yincheng Road Central,  
Pudong New Area, Shanghai, P.R.China P.C:200120  
Tel:021-5888-5400  
<http://www.cn.necel.com/>

**Shenzhen Branch**  
Unit 01, 39/F, Excellence Times Square Building,  
No. 4068 Yi Tian Road, Futian District, Shenzhen,  
P.R.China P.C:518048  
Tel:0755-8282-9800  
<http://www.cn.necel.com/>

**NEC Electronics Hong Kong Ltd.**  
Unit 1601-1613, 16/F., Tower 2, Grand Century Place,  
193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: 2886-9318  
<http://www.hk.necel.com/>

**NEC Electronics Taiwan Ltd.**  
7F, No. 363 Fu Shing North Road  
Taipei, Taiwan, R. O. C.  
Tel: 02-8175-9600  
<http://www.tw.necel.com/>

**NEC Electronics Singapore Pte. Ltd.**  
238A Thomson Road,  
#12-08 Novena Square,  
Singapore 307684  
Tel: 6253-8311  
<http://www.sg.necel.com/>

**NEC Electronics Korea Ltd.**  
11F., Samik Lavied'or Bldg., 720-2,  
Yeoksam-Dong, Kangnam-Ku,  
Seoul, 135-080, Korea  
Tel: 02-558-3737  
<http://www.kr.necel.com/>