

Surge protection device - BXT-4XP-SEC-T3-120+1X2-24 - 2908684

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Wall-mounted NEMA 4/4X (IP66/67) polycarbonate enclosure with surge protection for 120 V AC/DC power and one 24 V DC loop with 28 V DC MCOV

Your advantages

- ✓ UL1449 Listed SPD
- ✓ Customizable: expand base unit with SPDs to suit your application
- ✓ Single solution for power, data, and signal in one enclosure
- ✓ Polycarbonate and 316L stainless steel enclosures available
- ✓ Eligible for limited lifetime warranty (in some U.S. markets)

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 321486
GTIN	4055626321486
Weight per Piece (excluding packing)	640.000 g
Country of origin	Germany

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Degree of protection	IP66 / NEMA 4X

General

Housing material	PC (polycarbonate)
------------------	--------------------

Surge protection device - BXT-4XP-SEC-T3-120+1X2-24 - 2908684

Technical data

General

Mounting type	Wall mounting
Type	DIN rail module, two-section, divisible
Direction of action	L/N-PE & Signal Line-Shield-Earth Ground

Protective circuit, power supply

EN type	T2 / T3
Combination wave U_{OC}	6 kV
Surge protection fault message	optical

Connection (protective circuit, power supply)

Connection method	Screw connection
Screw thread	M3
Stripping length	10 mm

Remote indicator contact (protective circuit, power supply)

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Connection method	Screw connection
Screw thread	M3
Stripping length	10 mm

Protective circuit, information technology

Nominal voltage U_N	120 V AC (Power)
	24 V DC (Signal)
Max. operating voltage U_{max}	150 V AC (Power)
	28 V DC (Signal)
Nominal current I_N	20 A (Power)
	450 mA (Signal)
Max. discharge current I_{max} (8/20) μs	10 kA (Power)
Max. discharge current I_{max} (8/20) μs maximum (line-line)	10 kA (Signal)
Max. discharge current I_{max} (8/20) μs maximum (line-earth)	10 kA (Signal)
Resistance per path	2.2 Ω (Signal)

Power supply, general

Connection method IN	Screw connection
Connection method OUT	Screw connection
Screw thread	M3
Tightening torque	0.5 Nm
Stripping length	10 mm
Conductor cross section flexible min.	0.2 mm ²

Surge protection device - BXT-4XP-SEC-T3-120+1X2-24 - 2908684

Technical data

Power supply, general


Conductor cross section flexible max.	2.5 mm²
Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	4 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

Environmental Product Compliance


REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Connection diagram

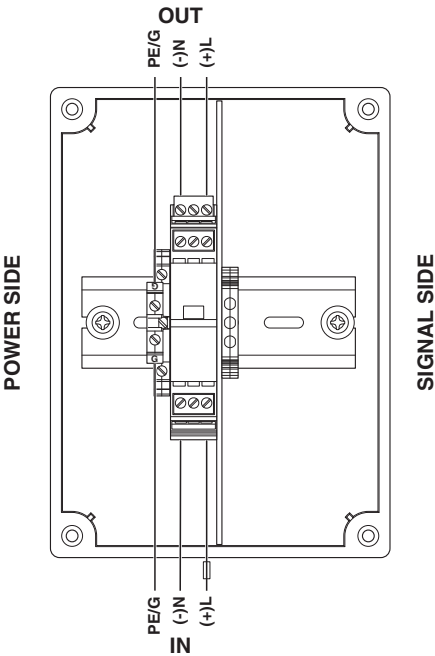

Dimensional drawing

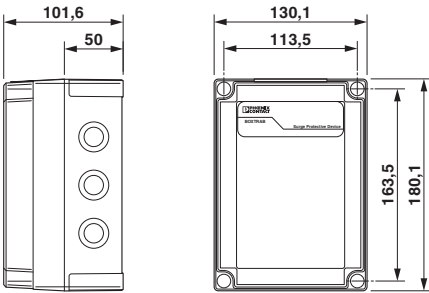

Surge protection device - BXT-4XP-SEC-T3-120+1X2-24 - 2908684

Articles in set

Type 3 surge protection device - PLT-SEC-T3-120-FM-UT - 2907918



Type 2/3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 120 V AC/DC

Surge protection plug - PT 1X2-24DC-ST - 2856032



PT protective connector with protective circuit for a 2-wire floating signal circuit. HART-compatible.

Surge protection base element - PT 1X2+F-BE - 2856126



Base element for protective plug PT with protective circuit for a 2-core floating signal circuit. Integrated gas arrester as coarse protection between GND and PE. Mounting on NS 35/7.5 und NS 35/15, housing width: 17.5 mm.

Classifications

eCl@ss

eCl@ss 10.0.1	27130810
eCl@ss 11.0	27130810
eCl@ss 9.0	27130810

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Surge protection device - BXT-4XP-SEC-T3-120+1X2-24 - 2908684

Approvals

Approval details

UL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 330181

cUL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 330181

cULus Listed



Accessories

Accessories

Full screw connection

Cable gland - G-INS-M16-T68N-PNES-LG - 1424470



Cable gland, cable gland material: PA, external cable diameter 4 mm ... 8 mm, shielding: no, connecting thread: M16 x 1.5, color: lightgrey RAL 7035

Cable gland - G-INS-M20-M68N-PNES-LG - 1424471



Cable gland, cable gland material: PA, external cable diameter 10 mm ... 14 mm, shielding: no, connecting thread: M20 x 1.5, color: lightgrey RAL 7035

Surge protection device - BXT-4XP-SEC-T3-120+1X2-24 - 2908684

Accessories

Cable gland - G-INS-M25-L68N-PNES-LG - 1424472



Cable gland, cable gland material: PA, external cable diameter 13 mm ... 18 mm, shielding: no, connecting thread: M25 x 1.5, color: lightgrey RAL 7035

Cable gland - G-INS-M32-L68N-PNES-LG - 1424473



Cable gland, cable gland material: PA, external cable diameter 18 mm ... 25 mm, shielding: no, connecting thread: M32 x 1.5, color: lightgrey RAL 7035

Spare parts

Type 3 surge protection plug - PLT-SEC-T3-120-P-UT/PT - 2907922



Replacement plug for type 2/3 surge protection from the PLT-SEC-...-UT/PT product series. Nominal voltage 120 V.