



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2005
© COPYRIGHT 2005 BY - ALL RIGHTS RESERVED.

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | A2 | ADDED NEW P/N | 30NOV2009 | AV | GT |
| | B | RELEASED FOR PRODUCTION | 13MAY2011 | AV | GT |
| | F | REVISED PER ECR-16-005692 | 02JUN2016 | RS | JL |
| | G | REVISED PER ECR-16-017348 | 24FEB2017 | RK | JL |

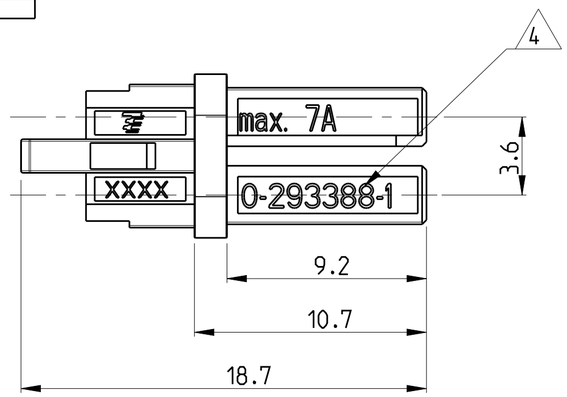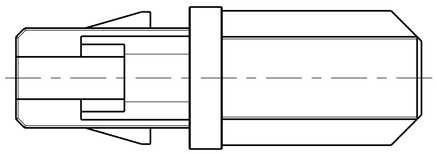

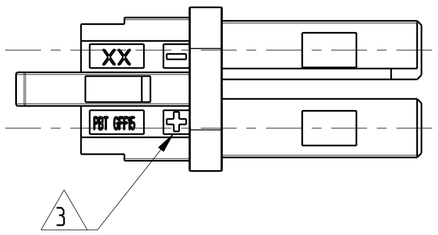


P/N 293388-1 AS SHOWN

Remarks:

1. cavities designed for MQS socket contact PN 1740336-x

2. Counterpart is Outlet PN 293387-x


△3 Polarity marking +/- permanent / usable for DC version

△4 PN specific marking


△5 P/N 293388-1 POLARIZATION HV-2 HAS TO BE USED FOR SWITCH APPLICATION ONLY

△6 PBT, 15%GF, UL94 V0 WHITE COLUR


Keying LV-2

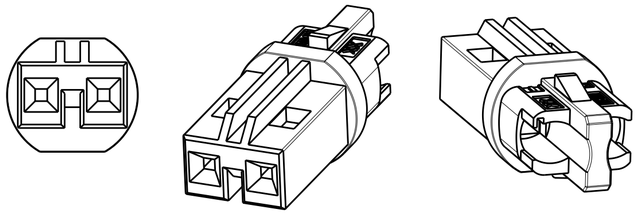


Keying HV-2

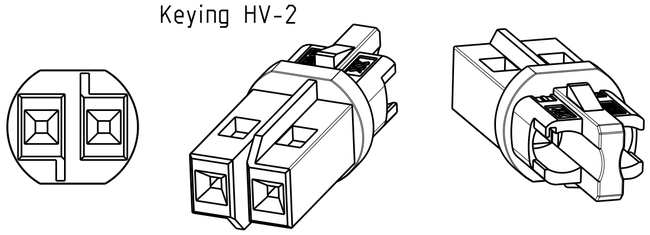


Keying HV-4

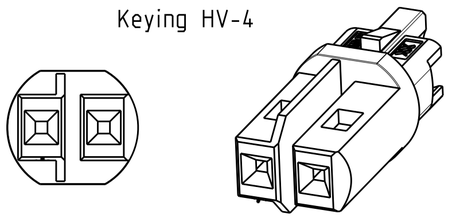

Keying HV-3

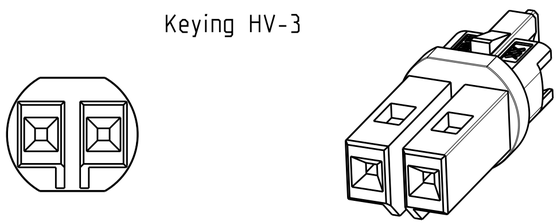

Keying HV-5

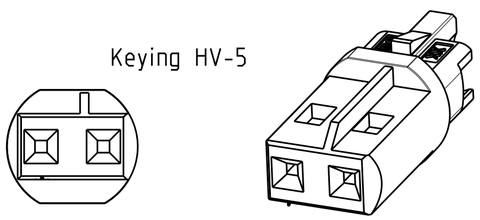

| Note | Keying | COLOR/MATERIAL | REMARKS | Marking △4 | PN |
|---|---|---|---|---|---|
| | LV-2 | WHITE △6 | LOW-VOLTAGE 125VAC/VDC | 7A 125VAC/VDC= | 293388-5 |
| | HV-5 | WHITE △6 | HIGH-VOLTAGE 125V AC | 6A/125V AC~ | 293388-4 |
| | HV-4 | WHITE △6 | HIGH-VOLTAGE 125V AC | 6A/125V AC~ | 293388-3 |
| | HV-3 | WHITE △6 | HIGH-VOLTAGE 125V AC | 6A/125V AC~ | 293388-2 |
| △5 | HV-2 | WHITE △6 | HIGH-VOLTAGE 125V AC | 6A/125V AC~ | 293388-1 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±0.2
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±1°

MATERIAL

FINISH -

DWN A. Vecchia 11FEB2009
CHK G. Turco 11FEB2009
APVD G. Turco 11FEB2009
PRODUCT SPEC
APPLICATION SPEC
WEIGHT 0.4 g
CUSTOMER DRAWING

TE Connectivity

NAME NECTOR S CONNECTOR SYSTEM PLUG

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-293388 | - |

SCALE 4:1 SHEET 1 OF 1 REV G

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:
293388-1