

Monolithic crystal filter

MQF10.7-1500/26



Application

- 6 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

Limiting values

		Unit	Value
Center frequency	f_0	MHz	10.7
Insertion loss		dB	≤ 3.0
Pass band at 3.0 dB		kHz	± 7.50
Ripple in pass band	$f_0 \pm 6.00$ kHz	dB	≤ 2.0
Stop band attenuation	$f_0 \pm 25$ kHz	dB	≥ 65
	$f_0 \pm 35$ kHz	dB	> 80
Alternate attenuation	$f_0 \pm 35$ kHz...5 MHz	dB	> 80 except spurious


Terminating impedance Z

R1 C1	Ohm/pF	910 25
R2 C2	Ohm/pF	910 25

Operating temp. range	° C	-20... +70
-----------------------	-----	------------



Characteristics MQF10.7-1500/26

Pass band

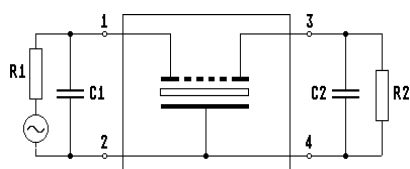

Pin connections: 1 Input
2 Input-E
3 Output
4 Output-E

Stop band

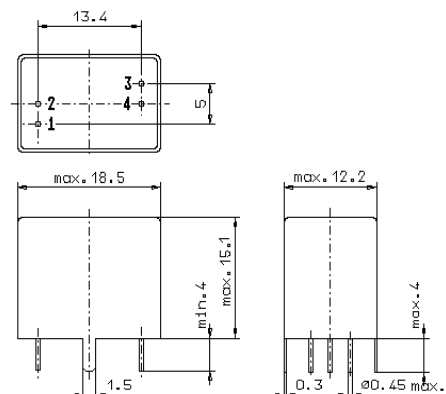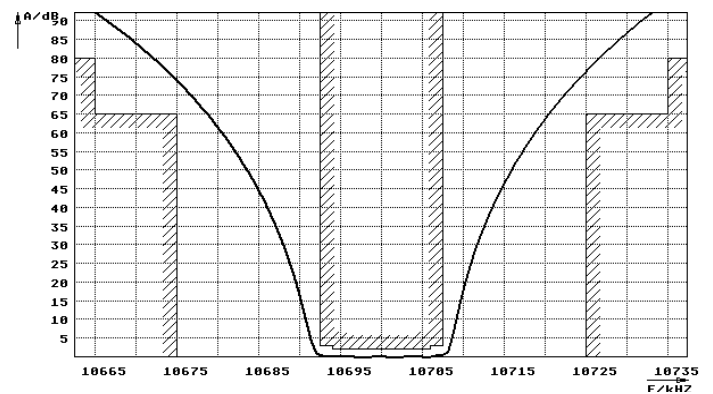

GV5.1