MIL-PRF-38534 CERTIFIED FACILITY

M.S.KENNEDY CORP.

HIGH CURRENT, LOW DROPOUT VOLTAGE REGULATORS

5116 SERIES

4707 Dey Road Liverpool, N.Y. 13088 (315) 701-6751

FEATURES:

- Electrically Isolated Top Tab or Z Tab SIP
- Extremely Low Dropout Voltage: 350mV @ 1.5 Amps
- Available in +1.5V, +1.7V, +1.9V, +2.5V, +3.3V, +5.0V and +12.0V
- TTL Level Enable Pin: Zero Current Shutdown Mode
- Reverse Battery and Load Dump Protection
- Low Ground Current: 32mA Typical at Full Load
- 1% Maximum Guaranteed Accuracy
- Output Current to 1.5 Amps

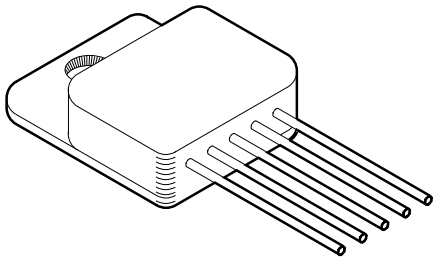

DESCRIPTION:

The MSK 5116 series voltage regulators are available in +1.5V, +1.7V, +1.9V, +2.5V, +3.3V, +5.0V and +12.0V configurations. All boast ultra low dropout specifications due to the utilization of a super PNP output pass transistor with monolithic technology. Dropout voltages of 350mV at 1.5 amps are typical in this configuration, which drives efficiency up and power dissipation down. Accuracy is guaranteed with a 1% maximum output voltage tolerance. The series also offers a TTL/CMOS compatible on/off enable function. The MSK 5116 series is packaged in a space efficient 5 pin power SIP available in two styles with three lead bend options.

EQUIVALENT SCHEMATIC

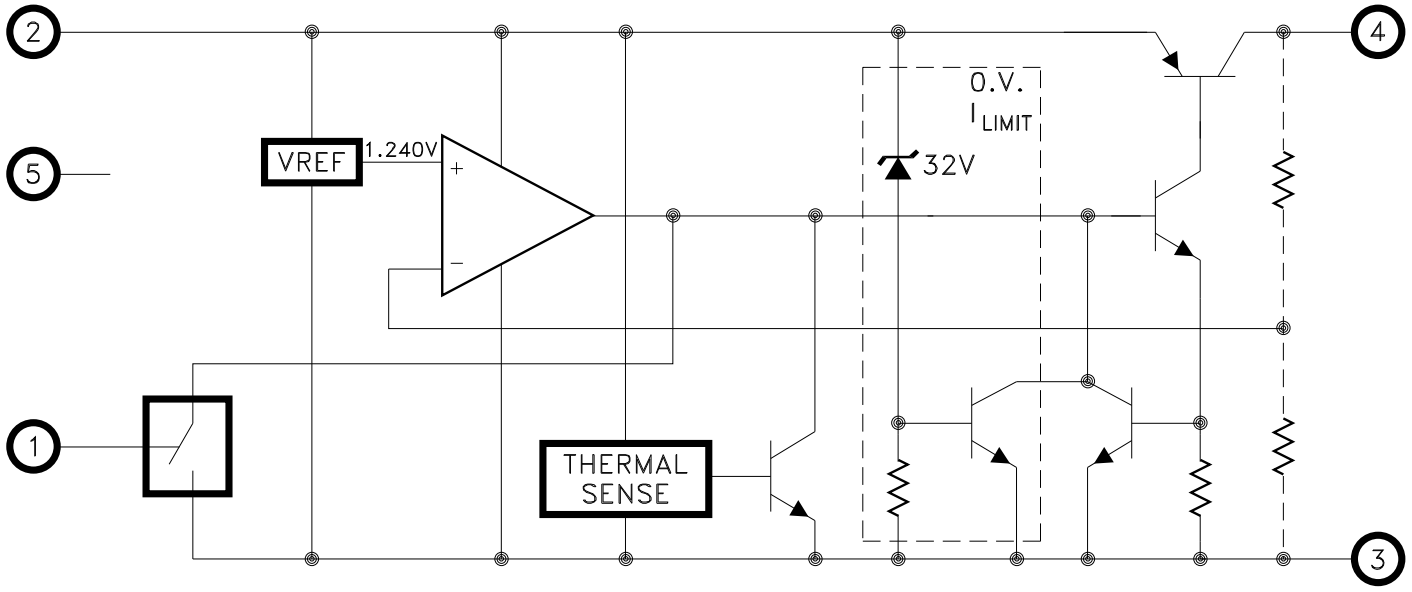

TYPICAL APPLICATIONS

- High Efficiency, High Current Linear Regulators
- Constant Voltage/Current Regulators
- System Power Supplies
- Switching Power Supply Post Regulators
- Battery Powered Equipment

PIN-OUT INFORMATION

1 Enable
2 Vin
3 Ground
4 Vout
5 NC

CASE = ISOLATED

8548-51 Rev. B 4/12

ABSOLUTE MAXIMUM RATINGS ⑨

V_{INP} Input Voltage (100mS 1%D.C.) -20V to +60V
V_{IN} Input Voltage 26V
V_{EN} Enable Voltage . . . . . -0.3V to 26V
I_{OUT} Output Current 3.5A

T_{ST} Storage Temperature Range -65°C to +150°C
T_{LD} Lead Temperature . . . . . 300°C
(10 Seconds Soldering)
T_J Operating Temperature
MSK 5116 Series . . . . . -40°C to +85°C
MSK 5116H Series . . . . . -55°C to +125°C

ELECTRICAL SPECIFICATIONS

Parameter	Test Conditions ①③		Group A Subgroup	MSK 5116H SERIES Min.	Typ.	Max.	MSK 5116 SERIES Min.	Typ.	Max.	Units
Output Voltage Tolerance	I_{OUT} = 10mA; V_{IN} = V_{OUT} + 1V		1	-	±0.5	±1.0	-	±0.5	±1.0	%
			2,3	-	±1.0	±2.0	-	-	-	%
Dropout Voltage ②	ΔV_{OUT} = -1%; I_{OUT}=100m A		1	-	80	200	-	80	225	mV
	ΔV_{OUT} = -1%; I_{OUT} = 1.5A		1	-	350	600	-	350	625	mV
Load Regulation ⑧	V_{IN} = V_{OUT} + 5V		1	-	±0.2	±1.0	-	±0.2	±1.2	%
	10mA ≤ I_{OUT} ≤ 1.25A		2,3	-	±0.3	±2.0	-	±0.3	-	%
Line Regulation	(V_{OUT} + 1V) ≤ V_{IN} ≤ 26V		1	-	±0.05	±0.5	-	±0.05	±0.6	%
	I_{OUT} = 10mA		2,3	-	±0.5	±1.0	-	±0.5	-	%
Output Current Limit ②	V_{OUT} = 0V; V_{IN} = V_{OUT} + 1V		-	-	2.1	3.5	-	2.1	3.5	A
Ground Current ②	V_{IN} = V_{OUT} + 1V; I_{OUT} = 0.75A		-	-	18	30	-	18	30	mA
	V_{IN} = V_{OUT} + 1V; I_{OUT} = 1.5A		-	-	32	-	-	32	-	mA
Output Noise ②	C_L = 10μF; 10Hz ≤ f ≤ 100KHz		-	-	400	-	-	400	-	μV
Enable Input Voltage ②		HIGH/ON	1	2.4	1.2	-	2.4	1.2	-	V
		LOW/OFF	1	-	1.2	0.8	-	1.2	0.8	V
Enable Input Current ②		HIGH/ON	1	-	100	600	-	20	600	μA
		LOW/OFF	1	-	-	2	-	-	2	μA
Shutdown Output Current②	V_{ENABLE} ≤ 0.8V		-	-	10	500	-	10	500	μA
Thermal Resistance ②	Junction to Case @ 125°C		-	-	3.1	3.6	-	3.1	3.7	°C/W
Thermal Shutdown ②	T_J		-	-	130	-	-	130	-	°C

NOTES:

① Output decoupled to ground using 33μF minimum capacitance unless otherwise specified.
② This parameter is guaranteed by design but need not be tested.
Typical parameters are representative of actual device performance but are for reference only.
③ All output parameters are tested using a low duty cycle pulse to maintain T_J = T_C.
④ Industrial devices shall be tested to subgroup 1 unless otherwise specified.
⑤ Military grade devices ('B' suffix) shall be 100% tested to subgroups 1,2,3.
⑥ Subgroup 1 T_C = +25°C
Subgroup 2 T_J = +125°C
Subgroup 3 T_A = -55°C
⑦ Please consult the factory if alternate output voltages are required.
⑧ Due to current limit, maximum output current may not be available at all values of V_{IN}-V_{OUT} and temperatures. See typical performance curves for clarification.
⑨ Continuous operation at or above absolute maximum ratings may adversely effect the device performance and/or life cyle.

APPLICATION NOTES

REGULATOR PROTECTION:

The MSK 5116 series is fully protected against reversed input polarity, overcurrent faults, overtemperature conditions (Pd) and transient voltage spikes of up to 60V. If the regulator is used in dual supply systems where the load is returned to a negative supply, the output voltage must be diode clamped to ground.

OUTPUT CAPACITOR:

The output voltage ripple of the MSK 5116 series voltage regulators can be minimized by placing a filter capacitor from the output to ground. The optimum value for this capacitor may vary from one application to the next, but a minimum of 10μF is recommended for optimum performance. This capacitor need not be an expensive low ESR type: aluminum electrolytics are adequate. In fact, extremely low ESR capacitors may contribute to instability. Tantalum capacitors are recommended for systems where fast load transient response is important. Transient load response can also be improved by placing a capacitor directly across the load.

LOAD CONNECTIONS

In voltage regulator applications where very large load currents are present, the load connection is very important. The path connecting the output of the regulator to the load must be extremely low impedance to avoid affecting the load regulation specifications. Any impedance in this path will form a voltage divider with the load.

ENABLE PIN

The MSK 5116 series of voltage regulators are equipped with a TTL compatible ENABLE pin. A TTL high level on this pin activates the internal bias circuit and powers up the device. A TTL low level on this pin places the controller in shutdown mode and the device draws approximately 10μA of quiescent current. If the enable function is not used, simply connect the enable pin to the input.

DEVICE/CASE CONNECTION:

The MSK 5116 series are highly thermally conductive devices and the thermal path from the package heat sink to the internal junctions is very short. Since the case is electrically isolated from the internal circuitry, the package can be directly connected to a heat sink.

HEAT SINK SELECTION:

To select a heat sink for the MSK 5116, the following formula for convective heat flow may be used.

Governing Equation:

$$Tj = Pd \times (R\theta jc + R\theta cs + R\theta sa) + Ta$$

WHERE:

Tj = Junction Temperature
Pd = Total Power Dissipation
Rθjc = Junction to Case Thermal Resistance
Rθcs = Case to Heat Sink Thermal Resistance
Rθsa = Heat Sink to Ambient Thermal Resistance
Ta = Ambient Temperature

First, the power dissipation must be calculated as follows:

$$\text{Power Dissipation} = (Vin - Vout) \times Iout$$

Next, the user must select a maximum junction temperature. The absolute maximum allowable junction temperature is 125°C. The equation may now be rearranged to solve for the required heat sink to ambient thermal resistance (Rθsa).

EXAMPLE:

An MSK 5116-3.3 is configured for Vin = +5V and Vout = +3.3V. Iout is a continuous 1A DC level. The ambient temperature is +25°C. The maximum desired junction temperature is 125°C.

Rθjc = 3.6°C/W and Rθcs = 0.15°C/W for most thermal greases

$$\text{Power Dissipation} = (5V - 3.3V) \times (1A) = 1.7 \text{ Watts}$$

Solve for Rθsa:

$$R\theta sa = \left[\frac{125°C - 25°C}{1.7W}\right] - 3.6°C/W - 0.15°C/W$$

$$= 55.07°C/W$$

In this example, a heat sink with a thermal resistance of no more than 55°C/W must be used to maintain a junction temperature of no more than 125°C.

TYPICAL PERFORMANCE CURVES

DROPOUT vs OUTPUT CURRENT

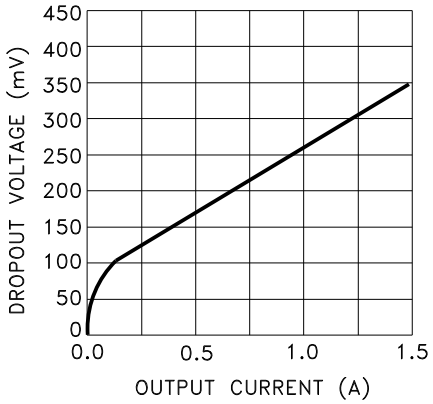

DROPOUT vs TEMPERATURE

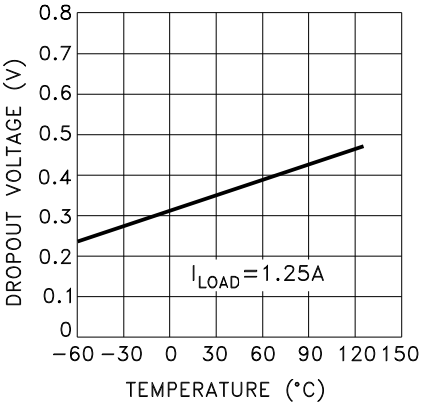

GROUND CURRENT vs. OUTPUT CURRENT

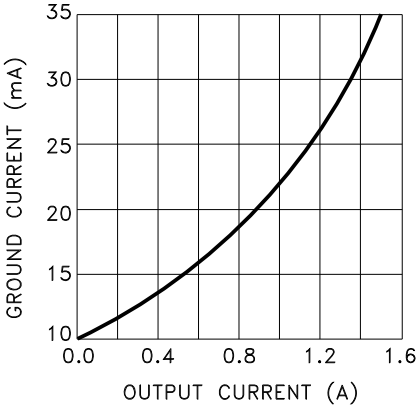

SHORT CIRCUIT CURRENT vs. TEMP.

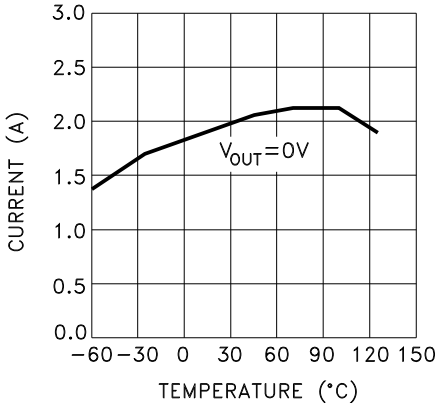

ENABLE CURRENT vs. TEMPERATURE

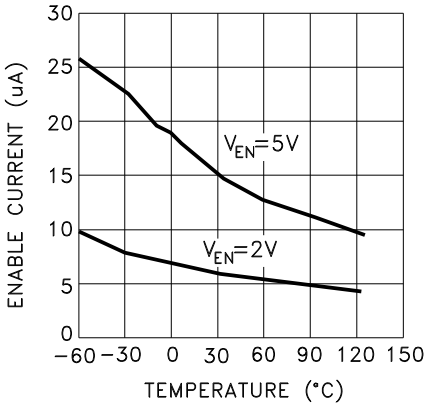

LOAD TRANSIENT RESPONSE

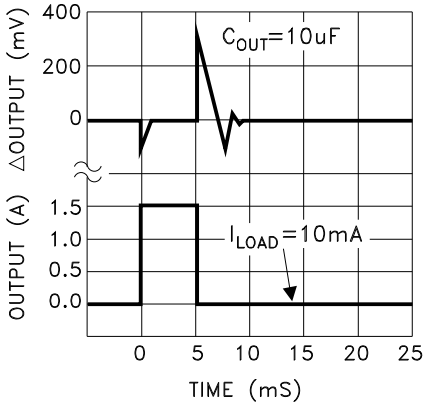

OUTPUT IMPEDANCE vs. FREQUENCY

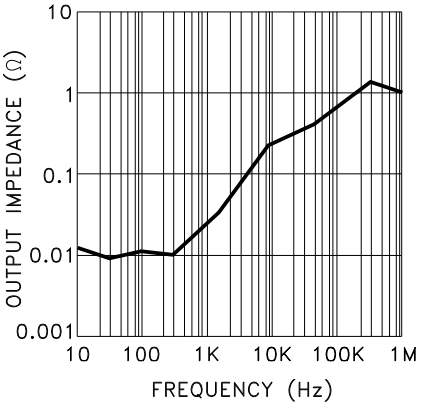

LINE TRANSIENT RESPONSE

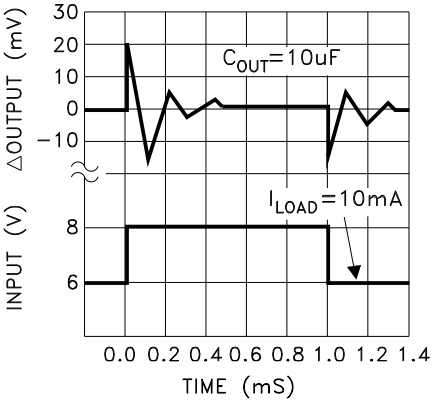

MECHANICAL SPECIFICATIONS

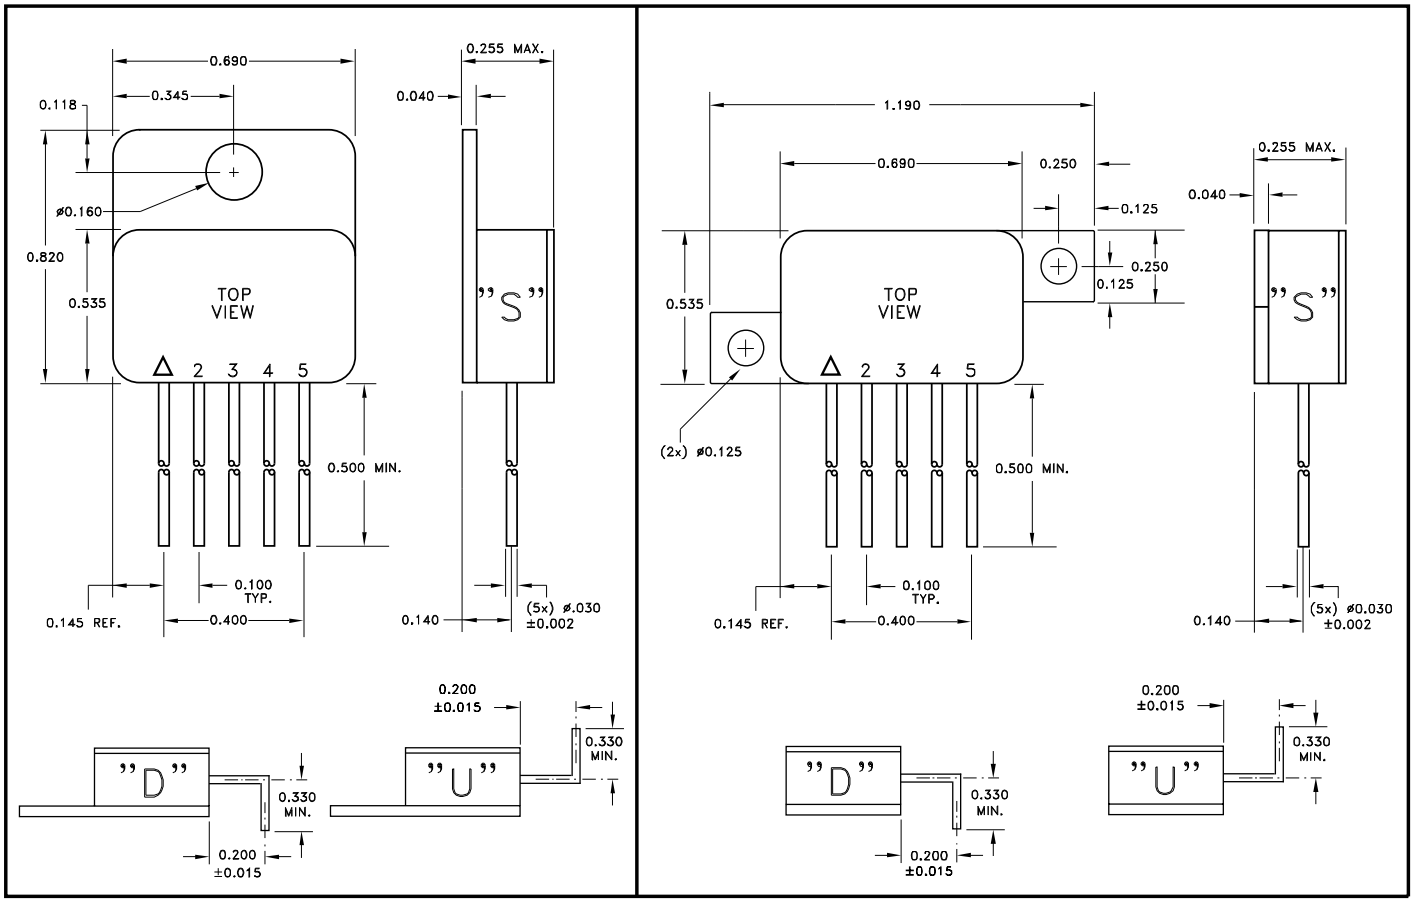

NOTE: ALL DIMENSIONS ARE ±0.010 INCHES UNLESS OTHERWISE LABELED.
ESD Triangle indicates Pin 1.

ORDERING INFORMATION

MSK5116-3.3 H T U

LEAD CONFIGURATIONS
S = STRAIGHT; U = BENT UP; D = BENT DOWN

PACKAGE STYLE
T = TOP TAB; Z = Z PACK

SCREENING
BLANK = INDUSTRIAL; H = MIL-PRF 38534 CLASS H

OUTPUT VOLTAGE
1.5 = +1.5V; 1.7 = +1.7V; 1.9 = +1.9V; 2.5 = +2.5V
3.3 = +3.3V; 5.0 = +5.0V; 12 = +12.0V

GENERAL PART NUMBER

The above example is a +3.3V, Military regulator using the top tab package with leads bent up.

M.S. Kennedy Corp.
4707 Dey Road, Liverpool, New York 13088
Phone (315) 701-6751
FAX (315) 701-6752
www.mskennedy.com

The information contained herein is believed to be accurate at the time of printing. MSK reserves the right to make changes to its products or specifications without notice, however, and assumes no liability for the use of its products. Please visit our website for the most recent revision of this datasheet.