
Keysight N5461A

Serial Data Equalization Software for Infiniium Series Oscilloscopes

Data Sheet

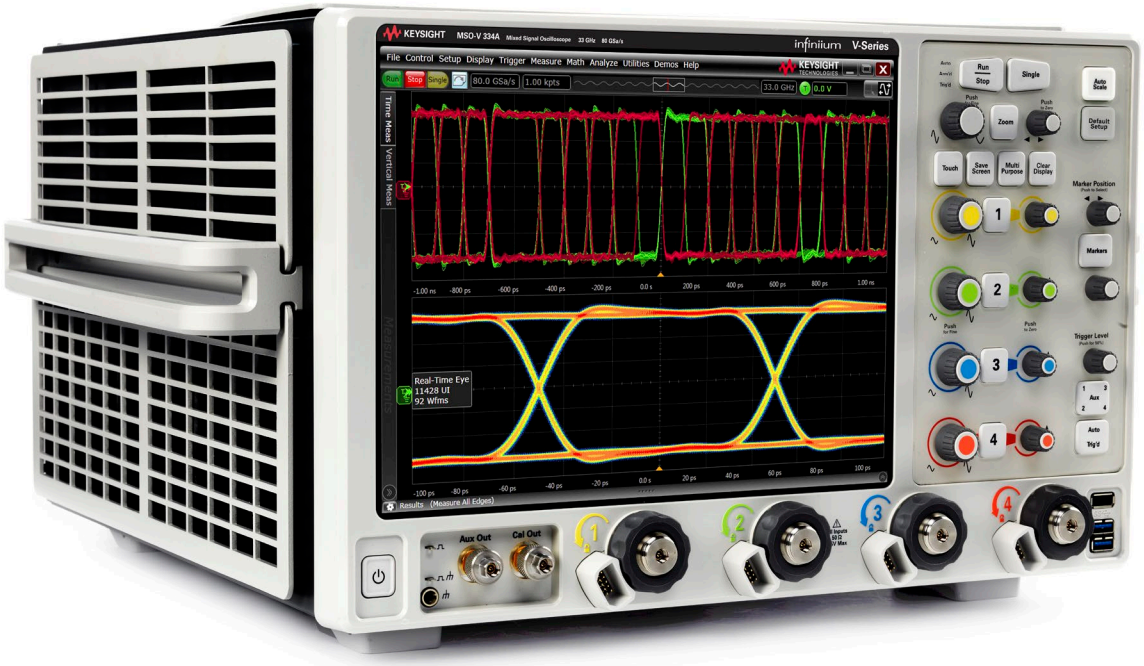

KEYSIGHT TECHNOLOGIES

Unlocking Measurement Insights

Significantly Reduce Receiver Errors by Opening Even Tightly Shut Eyes Through Equalization Emulation

The Keysight Technologies, Inc. serial data equalization (SDE) software for Infiniium Series oscilloscopes provides fast and accurate equalization simulating decision feedback equalization (DFE), feed-forward equalization (FFE), and continuous time linear equalization (CTLE) modeling in real time. SDE software allows users to input their own self-designated tap values or it will find the optimal tap values for the designer for FFE and DFE. CTLE allows DC gain and up to three-pole modeling.

Used in conjunction with the Infiniium Series scopes' unique Infiniium data accelerator (IDA) chip, SDE software provides fast update rates and rapid analysis of real-time eyes that have been partially or fully closed by the serial data link. The SDE software package includes a wizard that provides an easy-to-follow, step-by-step process to set up and emulate full equalization.

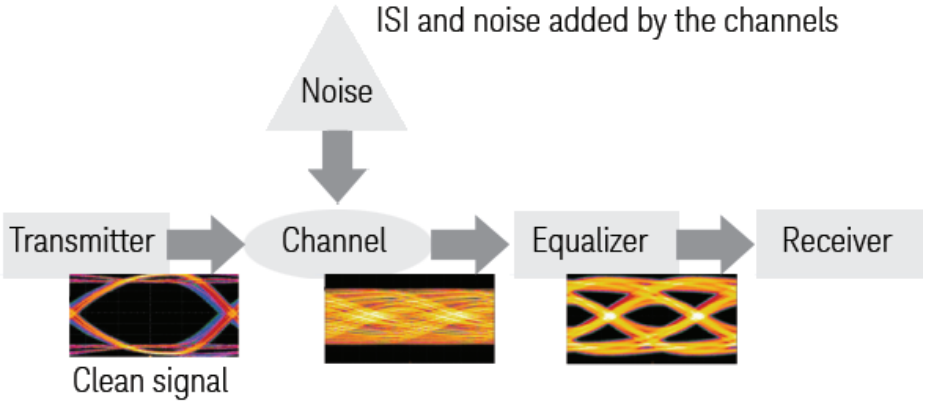


Figure 1. Complete link.

Equalization FAQ

1. Why do I need equalization?

   As data rates go up, the signal deteriorates from the transmitter to the receiver due to ISI, noise, etc. The more loss that occurs, the more difficult it is for a receiver comparator to distinguish a “1” from a “0”. A high data rate coupled with a lossy channel will cause an open eye at a transmitter to be closed at the receiver. Receivers need to be able to evaluate 1s and 0s. As eyes get more and more closed, the receiver has a more difficult time interpreting the correct value as a 1 or a 0. This difficulty ultimately leads to significant data corruption and errors. Equalization uses advanced filtering techniques to correct the voltage level of the current bit. By removing much of the intersymbol interference through filtering, equalization can improve closed eyes into open eyes and significantly reduce the data corruption. The equalization software provides insight into designers’ equalizer designs and key data into the viability of the channel link after equalization.

2. What is the difference between decision feedback equalization (DFE) and feed-forward equalization (FFE)?

   FFE typically looks only at the bits preceding the current bit to open the eye while DFE dynamically will change based on the current bit in addition to any previous bits. FFE uses the same filter for each receiver and every bit. DFE is adaptive and can vary by device. DFE can be used in addition to FFE; however FFE cannot be used in addition to DFE.

3. Why is it important to use an oscilloscope with low noise when using equalization software?

   If an oscilloscope has the lowest noise, the equalization technique will open the eye wider. Keep in mind that equalization will amplify any noise not caused by ISI, which by definition includes oscilloscope noise. Infiniium oscilloscopes have the industry’s lowest noise floor, so there is much less noise to be amplified. This results in greater equalization accuracy.

4. Why does the equalization software require serial data analysis software?

   Equalization requires the oscilloscope to know where the clock transitions. Clock data recovery allows the scope to know where the transition occurs, making equalization possible. Full clock data recovery can only be found in the serial data analysis software package.

Easy Equalization Setup

The serial data equalization software extends the ease-of-use advantages of Keysight's Infiniium oscilloscopes to complete analysis of the receiver. The equalization wizard walks you quickly through the steps required to setup and perform equalization. Intuitive displays and clear labeling of information make it easy to perform complex equalization emulation. The SDE wizard walks you through seven different equalization scenarios.

Equalization wizard options

1. FFE or CTLE are emulated, but the real time eye is not displayed. You will see only the waveform. This option lets you use the equalized waveform to perform further analysis on it such as jitter decompensation.

2. No equalization applied. Option 2 is to see the eye with no equalization applied. The option works great for comparing the impact of different equalization techniques.

3. FFE or CTLE are applied only to recover the clock, and the referenced eye is unequalized. As real time eyes get closer to being fully closed, it can be difficult for the software to recover a clock because it can be difficult to distinguish between a 1 and 0 and provide the correct data rate. This option makes it possible to easily recover the clock, even on closed eyes.

4. FFE or CTLE emulation.

5. Standard DFE emulation. One caveat for this option is that if your real time eye is closed, the DFE will not work correctly. You will need to use the next option to use FFE or CTLE to open the eye a little bit and then use DFE.

6. Standard DFE emulation for a closed eye. Note that FFE or CTLE is used to recover the clock, but is not displayed in the real time eye.

7. FFE is applied and then DFE is applied to the real time eye. Both are displayed in the resulting real time eye.

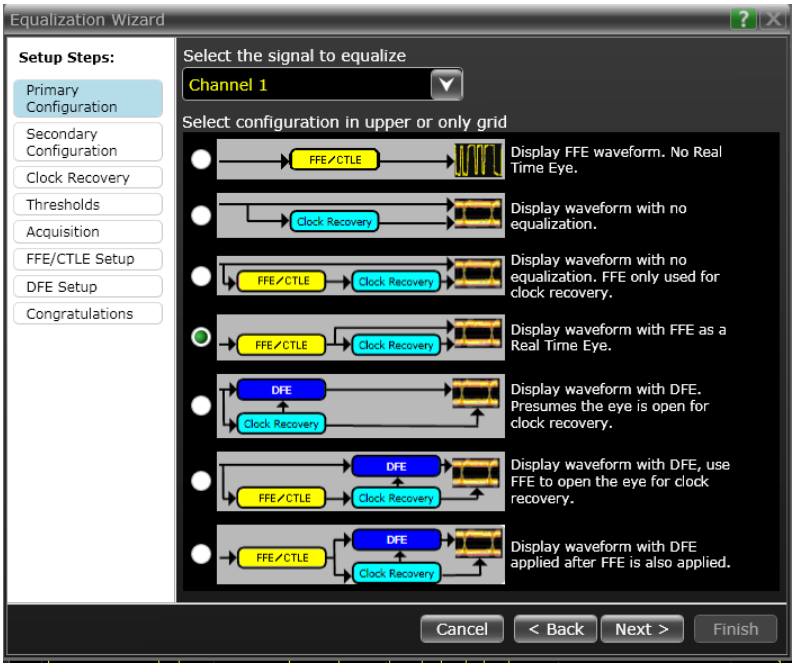


Figure 2. Equalization options from the wizard.

CTLE, FFE and DFE Emulation

The SDE software provides full emulation of decision feedback, feed-forward, and continuous time linear equalization. The software provides the flexibility to compare real time eyes of a non-equalized waveform versus an equalized waveform, or to compare a DFE waveform versus an FFE or CTLE waveform.

SDE software allows you to quickly compare different tap values. Tap values are dimensionless correction factors applied to the bit voltage levels in serial data patterns during equalization. Tap values can be viewed as the ratio of the voltage the receiver should have seen versus what the receiver actually did see. Accurate tap values are essential for modeling an ideal real time eye at the receiver. Serial data equalization software will save you time by modeling up to forty tap values for you. In addition to this, you can use the serial data equalization software package to find what combination of tap values will maximize eye height. SDE software provides precursor tap functionality for FFE emulation.

Serial data equalization provides multiple inputs including an “eye width” option that optimizes the tap values based on whether the designer wants a wider or higher eye. Unlike some equalization emulation packages, serial data equalization works on any pattern and the software does not need to know the pattern the designer is using.

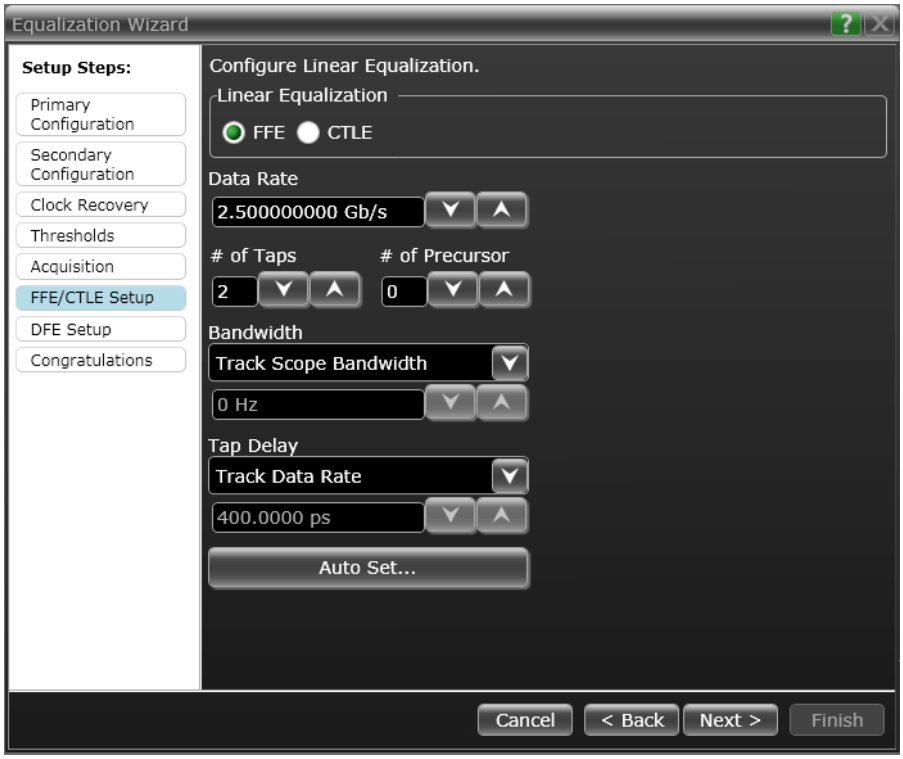


Figure 3. Equalization menu in the equalization wizard.

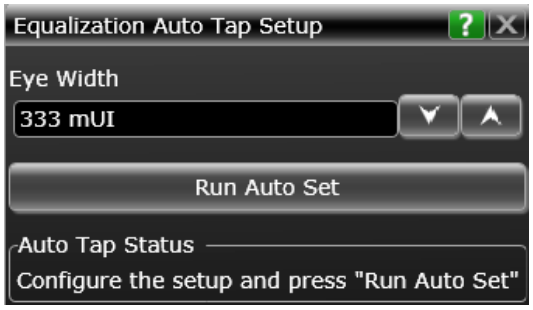


Figure 4. Automatically find the tap values.

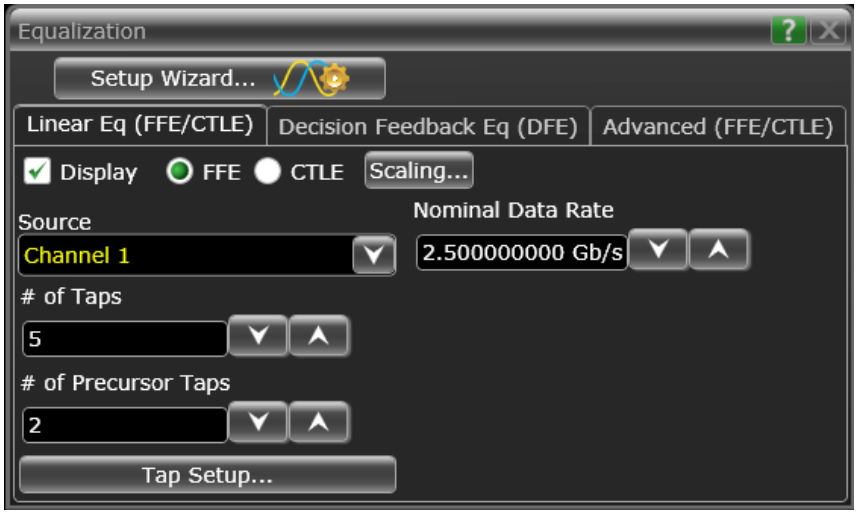


Figure 5. Equalization allows you to choose between FFE, CTLE, and DFE.

Continuous Time Linear Equalization (CTLE)

Many of today's standards require CTLE as part of compliance testing. SDE software makes verifying emulation easy. Simply enter your DC gain value, zero frequency, and pole1 and pole2 frequency values to verify your design.

Serial data equalization also supports USB 3.1's specific CTLE.

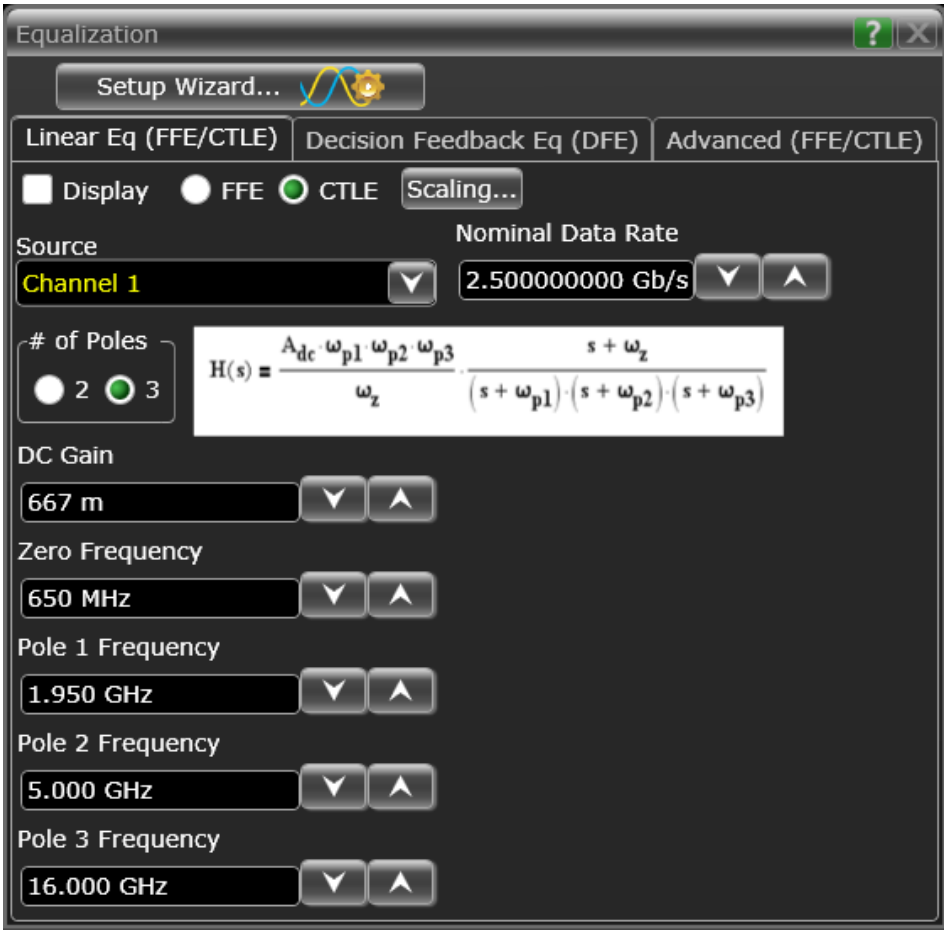


Figure 6. Serial data equalization supports both 2- and 3-pole CTLE.

Flexible Clock Recovery

Choose constant-frequency, first-order phase-locked loop (PLL), second-order PLL clock recovery, explicit clock, explicit first order PLL, explicit second order PLL or FibreChannel clock recovery methods. Adjust the center frequency and bandwidth, and in the case of second-order PLL, the damping factor.

New to the equalization software is the equalized first and second order PLL, which allows you to recover the clock on a closed eye. This is accomplished by first applying FFE or CTLE to the waveform and then recovering the clock, making clock recovery possible even on closed eyes.

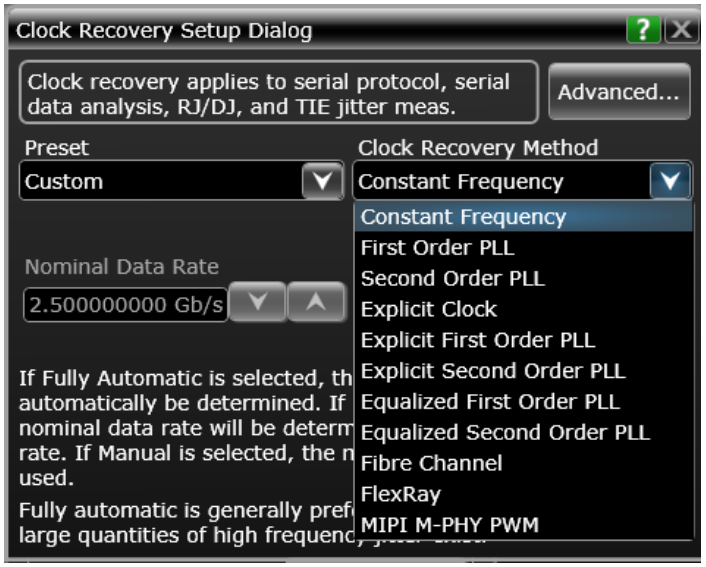


Figure 7. Clock recovery set up.

Oscilloscope Compatibility

The Infiniium serial data equalization software is compatible with Infiniium Z-, V- and S-Series, 90000Q, 90000X, 90000A, and 9000 oscilloscopes with operating software revision 1.40 or higher (Windows XP Pro). For oscilloscopes with earlier software revisions, free upgrade software is available at: **http://www.keysight.com/find/infiniium_sw_download**.

The software is also available as part of Infiniium Offline, meaning you can do all your equalization emulation at your PC and not be tied to the oscilloscope.

Ordering Information


To purchase the N5461A Infiniium serial data equalization software for your new or existing Z-, V- and S-Series, 90000Q, 90000X, 90000A, and 9000 oscilloscope, order the following:

For Infiniium Series oscilloscopes

	License type		Infiniium Z- and V-Series	Infiniium 90000X and 90000A Series	Infiniium S-Series	Infiniium 9000 Series
Serial data equalization software	Fixed	Factory-installed	N5461A-1FP	DSO90000A-012	N5461B-1FP	DSO9000A-012 or MSO9000A-012
		User-installed	N5461A-1FP	N5461A-1FP	N5461B-1FP	N5461B-1FP
	Floating	Transportable	N5461A-1TP	N5461A-1TP	N5461B-1TP	N5461B-1TP
		Server-based	N5435A-025	N5435A-025	N5435A-025	N5435A-025
High-speed SDA software	Fixed	Factory-installed	E2688A-1FP	DSO90000A-003	N5384A-1FP	DSO9000A-003 or MSO9000A-003
		User-installed	E2688A-1FP	E2688A-1FP	N5384A-1FP	N5384A-1FP
	Floating	Transportable	E2688A-1TP	E2688A-1TP	N5384A-1TP	N5384A-1TP
		Server-based	N5435A-003	N5435A-003	N5435A-003	N5435A-003

Related Literature

Publication title	Publication number
E2688A, N5384A High-Speed Serial Data Analysis and Clock Recovery Software for Infiniium Oscilloscopes - Data Sheet	5989-0108EN
Infiniium 90000 Series Oscilloscopes - Data Sheet	5989-7819EN
Infiniium 9000 Series Oscilloscopes - Data Sheet	5990-3746EN
Infiniium 90000 X-Series Oscilloscopes - Data Sheet	5990-5271EN
Infiniium Z-Series Oscilloscopes - Data Sheet	5991-3868EN
Infiniium S-Series High-Definition Oscilloscopes - Data Sheet	5991-3904EN
Infiniium V-Series Oscilloscopes - Data Sheet	5992-0425EN

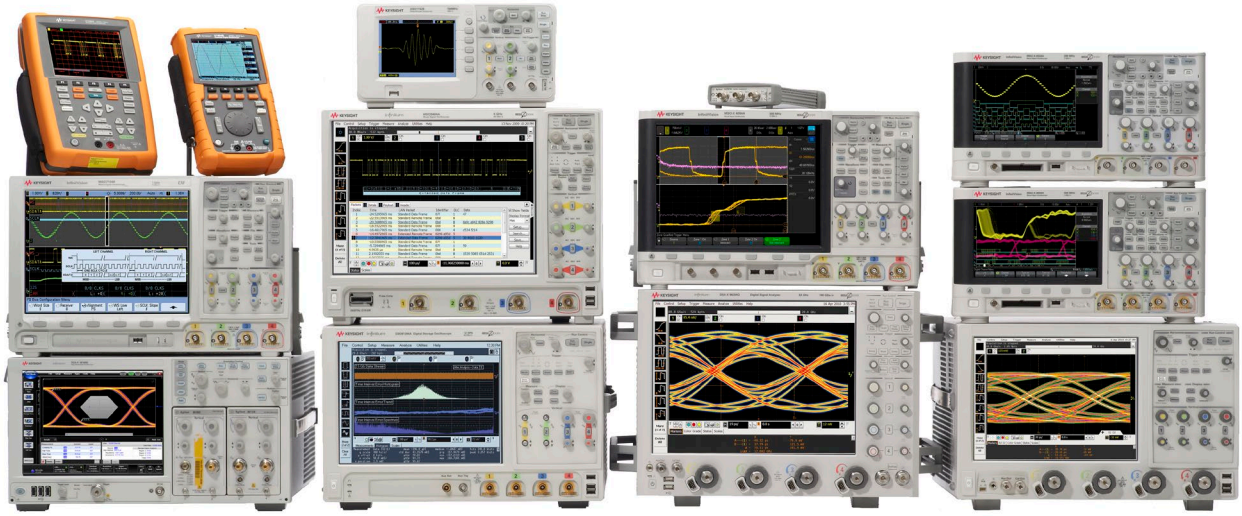

Keysight Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications

www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.

www.lxistandard.org


LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.

www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. Unlocking measurement insights since 1939.

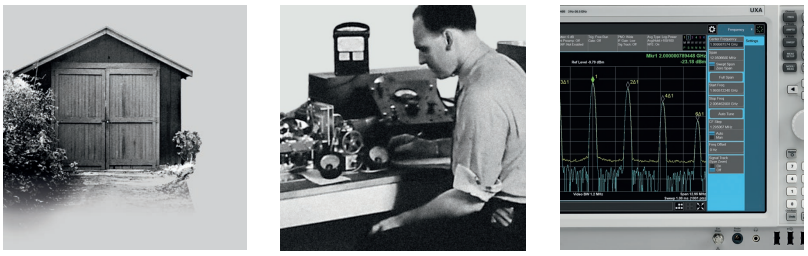

myKeysight

myKeysight

www.keysight.com/find/mykeysight
A personalized view into the information most relevant to you.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty
Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with a three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans
Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Infoline

www.keysight.com/find/service
Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

Keysight Channel Partners

www.keysight.com/find/channelpartners
Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com
www.keysight.com/find/sde

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:
www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353 Opt. 1 (DE) Opt. 2 (FR) Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-01-01-16)

DEKRA Certified ISO 9001:2008

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

KEYSIGHT TECHNOLOGIES
Unlocking Measurement Insights

This information is subject to change without notice.
© Keysight Technologies, 2010 - 2016
Published in USA, January 29, 2016
5990-3330EN
www.keysight.com