



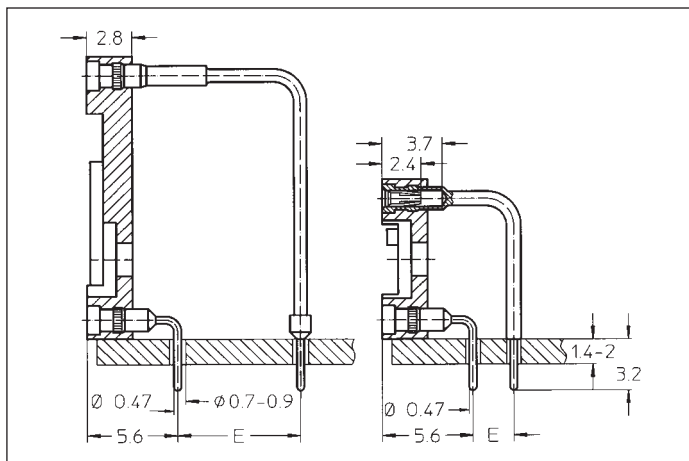

Series 299 DIL sockets with closed frame insulator are designed for components to be mounted perpendicularly to the PCB, such as LED displays

Right angle solder-tails are available with either 7.62 mm (standard) or 2.54 mm row spacing


Insertion characteristics:
4-finger standard

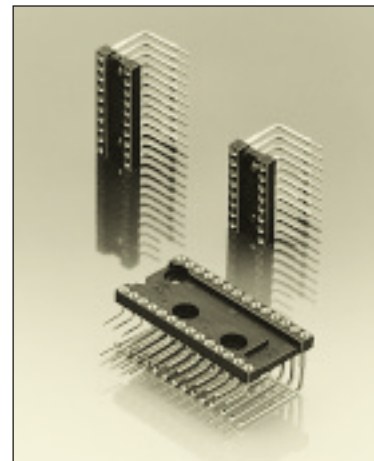

Platings	Sleeve 	Clip 	Pin 
93 91	5 µm Sn Pb 5 µm Sn Pb	0.75 µm Au 0.25 µm Au	

Ordering information

For complete part number see Order Codes list below

No. of poles	Order Codes					Insulator dimensions			
	Plating 93 B	Plating 93 B	Plating 91 B	Plating 91 B			A	B	C
	E = 7.62	E = 2.54	E = 7.62	E = 2.54		See page 51			
6	299-93-306-10-001	299-93-306-11-001	299-91-306-10-001	299-91-306-11-001			7.6	7.62	10.1
8	299-93-308-10-001	299-93-308-11-001	299-91-308-10-001	299-91-308-11-001			10.1	7.62	10.1
10	299-93-310-10-001	299-93-310-11-001	299-91-310-10-001	299-91-310-11-001			12.6	7.62	10.1
12	299-93-312-10-001	299-93-312-11-001	299-91-312-10-001	299-91-312-11-001			15.2	7.62	10.1
14	299-93-314-10-001	299-93-314-11-001	299-91-314-10-001	299-91-314-11-001			17.7	7.62	10.1
16	299-93-316-10-001	299-93-316-11-001	299-91-316-10-001	299-91-316-11-001			20.3	7.62	10.1
18	299-93-318-10-001	299-93-318-11-001	299-91-318-10-001	299-91-318-11-001			22.8	7.62	10.1
20	299-93-320-10-001	299-93-320-11-001	299-91-320-10-001	299-91-320-11-001			25.3	7.62	10.1
24	299-93-324-10-001	299-93-324-11-001	299-91-324-10-001	299-91-324-11-001			30.4	7.62	10.1
8	299-93-608-10-002		299-91-608-10-002				10.1	15.24	17.7
10	299-93-610-10-002		299-91-610-10-002				12.6	15.24	17.7
12	299-93-612-10-002		299-91-612-10-002				15.2	15.24	17.7
14	299-93-614-10-002		299-91-614-10-002				17.7	15.24	17.7
16	299-93-616-10-002		299-91-616-10-002				20.1	15.24	17.7
18	299-93-618-10-002		299-91-618-10-002				22.8	15.24	17.7
20	299-93-620-10-002		299-91-620-10-002				25.3	15.24	17.7
22	299-93-622-10-002		299-91-622-10-002				27.8	15.24	17.7
24	299-93-624-10-002		299-91-624-10-002				30.4	15.24	17.7
26	299-93-626-10-002		299-91-626-10-002				33.0	15.24	17.7
28	299-93-628-10-002		299-91-628-10-002				35.5	15.24	17.7
30	299-93-630-10-002		299-91-630-10-002				38.0	15.24	17.7
32	299-93-632-10-002		299-91-632-10-002				40.6	15.24	17.7
36	299-93-636-10-002		299-91-636-10-002				45.7	15.24	17.7
40	299-93-640-10-002		299-91-640-10-002				50.6	15.24	17.7