



Fast Recovery High Voltage Diodes

Features


- Super small size
- High reliability
- High speed switching

Typical Applications

Rectification for high voltage power supply of color T.V., CRT display, V.T.R camera and others

Mechanical Data

- **Package:** HV-04
Epoxy meets UL 94 V-0 flammability rating
- **Terminals:** Pure tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Color band denotes the cathode end



■Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	2CL74A	2CL75A
Device marking code				T74A	T75A
Repetitive Peak Reverse Voltage	V_{RRM}	KV		14	16
Non-Repetitive Peak Reverse Voltage	V_{RSM}	KV		17	20
Average Forward Current	$I_{F(AV)}$	mA	60Hz half-sine wave, Resistance load, Ta=25°C	5	
Non-Repetitive Forward Surge Current	I_{FSM}	A	60Hz half-sine wave, 1 cycle, Ta = 25°C	0.5	
Peak Forward Voltage	V_{FM}	V	$I_{FM}=10mA$	51	60
Peak Reverse Current	I_{RRM}	μA	$V_{RM}=V_{RRM}$, Ta=25°C	2	
			$V_{RM}=V_{RRM}$, Ta=100°C	5	
Reverse Recovery time	t_{rr}	μs	$I_F=2mA, I_{RM}=4mA, I_{RR}=1mA$	0.08	
Operating Ambient Temperature	T_a	°C		-40 ~ +100	
Storage Temperature	T_{stg}	°C		-40 ~ +120	
Virtual Junction Temperature	$T_{(vj)}$	°C		120	



2CL74A THRU 2CL75A

■ Characteristics (Typical)

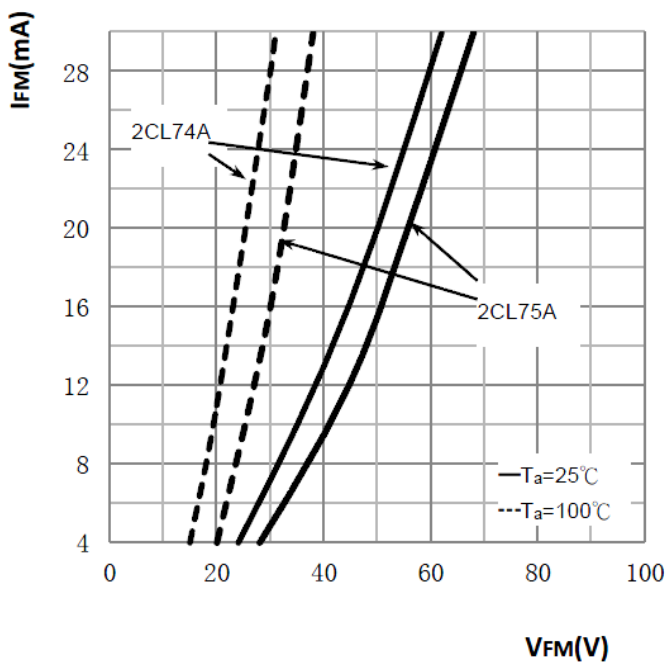


Figure 1. Forward characteristics

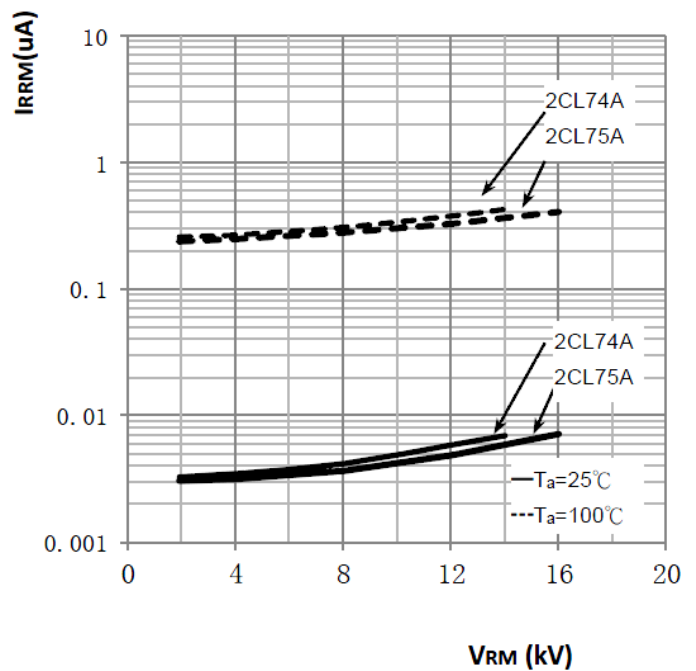


Figure 2. Reverse characteristics

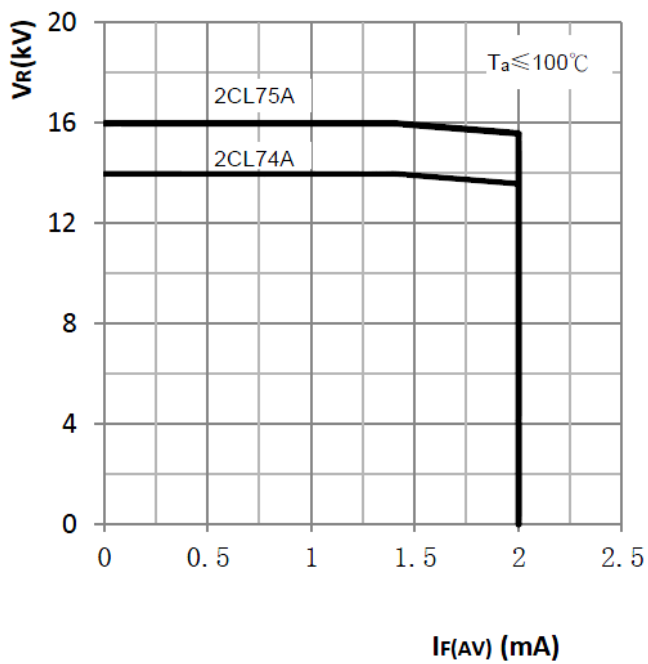


Figure 3. V_R - $I_{F(AV)}$ Curve


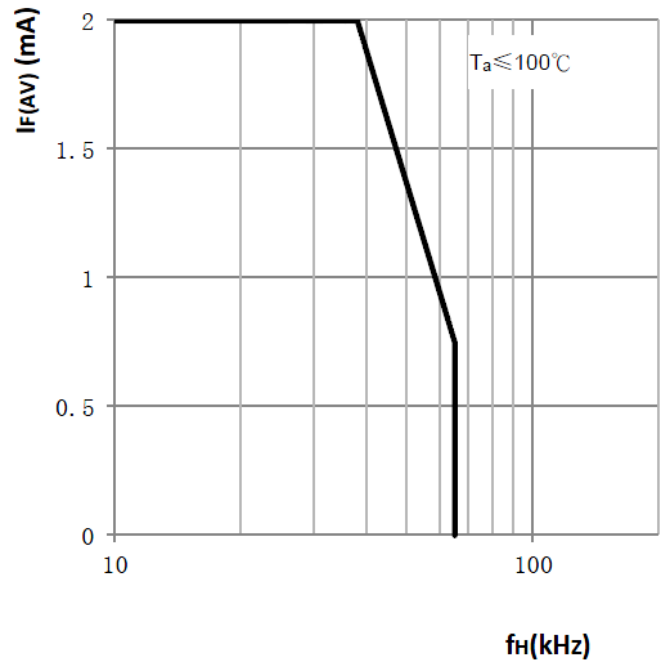


Figure 4. $I_{F(AV)}$ - f_H Curve



2CL74A THRU 2CL75A

■ Outline Dimensions

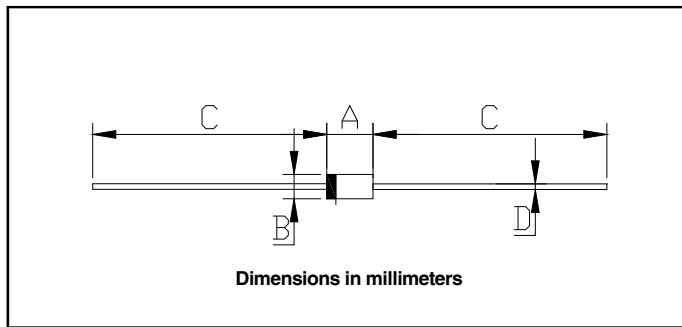

HV-04		
Dim	Min	Max
A	9.8	10.2
B	2.3	2.7
C	26	/
D	0.47	0.53



2CL74A THRU 2CL75A

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.