



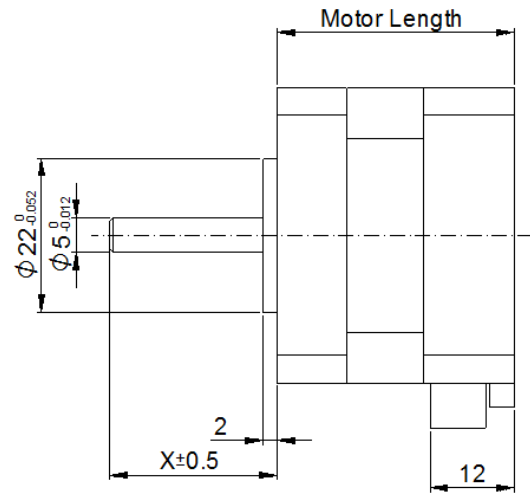

NEOCENE

2H42A | SPECIFICATION

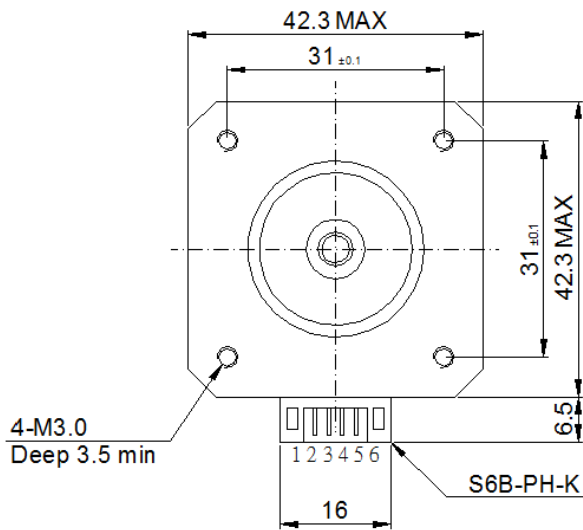

Model	2H42A(Bipolar)						
	Step Angle	Rated Voltage	Holding Torque	Rated Current	Winding Resistance	Inductance	Motor Length
	Deg	V	mN · m	A	Ω	mH	mm
2H42A6	1.8	2~36	200	0.7	12	15	26
2H42A7	1.8	2~36	260	0.4	30	37	34
			280	0.6	22	28	
2H42A8	1.8	2~36	400	0.5	25	50	40
			400	1.0	4.5	10	
2H42AA	1.8	2~36	450	1.5	2.0	2.8	48
			520	1.2	3.2	6.0	
2H42AC	1.8	2~36	600	1.5	2.0	3.2	60

Model	2H42A(Unipolar)						
	Step Angle	Rated Voltage	Holding Torque	Rated Current	Winding Resistance	Inductance	Motor Length
	Deg	V	mN · m	A	Ω	mH	mm
2H42A7	1.8	2~36	200	0.4	30	21	34
			200	1.2	2.1	1.2	
2H42A8	1.8	2~36	300	1.2	3.2	3.0	40