

PIC16C925/926 (Rev. B2 Silicon) Data Sheet Errata

The PIC16C925/926 Rev. B2 parts you have received conform functionally to the Device Data Sheet (DS39544A), except for the anomalies described below.

Revision B2 parts can be identified by the following package markings:

- PIC16C926-I/PTC03
- PIC16C926-I/PTC02
- PIC16C926-I/LC03
- PIC16C926-I/LC02

In addition, any PIC16C925/926 part with a date code of 0336XXX and later is B2 silicon.

All the problems listed here will be addressed in future revisions of the PIC16C925/926 silicon.

None.


Clarifications/Corrections to the Data Sheet:

In the Device Data Sheet (DS39544A), the following clarifications and corrections should be noted.

1. Module: I/O Ports

The block diagram for PORTC presented in Figure 4-5 of the Device Data Sheet (DS39544A) is incorrect. The correct block diagram is shown in Figure 1.

FIGURE 1: PORTC BLOCK DIAGRAM (PERIPHERAL OUTPUT OVERRIDE)

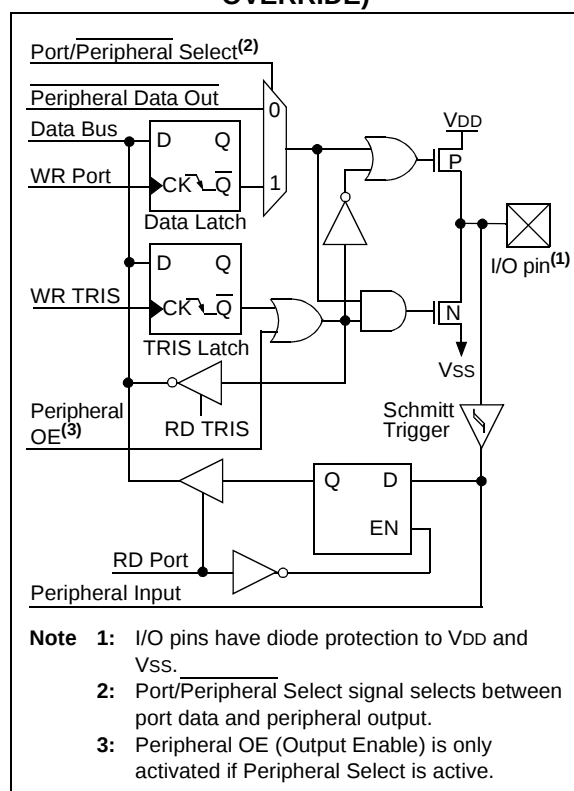

PIC16C925/926

2. Module: Memory (Special Function Registers)

The locations of the Special Function Registers, PMADR and PMDATH, are transposed throughout the Device Data Sheet. Specifically, PMADR is located at address 18Eh and PMDATH is located at address 18Dh.

This correction applies to the following specific locations, as well as anywhere else in the data sheet where the addresses of these registers may be referenced:

- Figure 2-3, page 13 (Register File Map – PIC16C925)
- Figure 2-4, page 14 (Register File Map – PIC16C926)
- Table 2-1, page 18 (Special Function Register Summary)
- Table 3-1, page 28 (Registers Associated with Program Memory)

3. Module: LCD

The illustrations of the LCD segment connections, their drive waveforms in various modes and their descriptive titles, have been revised. The changes have been made to make the illustrations and mode descriptions more consistent with those shown for the PIC16C923/924 family of devices in DS30444E.

The diagrams in Figure 11-2 through Figure 11-5 (below and the following pages) replace the corresponding diagrams in the Device Data Sheet (DS39544A).

FIGURE 11-2: WAVEFORMS IN STATIC DRIVE


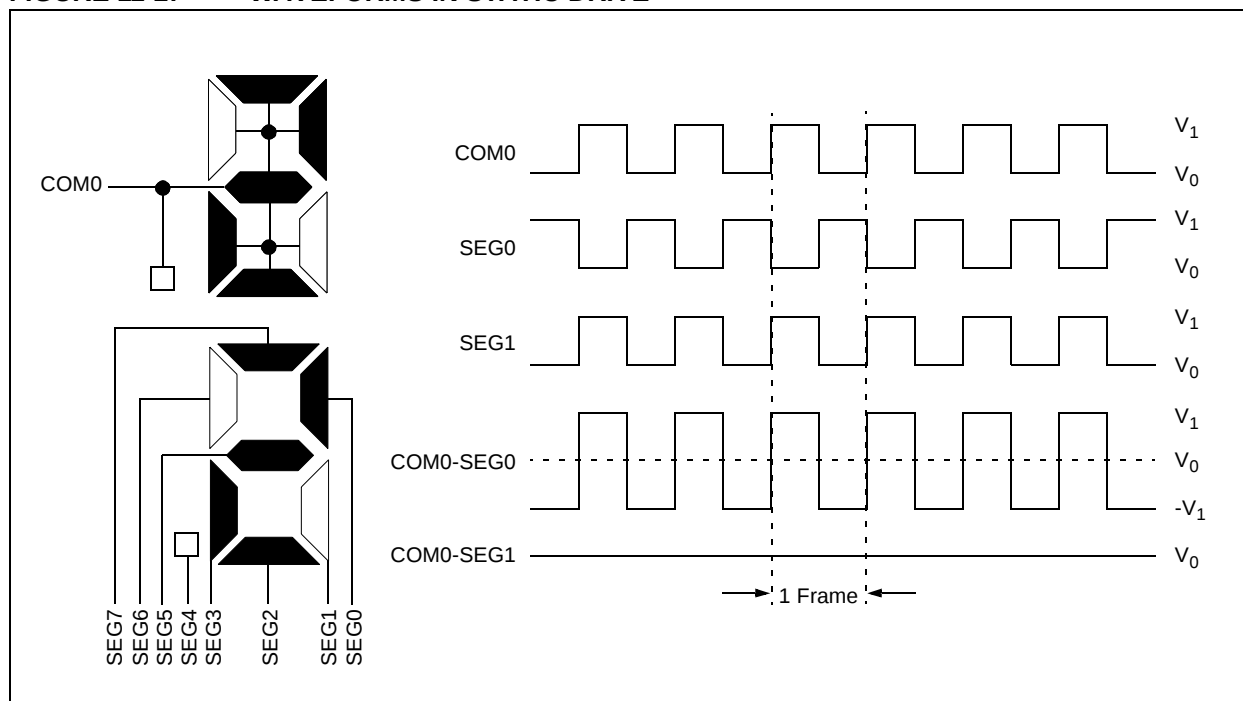


FIGURE 11-3: WAVEFORMS IN 1/2 MUX, 1/3 BIAS DRIVE

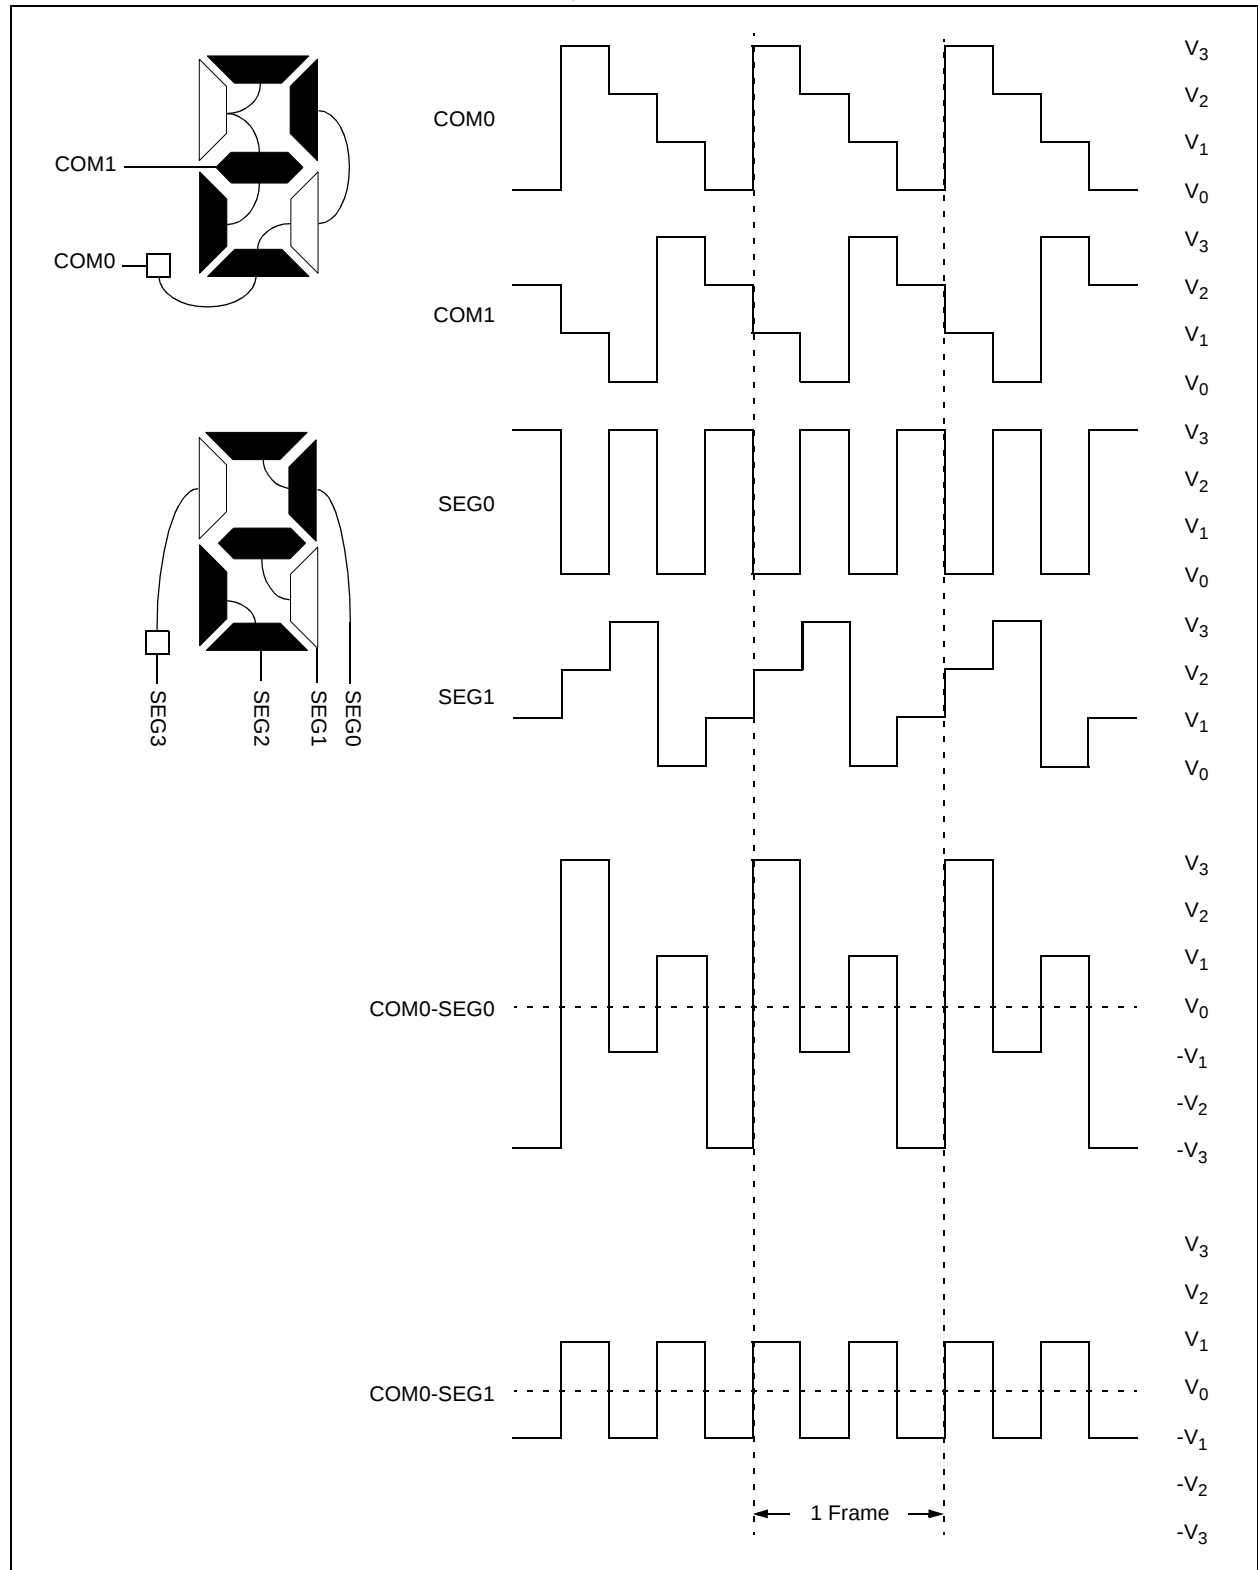

PIC16C925/926

FIGURE 11-4: WAVEFORMS IN 1/3 MUX, 1/3 BIAS


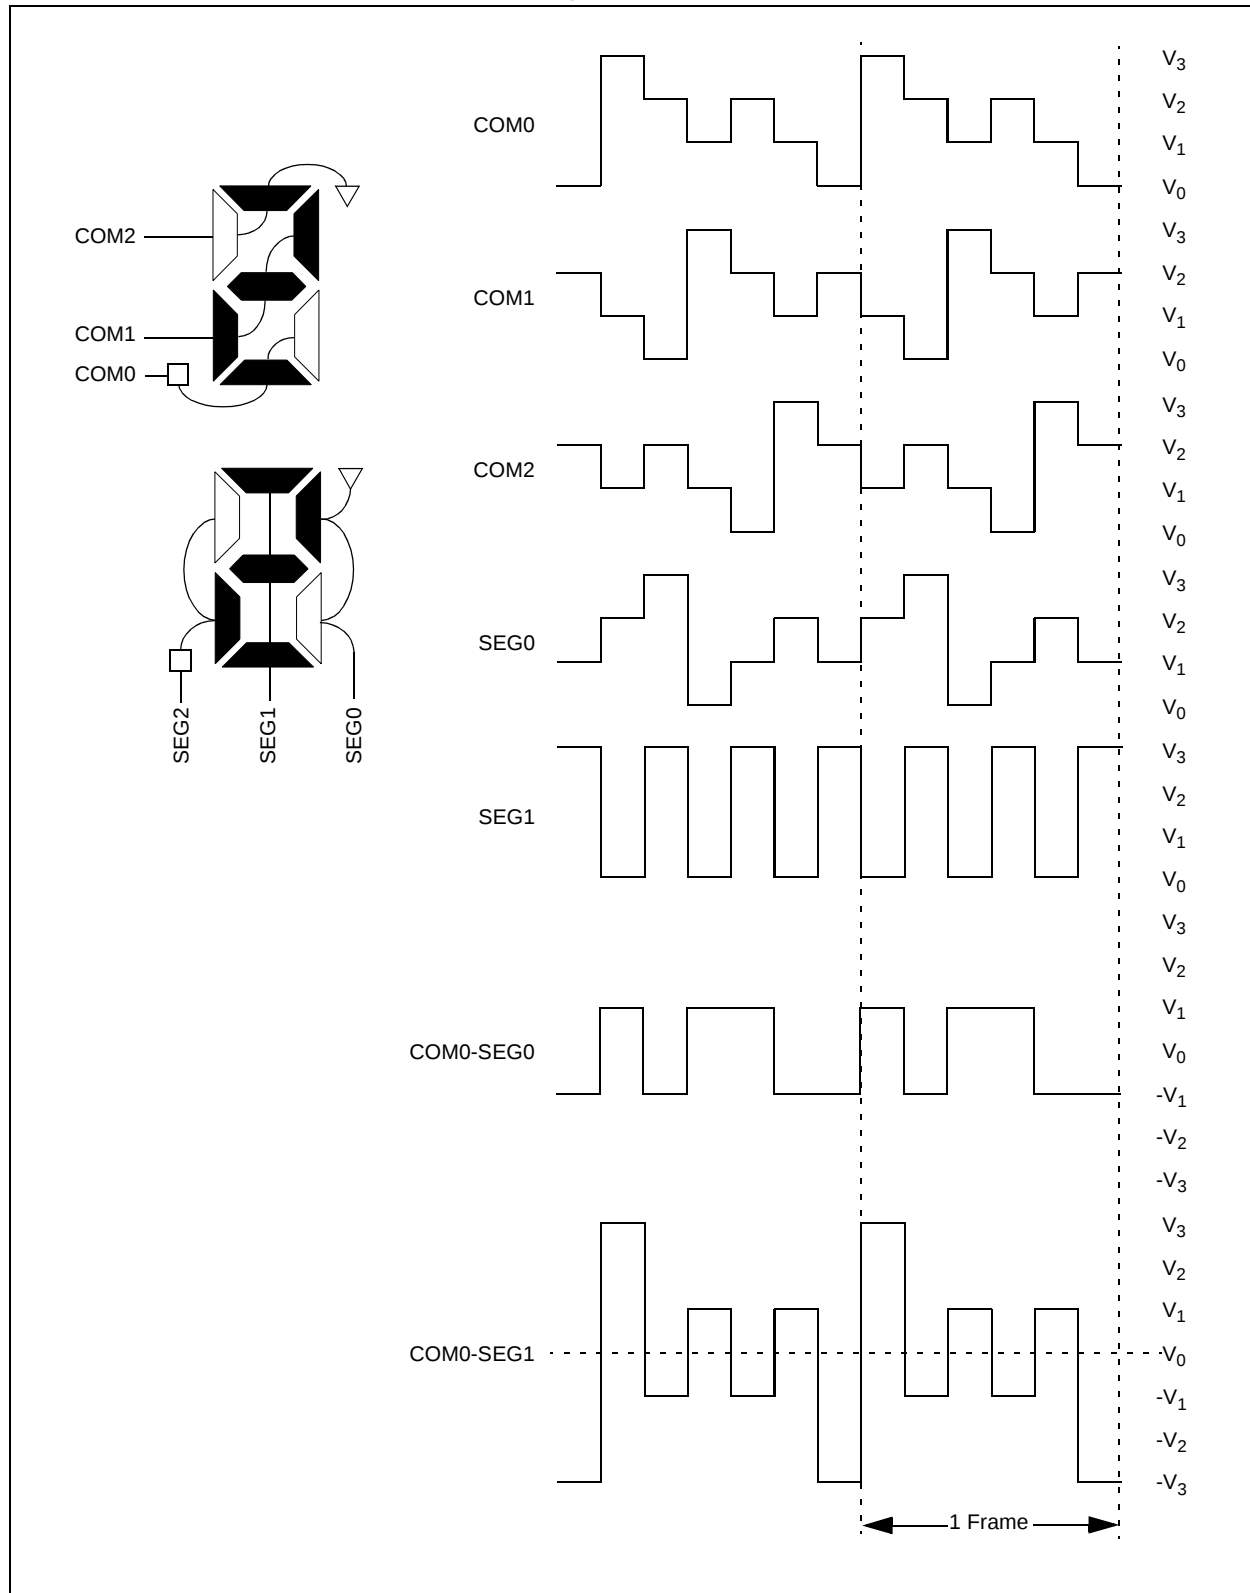


FIGURE 11-5: WAVEFORMS IN 1/4 MUX, 1/3 BIAS

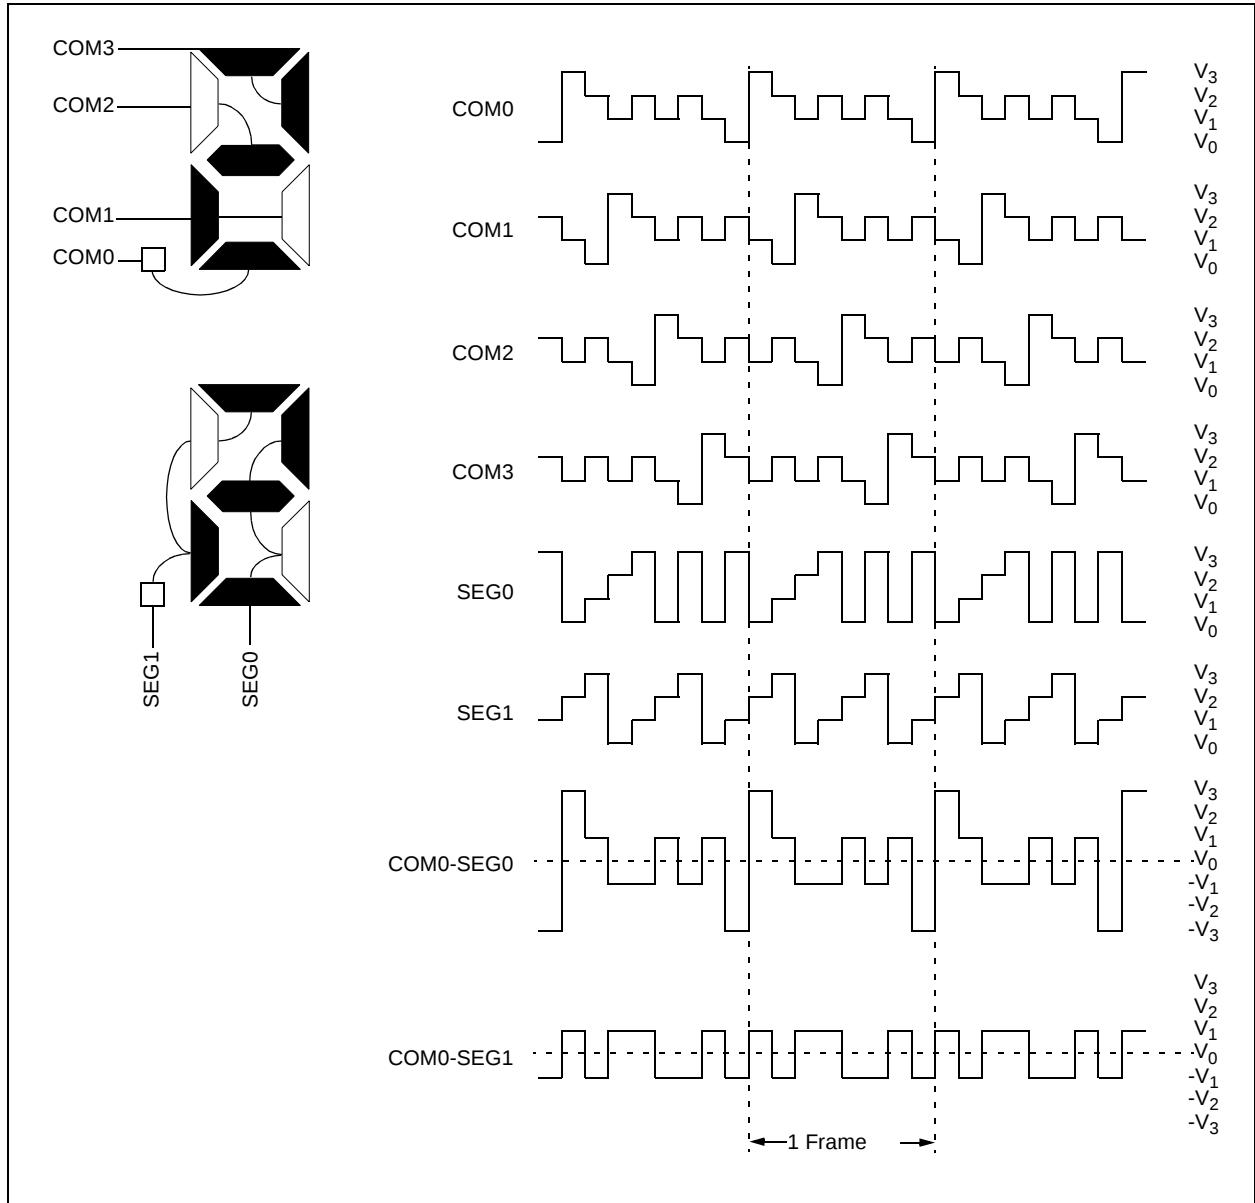

4. Module: LCD

The following text has been added to Section 11.5.1, "CHARGE PUMP":

The current source associated with the LCD module charge pump has a nominal output of 10 μA (see Figure 11-9). However, current regulation within individual devices may vary from approximately 7 to 15 μA . Since this current sets up the VLCDADJ voltage, variation in this current can create noticeable LCD contrast variations when using the LCD charge pump.


One method to compensate for the varying current regulation is to include a trim potentiometer in series between the VLCDADJ pin and ground. This method is currently noted in Figure 11-9 (page 95) of the Device Data Sheet.

To reduce the variation in the VLCDADJ voltage, without using a trim potentiometer or trim resistors (which must be manually adjusted), it is possible to use a band gap voltage reference circuit such as the 1.22V ZXRE1004 reference from Zetex, as shown in Figure 2. Resistor Rx placed in series with the band gap reference and the VLCDADJ pin can be used to set a voltage higher than the band gap reference voltage, if necessary. The voltage is determined by the formula:

$$V_{\text{LCDADJ}} = 1.22\text{V} + (I \times R)$$

As can be seen from this equation, a smaller series resistor, R, results in smaller variations in VLCDADJ voltage.

FIGURE 2: ALTERNATE METHOD FOR REDUCING VARIATIONS IN VLCDADJ VOLTAGE

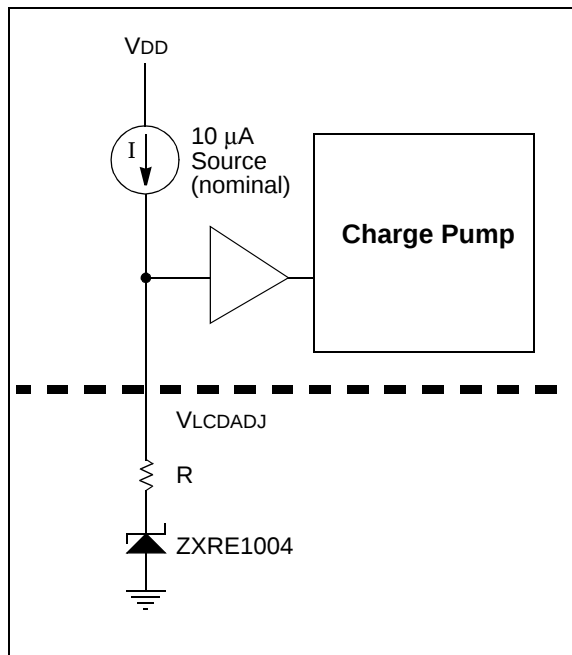

5. Module: VLcd Charge Pump

Parameter D250 in Table 15-2 of the Device Data Sheet has been updated to include the minimum and maximum values for IVADJ. Changes to the table are shown in bold text.

TABLE 15-2: VLCD CHARGE PUMP ELECTRICAL SPECIFICATIONS

Parameter No.	Symbol	Characteristic	Min	Typ	Max	Units	Conditions
D250	IVADJ	VLCDADJ Regulated Current Output	7	10	15	μA	
D252	Δ IVADJ/Δ VDD	VLCDADJ Current VDD Rejection	—	—	0.1	μA/V	
D265	VVADJ	VLCDADJ Voltage Limits	PIC16 C 925/926	1.0	—	2.3	V
			PIC16 LC 925/926	1.0	—	VDD – 0.7V	V VDD < 3V

6. Module: Timer1 Oscillator

Timer1 oscillator operating current has been improved on revision B2 devices. Section 15-1 has been updated to show the current typical and maximum values for parameter D025. Changes to the table are shown in bold text.

15.1 DC Characteristics

PIC16LC925/926 (Commercial, Industrial)			Standard Operating Conditions (unless otherwise stated) Operating temperature -40°C ≤ TA ≤ +85°C for industrial 0°C ≤ TA ≤ +75°C for commercial				
PIC16C925/926 (Commercial, Industrial)			Standard Operating Conditions (unless otherwise stated) Operating temperature -40°C ≤ TA ≤ +85°C for industrial 0°C ≤ TA ≤ +75°C for commercial				
Param No.	Symbol	Characteristic	Min	Typ†	Max	Units	Conditions
D025	ΔIT1OSC	Timer1 Oscillator PIC16LC925/926	—	3	6	μA	VDD = 3.0V
D025		Timer1 Oscillator PIC16C925/926	—	5	10	μA	VDD = 5.0V

† Data in "Typ" column is at 5V, 25°C unless otherwise stated. These parameters are for design guidance only and are not tested and apply only to revision B2 silicon.

APPENDIX A: REVISION HISTORY

Rev A Document (9/2003)

First revision of this document, Data Sheet Clarification issues 1 (I/O Ports), 2 (Memory), 3 (LCD), 4 (LCD), 5 (VLCD Charge Pump) and 6 (Timer1 Oscillator).

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is intended through suggestion only and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. No representation or warranty is given and no liability is assumed by Microchip Technology Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, under any intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, KEELOQ, MPLAB, PIC, PICmicro, PICSTART, PRO MATE and PowerSmart are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, microID, MXDEV, MXLAB, PICMASTER, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.


Accuron, Application Maestro, dsPICDEM, dsPICDEM.net, ECAN, ECONOMONITOR, FanSense, FlexROM, fuzzyLAB, In-Circuit Serial Programming, ICSP, ICEPIC, microPort, Migratable Memory, MPASM, MPLIB, MPLINK, MPSIM, PICC, PICkit, PICDEM, PICDEM.net, PowerCal, PowerInfo, PowerMate, PowerTool, rLAB, rPIC, Select Mode, SmartSensor, SmartShunt, SmartTel and Total Endurance are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

Serialized Quick Turn Programming (SQTP) is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2003, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

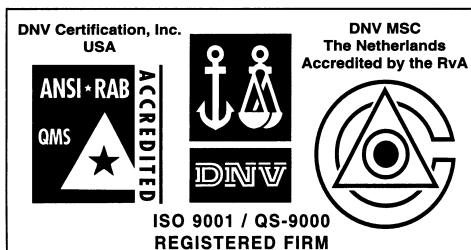

Microchip received QS-9000 quality system certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona in July 1999 and Mountain View, California in March 2002. The Company's quality system processes and procedures are QS-9000 compliant for its PICmicro® 8-bit MCUs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, non-volatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001 certified.



WORLDWIDE SALES AND SERVICE

AMERICAS

Corporate Office

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support: 480-792-7627
Web Address: <http://www.microchip.com>

Atlanta

3780 Mansell Road, Suite 130
Alpharetta, GA 30022
Tel: 770-640-0034
Fax: 770-640-0307

Boston

2 Lan Drive, Suite 120
Westford, MA 01886
Tel: 978-692-3848
Fax: 978-692-3821

Chicago

333 Pierce Road, Suite 180
Itasca, IL 60143
Tel: 630-285-0071
Fax: 630-285-0075

Dallas

4570 Westgrove Drive, Suite 160
Addison, TX 75001
Tel: 972-818-7423
Fax: 972-818-2924

Detroit

Tri-Atria Office Building
32255 Northwestern Highway, Suite 190
Farmington Hills, MI 48334
Tel: 248-538-2250
Fax: 248-538-2260

Kokomo

2767 S. Albright Road
Kokomo, IN 46902
Tel: 765-864-8360
Fax: 765-864-8387

Los Angeles

18201 Von Karman, Suite 1090
Irvine, CA 92612
Tel: 949-263-1888
Fax: 949-263-1338

Phoenix

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7966
Fax: 480-792-4338

San Jose

2107 North First Street, Suite 590
San Jose, CA 95131
Tel: 408-436-7950
Fax: 408-436-7955

Toronto

6285 Northam Drive, Suite 108
Mississauga, Ontario L4V 1X5, Canada
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Australia

Suite 22, 41 Rawson Street
Epping 2121, NSW
Australia
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing

Unit 915
Bei Hai Wan Tai Bldg.
No. 6 Chaoyangmen Beidajie
Beijing, 100027, No. China
Tel: 86-10-85282100
Fax: 86-10-85282104

China - Chengdu

Rm. 2401-2402, 24th Floor,
Ming Xing Financial Tower
No. 88 TIDU Street
Chengdu 610016, China
Tel: 86-28-86766200
Fax: 86-28-86766599

China - Fuzhou

Unit 28F, World Trade Plaza
No. 71 Wusi Road
Fuzhou 350001, China
Tel: 86-591-7503506
Fax: 86-591-7503521

China - Hong Kong SAR

Unit 901-6, Tower 2, Metroplaza
223 Hing Fong Road
Kwai Fong, N.T., Hong Kong
Tel: 852-2401-1200
Fax: 852-2401-3431

China - Shanghai

Room 701, Bldg. B
Far East International Plaza
No. 317 Xian Xia Road
Shanghai, 200051
Tel: 86-21-6275-5700
Fax: 86-21-6275-5060

China - Shenzhen

Rm. 1812, 18/F, Building A, United Plaza
No. 5022 Binhe Road, Futian District
Shenzhen 518033, China
Tel: 86-755-82901380
Fax: 86-755-8295-1393

China - Shunde

Room 401, Hongjian Building
No. 2 Fengxiangnan Road, Ronggui Town
Shunde City, Guangdong 528303, China
Tel: 86-765-8395507 Fax: 86-765-8395571

China - Qingdao

Rm. B505A, Fullhope Plaza,
No. 12 Hong Kong Central Rd.
Qingdao 266071, China
Tel: 86-532-5027355 Fax: 86-532-5027205

India

Divyasree Chambers
1 Floor, Wing A (A3/A4)
No. 11, O'Shaughnessy Road
Bangalore, 560 025, India
Tel: 91-80-2290061 Fax: 91-80-2290062

Japan

Benex S-1 6F
3-18-20, Shinyokohama
Kohoku-Ku, Yokohama-shi
Kanagawa, 222-0033, Japan
Tel: 81-45-471- 6166 Fax: 81-45-471-6122

Korea

168-1, Youngbo Bldg. 3 Floor
Samsung-Dong, Kangnam-Ku
Seoul, Korea 135-882
Tel: 82-2-554-7200 Fax: 82-2-558-5932 or
82-2-558-5934

Singapore

200 Middle Road
#07-02 Prime Centre
Singapore, 188980
Tel: 65-6334-8870 Fax: 65-6334-8850

Taiwan

Kaohsiung Branch
30F - 1 No. 8
Min Chuan 2nd Road
Kaohsiung 806, Taiwan
Tel: 886-7-536-4818
Fax: 886-7-536-4803

Taiwan

Taiwan Branch
11F-3, No. 207
Tung Hua North Road
Taipei, 105, Taiwan
Tel: 886-2-2717-7175 Fax: 886-2-2545-0139

EUROPE

Austria

Durisolstrasse 2
A-4600 Wels
Austria
Tel: 43-7242-2244-399
Fax: 43-7242-2244-393

Denmark

Regus Business Centre
Lautrup høj 1-3
Ballerup DK-2750 Denmark
Tel: 45-4420-9895 Fax: 45-4420-9910

France

Parc d'Activite du Moulin de Massy
43 Rue du Saule Trapu
Batiment A - 1er Etage
91300 Massy, France
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany

Steinheilstrasse 10
D-85737 Ismaning, Germany
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Italy

Via Quasimodo, 12
20025 Legnano (MI)
Milan, Italy
Tel: 39-0331-742611
Fax: 39-0331-466781

Netherlands

P. A. De Biesbosch 14
NL-5152 SC Drunen, Netherlands
Tel: 31-416-690399
Fax: 31-416-690340

United Kingdom

505 Eskdale Road
Winnersh Triangle
Wokingham
Berkshire, England RG41 5TU
Tel: 44-118-921-5869
Fax: 44-118-921-5820

07/28/03