

2N3906

PNP GENERAL PURPOSE SWITCHING TRANSISTOR

VOLTAGE 40 Volts **POWER** 625 mWatts

TO-92 Unit: inch (mm)

FEATURES

- PNP epitaxial silicon, planar design
- Collector-emitter voltage $V_{CE} = 40V$
- Collector current $I_C = -200mA$
- Pb free product are available :99% Sn above can meet RoHS environment substance directive request


MECHANICAL DATA

Case: TO-92

Terminals: Solderable per MIL-STD-750, Method 2026

Approx Weight : 0.02grams

Marking : S2A

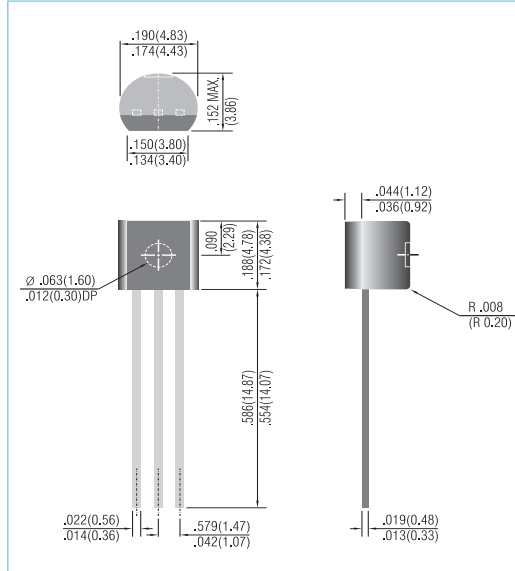

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Collector - Emitter Voltage	V_{CEO}	-40	V
Collector - Base Voltage	V_{CBO}	-40	V
Emitter - Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-200	mA
Max Power Dissipation	P_{TOT}	625	mW
Storage Temperature	T_{STG}	-55 to 150	°C
Junction Temperature	T_J	-55 to 150	°C

THERMAL CHARACTERISTICS


PARAMETER	SYMBOL	VALUE	UNITS
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	°C / W

2N3906

ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector - Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1.0mA, I_B=0$	-40	-	-	V
Collector - Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=-10\mu A, I_E=0$	-40	-	-	V
Emitter - Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	-5.0	-	-	V
Base Cutoff Current	I_{BL}	$V_{CE}=-30V, V_{EB}=-3.0V$	-	-	-50	nA
Collector Cutoff Current	I_{CEX}	$V_{CE}=-30V, V_{EB}=-3.0V$	-	-	-50	nA
DC Current Gain	h_{FE}	$I_C=-0.1mA, V_{CE}=-1.0V$ $I_C=-1.0mA, V_{CE}=-1.0V$ $I_C=-10mA, V_{CE}=-1.0V$ $I_C=-50mA, V_{CE}=-1.0V$ $I_C=-100mA, V_{CE}=-1.0V$	60 80 100 60 30	- - - - -	- - 300 - -	-
Collector - Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=-10mA, I_B=-1.0mA$ $I_C=-50mA, I_B=-5.0mA$	- -	- -	-0.25 -0.4	V
Base - Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=-10mA, I_B=-1.0mA$ $I_C=-50mA, I_B=-5.0mA$	-0.65 -	- -	-0.85 -0.95	V
Collector-Base Capacitance	C_{CBO}	$V_{CB}=-5.0V, I_E=0, f=1MHz$	-	-	4.5	pF
Emitter - Base Capacitance	C_{EBO}	$V_{CB}=-0.5V, I_C=0, f=1MHz$	-	-	10	pF
Delay Time	t_d	$V_{CC}=-3V, V_{BE}=-0.5V,$ $I_C=-10mA, I_B=-1mA$	-	-	35	ns
Rise Time	t_r		-	-	35	ns
Storage Time	t_s	$V_{CC}=-3V, I_C=-10mA$ $I_{B1}=I_{B2}=-1mA$	-	-	225	ns
Fall Time	t_f		-	-	75	ns

SWITCHING TIME EQUIVALENT TEST CIRCUITS

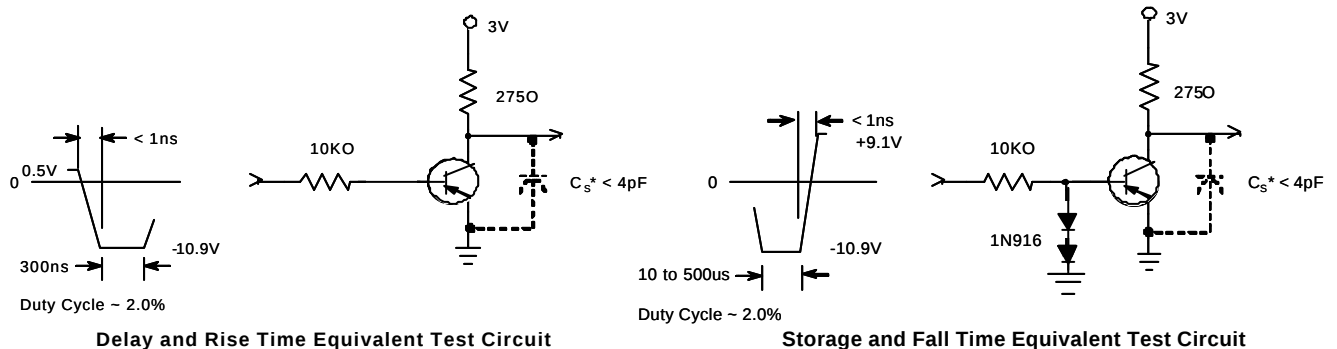

2N3906

ELECTRICAL CHARACTERISTICS CURVES

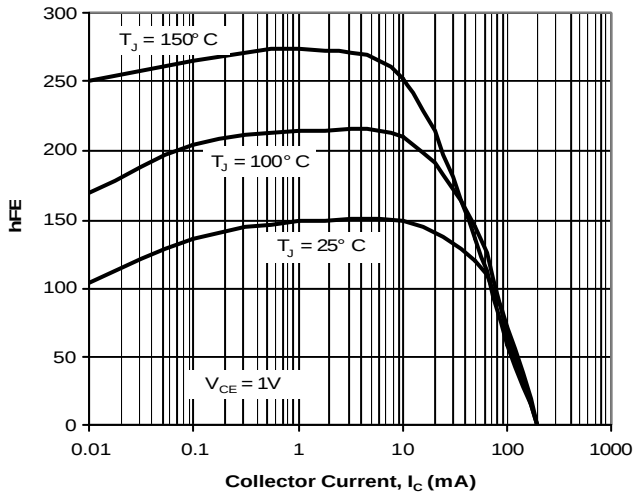


Fig. 1. Typical h_{FE} vs. Collector Current

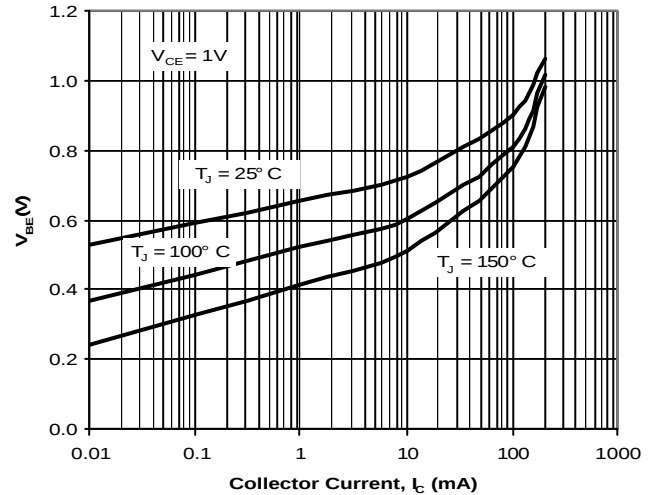


Fig. 2. Typical V_{BE} vs. Collector Current

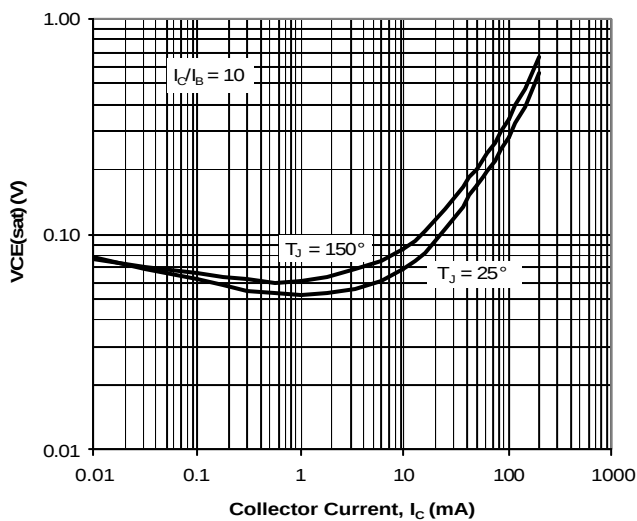


Fig. 3. Typical $V_{CE(sat)}$ vs. Collector Current

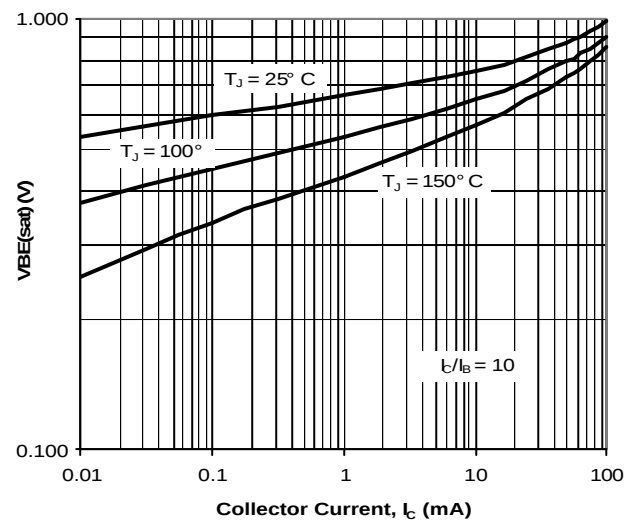


Fig. 4. Typical $V_{BE(sat)}$ vs. Collector Current


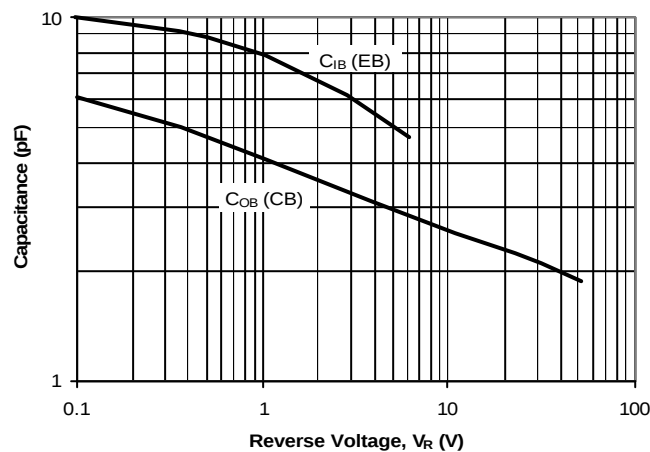


Fig. 5. Typical Capacitances vs. Reverse Voltage

2N3906

TO-92 Case Outline

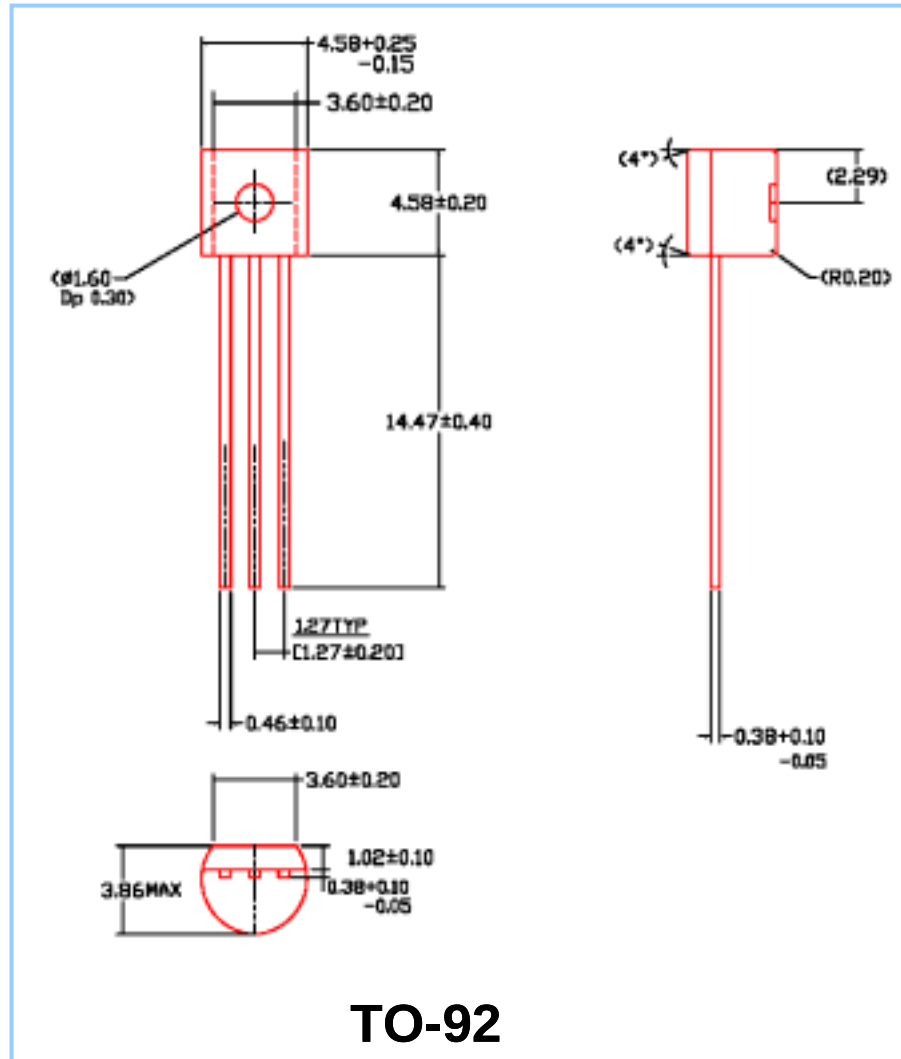

LEGAL STATEMENT

Copyright PanJit International, Inc 2005

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.