
2N50K-TA

Preliminary ***Power MOSFET***

2A, 500V N-CHANNEL POWER MOSFET

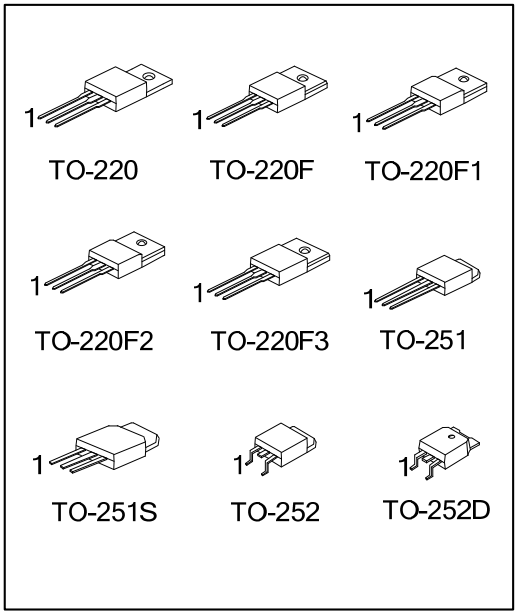

■ DESCRIPTION


The UTC **2N50K-TA** is an N-channel mode power MOSFET using UTC's advanced technology to provide customers with planar stripe and DMOS technology. This technology allows a minimum on-state resistance and superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode.

The UTC **2N50K-TA** is generally applied in high efficiency switch mode power supplies, active power factor correction and electronic lamp ballasts based on half bridge topology.

■ FEATURES

* $R_{DS(ON)}$ < 4.9Ω @ V_{GS}=10V, I_D=1A
* High Switching Speed
* 100% Avalanche Tested

■ SYMBOL




Copyright © 2014 Unisonic Technologies Co., Ltd

■ ORDERING INFORMATION


Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2N50KL-TA3-T	2N50KG-TA3-T	TO-220	G	D	S	Tube
2N50KL-TF3-T	2N50KG-TF3-T	TO-220F	G	D	S	Tube
2N50KL-TF1-T	2N50KG-TF1-T	TO-220F1	G	D	S	Tube
2N50KL-TF2-T	2N50KG-TF2-T	TO-220F2	G	D	S	Tube
2N50KL-TF3T-T	2N50KG-TF3T-T	TO-220F3	G	D	S	Tube
2N50KL-TM3-T	2N50KG-TM3-T	TO-251	G	D	S	Tube
2N50KL-TMS-T	2N50KG-TMS-T	TO-251S	G	D	S	Tube
2N50KL-TN3-R	2N50KG-TN3-R	TO-252	G	D	S	Tape Reel
2N50KL-TND-R	2N50KG-TND-R	TO-252D	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

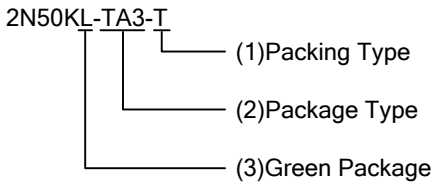

(1) T: Tube, R: Tape Reel
(2) TA3: TO-220, TF3: TO-220F, TF1: TO-220F1, TF2: TO-220F2, TF3T: TO-220F3, TM3: TO-251, TMS: TO-251S, TN3: TO-252, TND: TO-252D
(3) L: Lead Free, G: Halogen Free and Lead Free

■ MARKING

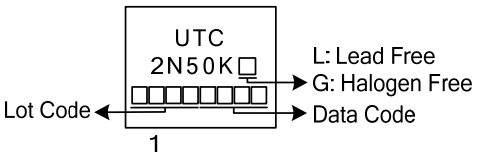

■ ABSOLUTE MAXIMUM RATINGS (T_C=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	500	V
Gate-Source Voltage		V_{GSS}	±30	V
Drain Current	Continuous (T_C=25°C)	I_D	2 (Note 3)	A
	Pulsed (Note 2)	I_{DM}	8 (Note 3)	A
Avalanche Current (Note 2)		I_{AR}	2	A
Avalanche Energy	Single Pulsed	E_{AS}	82	mJ
	Repetitive (Note 4)	E_{AR}	3.3	mJ
Power Dissipation (T_C=25°C)	TO-220	P_D	52	W
	TO-220F/TO-220F1 TO-220F3		23	
	TO-220F2		23.2	
	TO-251/TO-251S TO-252/TO-252D		50	
Derate above 25°C	TO-220		0.43	W/°C
	TO-220F/TO-220F1 TO-220F3		0.18	
	TO-220F2		0.185	
	TO-251/TO-251S TO-252/TO-252D		0.4	
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-55~+150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Repetitive Rating: Pulse width limited by maximum junction temperature
3. Drain current limited by maximum junction temperature
4. Pulse Test: Pulse width ≤ 300μs, Duty cycle ≤ 2%
5. L=41mH, I_{AS}=2.0A, V_{DD}=50V, R_G=25 Ω, Starting T_J = 25°C

■ THERMAL DATA


PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/TO-220F TO-220F1/TO-220F2 TO-220F3	θ_{JA}	62.5	°C/W
	TO-251/TO-251S TO-252/TO-252D		110	
Junction to Case	TO-220	θ_{JC}	2.36	°C/W
	TO-220F/TO-220F1 TO-220F3		5.5	
	TO-220F2		5.4	
	TO-251/TO-251S TO-252/TO-252D		2.5	

■ ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise noted)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV_{DSS}	I_D=250μA, V_{GS}=0V	500			V
Drain-Source Leakage Current		I_{DSS}	V_{DS}=500V, V_{GS}=0V			25	μA
Gate- Source Leakage Current	Forward	I_{GSS}	V_{GS}=+30V, V_{DS}=0V			+100	nA
	Reverse		V_{GS}=-30V, V_{DS}=0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		$V_{GS(TH)}$	V_{DS}=V_{GS}, I_D=250μA	3.0		5.0	V
Static Drain-Source On-State Resistance		$R_{DS(ON)}$	V_{GS}=10V, I_D=1A		2.6	4.9	Ω
DYNAMIC PARAMETERS							
Input Capacitance		C_{ISS}	V_{GS}=0V, V_{DS}=25V, f=1.0MHz		200		pF
Output Capacitance		C_{OSS}			39		pF
Reverse Transfer Capacitance		C_{RSS}			16		pF
SWITCHING PARAMETERS							
Total Gate Charge		Q_G	V_{GS}=10V, V_{DS}=400V, I_D=2A (Note 1, 2)		12	25	nC
Gate to Source Charge		Q_{GS}			5.6	3	nC
Gate to Drain Charge		Q_{GD}			2	15	nC
Turn-ON Delay Time		$t_{D(ON)}$	V_{DD}=250V, I_D=2A, R_G=25Ω (Note 1, 2)		20		ns
Rise Time		t_R			40		ns
Turn-OFF Delay Time		$t_{D(OFF)}$			84		ns
Fall-Time		t_F			38		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I_S				2	A
Maximum Body-Diode Pulsed Current		I_{SM}				8	A
Drain-Source Diode Forward Voltage		V_{SD}	I_S=2A, V_{GS}=0V			1.2	V

Notes: 1. Pulse Test: Pulse width ≤ 300μs, Duty cycle ≤ 2%
2. Essentially independent of operating temperature


■ TEST CIRCUITS AND WAVEFORMS

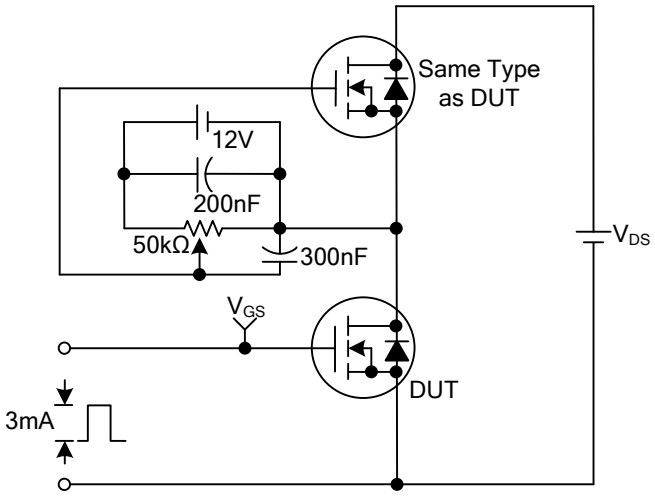


Gate Charge Test Circuit

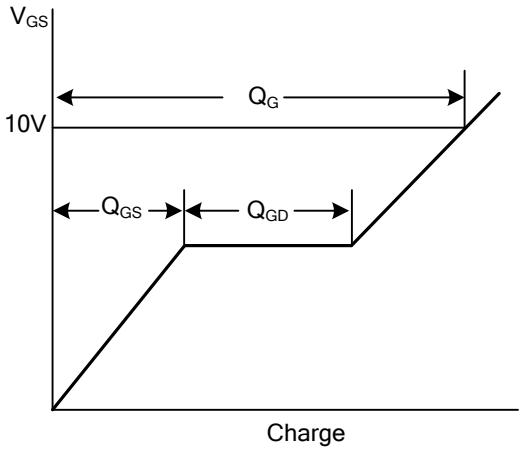


Gate Charge Waveforms

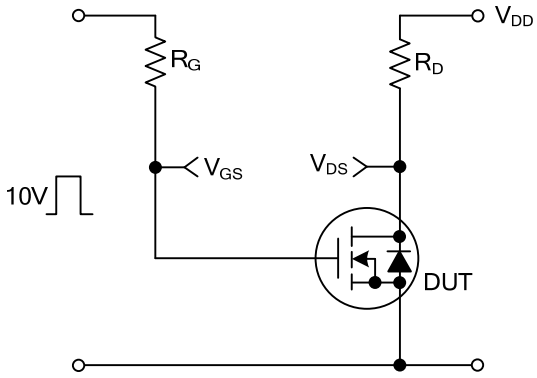


Resistive Switching Test Circuit

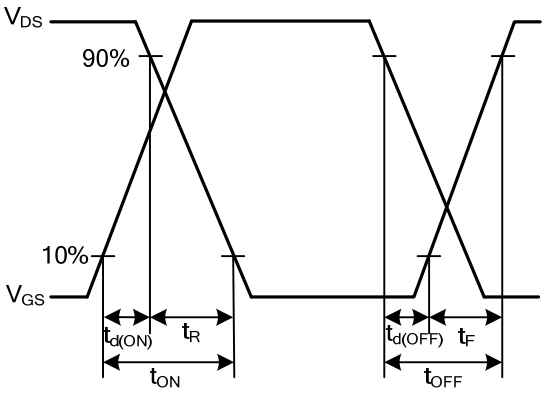

Resistive Switching Waveforms

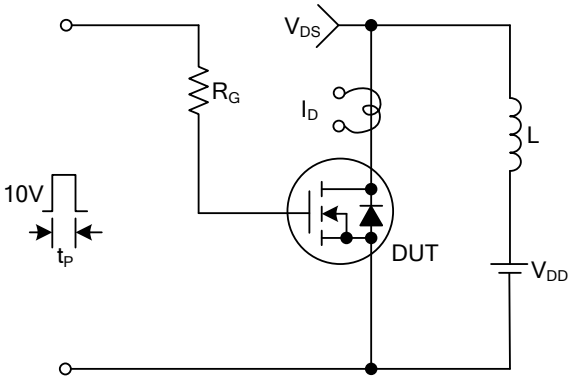


Unclamped Inductive Switching Test Circuit

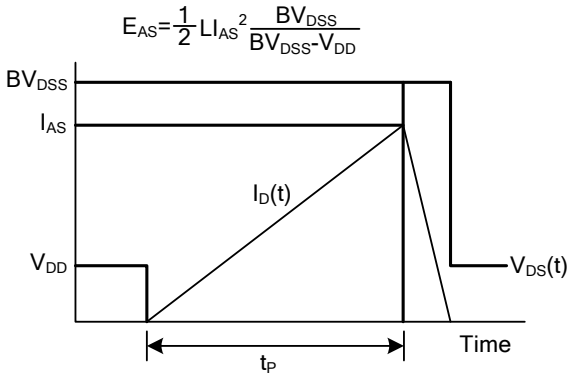


Unclamped Inductive Switching Waveforms

■ TEST CIRCUITS AND WAVEFORMS(Cont.)

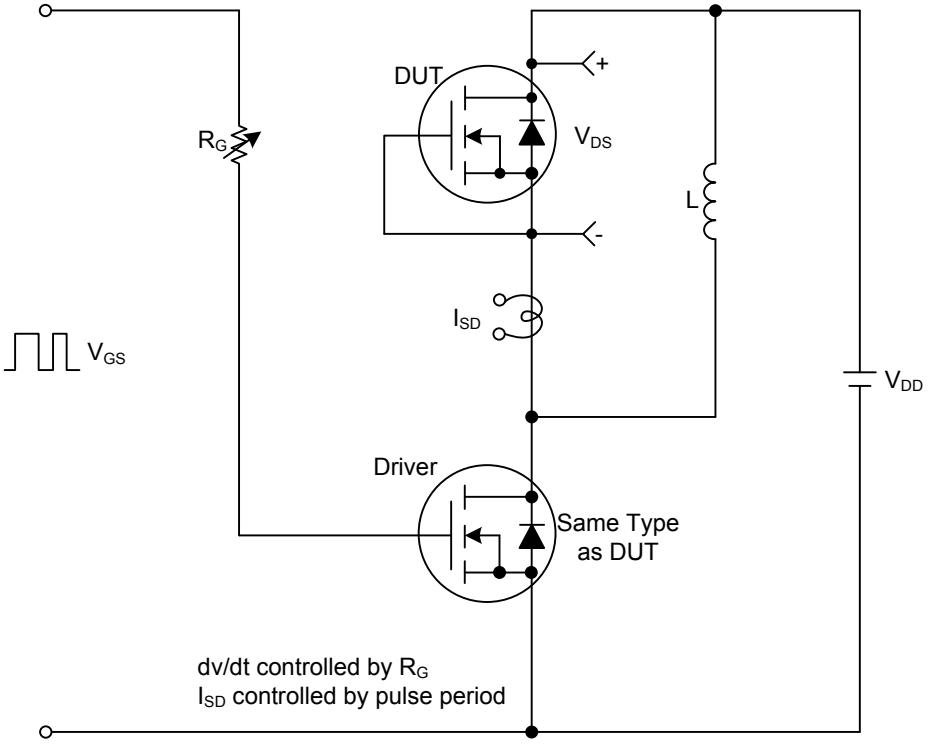

Peak Diode Recovery dv/dt Test Circuit & Waveforms

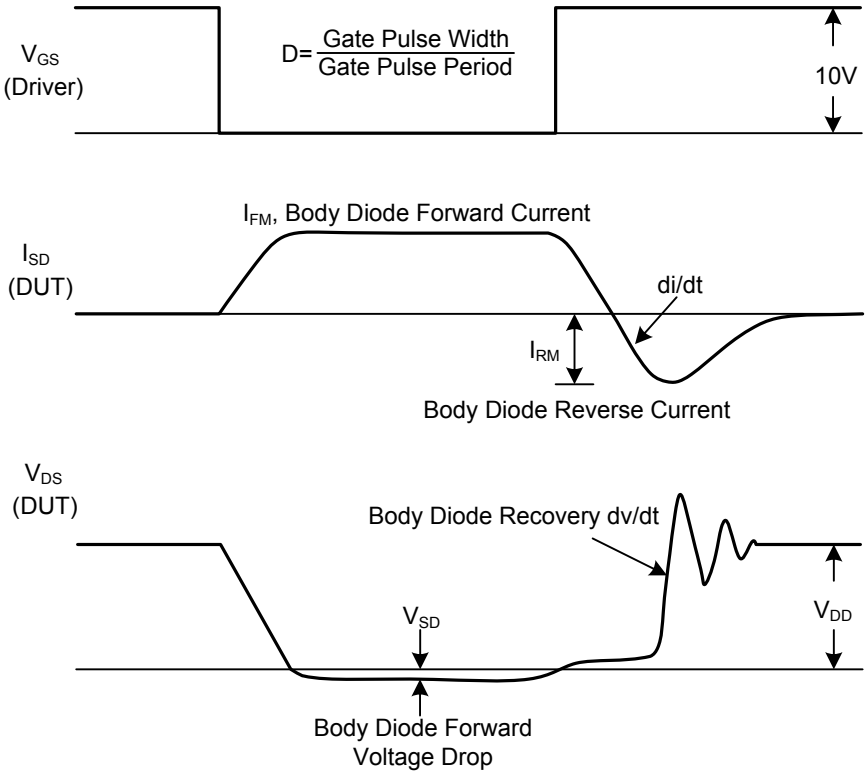

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.