Tel : 82-32-817-4325
Fax : 82-32-817-4329

Resistors And
Resistive Applications

SH-Fm Shunt Resistors

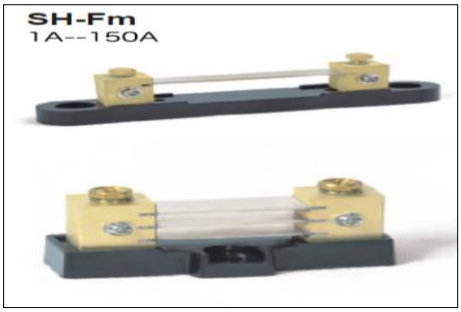

USE :

The interchangeable shunts are used to multiply the measuring range of current of measuring instruments.

APPLICATION :

For Telecommunications equipment, Electric cars, Aerospace, Charging station, Electroplating Power Equipment, Instrument and meter, Dc power system, etc.

■ GENERAL SPECIFICATIONS

Model	Rated Current[A]	Rated Voltage[mV]	Resistance Range[mΩ]
SH-Fm 1A~150A	1~50 51~2500	10~800 10~300	10~16 0.2~0.12

■ CHARACTERISTICS

Ambient condition	-25℃~40℃
Relative humidity	≤80%(35℃)

■ DIMENSIONS

SH-Fm 1A--150A

60mV,75mV,100mV

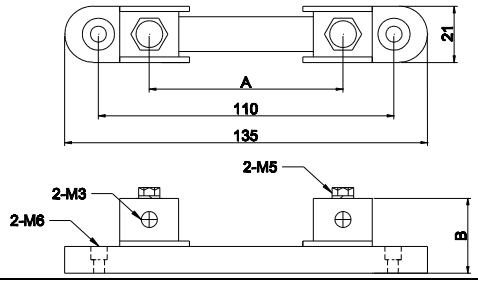

25~50mV

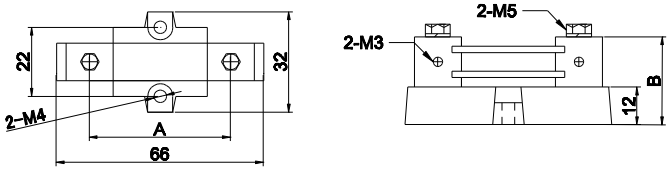

Model	Dimensions(mm)							
	25~50mV		60mV		75mV		100mV	
	A	B	A	B	A	B	A	B
1A-80A			63	28	78	28	78	28
100A-125A				30		30		30
150A				33		33		33
1A-125A	45	28						
150A		30						

■ ORDERING PROCEDURE EXAMPLE

