SI-3000KS Series Surface-Mount, Low Current Consumption, Low Dropout Voltage

■Features

- Compact surface-mount package (SOP8)
- Output current: 1.0 A
- Compatible with low ESR capacitor
- Low circuit current at output OFF Iq ≤ 350 μA (I_O = 0 A, V_C = 2 V)
- Low current consumption Iq (OFF) ≤ 1 μA (V_C = 0 V)
- Low dropout voltage V_{DIF} ≤ 0.6 V (I_O = 1 A)
- 3 types of output voltages (2.5 V, 3.3 V, and variable type) available
- Output ON/OFF control terminal voltage compatible with LS-TTL
- Built-in drooping-type-overcurrent and thermal protection circuits

■Absolute Maximum Ratings

(T_a=25°C)

Parameter	Symbol	Ratings	Unit
DC Input Voltage	V_{IN}*1	17	V
Output Control Terminal Voltage	V_C	V_{IN}	V
DC Output Current	I_O*1	1.0	A
Power Dissipation	P_D*1, *2	0.76	W
Junction Temperature	T_j	–40 to +125	°C
Storage Temperature	T_{stg}	–40 to +125	°C
Thermal Resistance (Junction to Ambient Air)	$\theta_{j\text{-}a}$	130	°C/W
Thermal resistance (Junction to Lead (pin 7))	$\theta_{j\text{-}L}$	22	°C/W

*1: V_{IN} (max) and I_O (max) are restricted by the relation PD = (V_{IN} - V_O) × I_O. Please calculate these values referring to the Copper laminate area vs. Power dissipation data as shown hereinafter.

*2: When mounted on a glass epoxy board of 1600 mm^2 (copper laminate area 2%).

■Applications

- Local power supplies
- Battery-driven electronic equipment

■Electrical Characteristics

(T_a=25°C, V_C=2 V, unless otherwise specified)

Parameter		Symbol	Ratings									Unit
			SI-3012KS (variable type)			SI-3025KS			SI-3033KS			
			min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	
Input Voltage		V_{IN}	2.4			*1			*1			V
Output Voltage (Reference voltage V_{ADJ} for SI-3012KS)		V_O (V_{ADJ})	1.24	1.28	1.32	2.45	2.50	2.55	3.234	3.300	3.366	V
		Conditions	V_{IN}=3.3V, I_O=10mA			V_{IN}=3.3V, I_O=10mA			V_{IN}=5V, I_O=10mA			
Dropout Voltage		V_{DIF}			0.3			0.4			0.4	V
		Conditions	I_O=0.5A (V_O=2.5V)			I_O=0.5A			I_O=0.5A			
					0.6			0.6			0.6	
		Conditions	I_O=1A (V_O=2.5V)			I_O=1A			I_O=1A			
Line Regulation		ΔV_{OLINE}			10			10			15	mV
		Conditions	V_{IN}=3.3 to 8V, I_O=10mA (V_O=2.5V)			V_{IN}=3.3 to 8V, I_O=10mA			V_{IN}=5 to 10V, I_O=10mA			
Load Regulation		ΔV_{OLOAD}			40			40			50	mV
		Conditions	V_{IN}=3.3V, I_O=0 to 1A (V_O=2.5V)			V_{IN}=3.3V, I_O=0 to 1A			V_{IN}=5V, I_O=0 to 1A			
Quiescent Circuit Current		I_q			350			350			350	μA
		Conditions	V_{IN}=3.3V, I_O=0A, V_C=2V, R2=24kΩ			V_{IN}=3.3V, I_O=0A, V_C=2V			V_{IN}=5V, I_O=0A, V_C=2V			
Circuit Current at Output OFF		I_q (OFF)			1			1			1	μA
		Conditions	V_{IN}=3.3V, V_C=0V			V_{IN}=3.3V, V_C=0V			V_{IN}=5V, V_C=0V			
Temperature Coefficient of Output Voltage		$\Delta V_O/\Delta T_a$		±0.3			±0.3			±0.3		mV/°C
		Conditions	T_j=0 to 100°C (V_O=2.5V)			T_j=0 to 100°C			T_j=0 to 100°C			
Ripple Rejection		R_{REJ}		55			55			55		dB
		Conditions	V_{IN}=3.3V, f=100 to 120Hz (V_O=2.5V)			V_{IN}=3.3V, f=100 to 120Hz			V_{IN}=5V, f=100 to 120Hz			
Overcurrent Protection Starting Current*2		I_{S1}	1.2			1.2			1.2			A
		Conditions	V_{IN}=3.3V (V_O=2.5V)			V_{IN}=3.3V			V_{IN}=5V			
V_C Terminal	Control Voltage (Output ON)*3	V_C, IH	2.0			2.0			2.0			V
	Control Voltage (Output OFF)	V_C, IL			0.8			0.8			0.8	
	Control Current (Output ON)	I_C, IH			40			40			40	μA
		Conditions	V_C=2V									
	Control Current (Output OFF)	I_C, IL	–5	0		–5	0		–5	0		μA
		Conditions	V_C=0V									


*1: Refer to the Dropout Voltage parameter.

*2: The I_{S1} is specified at the 5% drop point of output voltage V_O on the condition that V_{IN} = V_O + 1 V, and I_O = 10 mA.

*3: Output is OFF when the output control terminal V_C is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.

■External Dimensions (SOP8)

(Unit : mm)

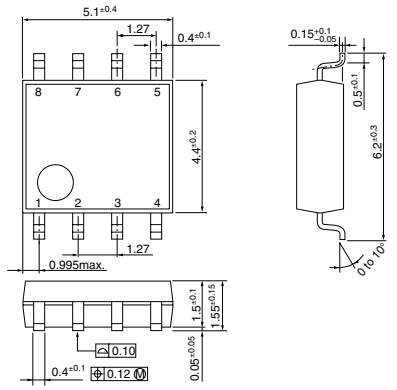


Pin Assignment
① V_C
② V_{IN}
③ V_O
④ Sence (ADJ for SI-3012KS)
⑤ GND
⑥ GND
⑦ GND
⑧ GND


Plastic Mold Package Type
Flammability: UL 94V-0
Product Mass: Approx. 0.1 g

■Block Diagram

●SI-3012KS

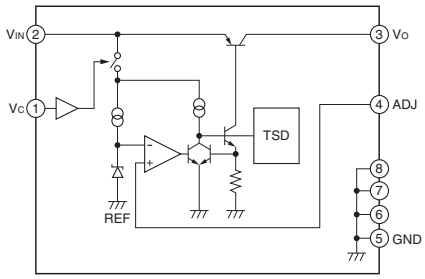


●SI-3025KS, SI-3033KS

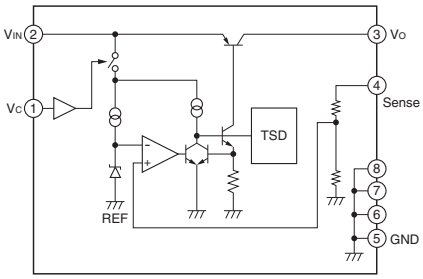


■Typical Connection Diagram

●SI-3012KS

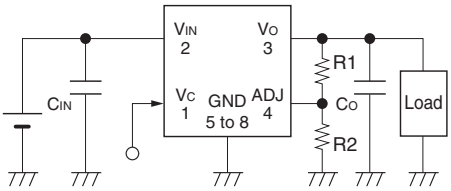

●SI-3025KS, SI-3033KS

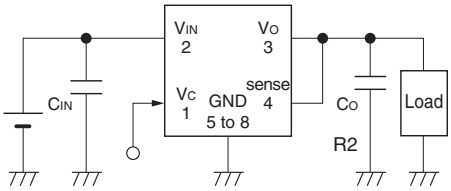


R_1, R_2: Output voltage setting resistors
The output voltage can be set by connecting R_1 and R_2 as shown above.
The recommended value of R_2 is 24 kΩ .

$R1=(V_O–V_{ADJ})÷(V_{ADJ}/R2)$


C_{IN}: Input capacitor (22 μF or larger)
C_O: Output capacitor (22 μF or larger)
For SI-3000KS series, Co has to be a low ESR capacitor.
When using the electrolytic capacitor, the SI-3000KS series may oscillate at a low temperature.

■Reference Data

Copper Laminate Area vs. Thermal Resistance

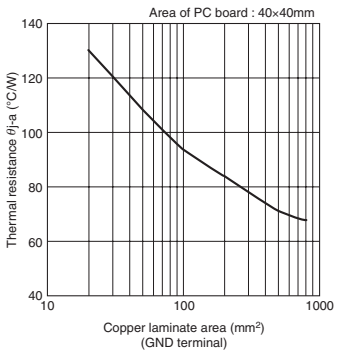

Copper Laminate Area vs. Power Dissipation

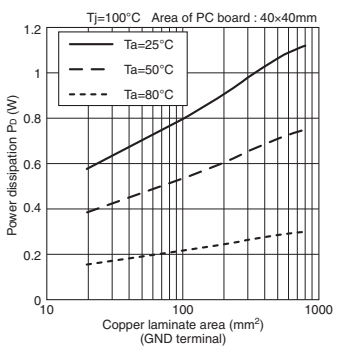

• Obtaining the junction temperature
Measure the temperature T_L at the lead part of the GND pin (pin 7) with a thermocouple, etc. Then, substitute this value in the following formula to obtain the junction temperature.

$T_j=P_D \times \theta_{j-L} + T_L$ ($\theta_{j-L} = 22°C/W$)