


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- $R_{DS(ON)}$, $V_{GS}@10V$, $I_{DS}@500mA=3\Omega$
- $R_{DS(ON)}$, $V_{GS}@4.5V$, $I_{DS}@200mA=4\Omega$
- Advanced Trench Process Technology
- High Density Cell Design For Ultra Low On-Resistance
- Very Low Leakage Current In Off Condition
- Specially Designed for Battery Operated Systems, Solid-State Relays Drivers : Relays, Displays, Lamps, Solenoids, Memories, etc.
- ESD Protected 2KV HBM
- In compliance with EU RoHS 2002/95/EC directives

SOT-23

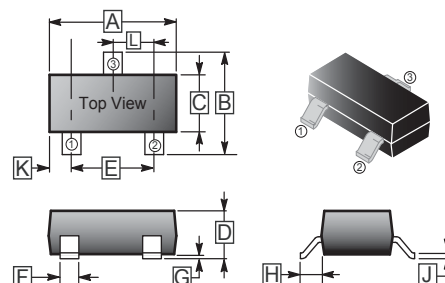

MECHANICAL DATA

- Case: SOT-23 Package
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.008 gram


REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.80	3.04	G	0.09	0.18
B	2.10	2.55	H	0.45	0.60
C	1.20	1.40	J	0.08	0.177
D	0.89	1.15	K	0.6	REF.
E	1.78	2.04	L	0.89	1.02
F	0.30	0.50			

MARKING

K72

PACKAGE INFORMATION

Package	MPQ	Leader Size
SOT-23	3K	7' inch



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)



Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	300	mA
Pulsed Drain Current ¹	I_{DM}	2000	mA
Maximum Power Dissipation	P_D	0.35	W
		0.21	
Thermal Resistance Junction-Ambient (PCB mounted) ²	$R_{\theta JA}$	357	$^\circ\text{C/W}$
Operating Junction and Storage Temperature	T_J, T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes:






- Maximum DC current limited by the package.
- Surface mounted on FR4 board, $t < 5\text{sec}$.

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	60	-	-	V	$V_{GS}=0, I_D=10\mu A$
Gate-Threshold Voltage	$V_{GS(th)}$	1	-	2.5	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Drain-Source On-Resistance	$r_{DS(ON)}$	-	-	4	Ω	$V_{GS}=4.5V, I_D=200mA$
		-	-	3		$V_{GS}=10V, I_D=500mA$
Zero Gate Voltage Drain Current	I_{DSS}	-	-	1	μA	$V_{DS}=60V, V_{GS}=0$
Gate-Body Leakage Current	I_{GSS}	-	-	± 10	μA	$V_{DS}=0, V_{GS}=\pm 20V$
Forward Transconductance	g_{fs}	100	-	-	mS	$V_{DS}=15V, I_D=250\text{ mA}$
Dynamic						
Total Gate Charge	Q_g	-	-	0.8	nC	$V_{DS}=15V, V_{GS}=5V, I_D=200mA$
Turn-On Time	$t_{(on)}$	-	-	20	nS	$V_{DD}=30V, R_L=150\Omega, I_D=200mA, V_{GEN}=10V, R_G=10\Omega$
Turn-Off Time	$t_{(off)}$	-	-	40		
Input Capacitance	C_{iss}	-	-	35	pF	$V_{DS}=25V, V_{GS}=0, f=1MHz$
Output Capacitance	C_{oss}	-	-	10		
Reverse Transfer Capacitance	C_{rss}	-	-	5		
Source-Drain Diode						
Diode Forward Voltage	V_{SD}	-	0.82	1.3	V	$I_S=200mA, V_{GS}=0$
Continuous Diode Forward Current	I_S	-	-	300	mA	
Pulse Diode Forward Current	I_{SM}	-	-	2000	mA	

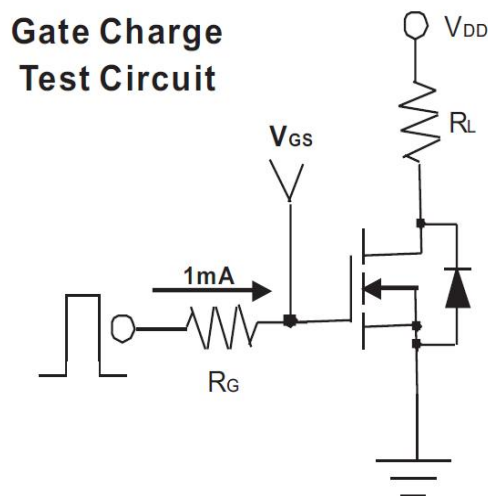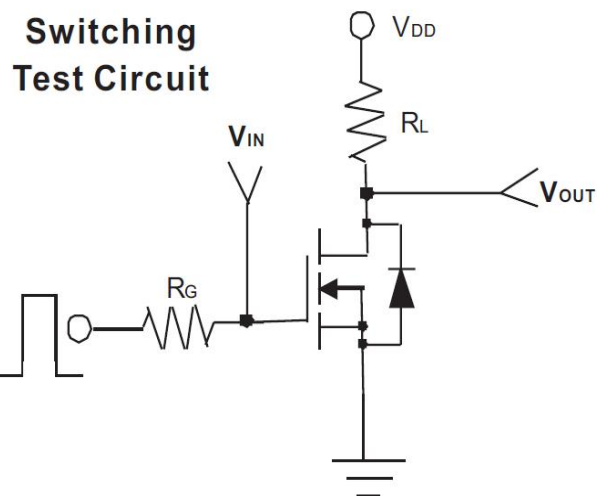

CHARACTERISTIC CURVE

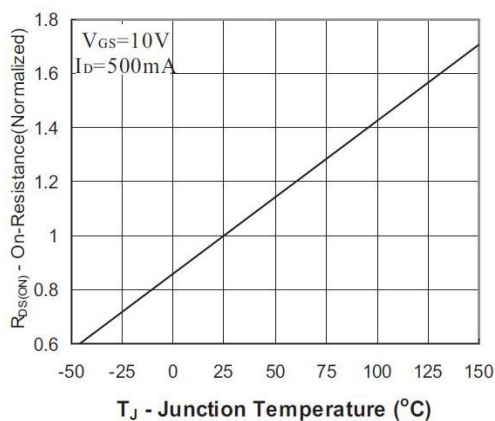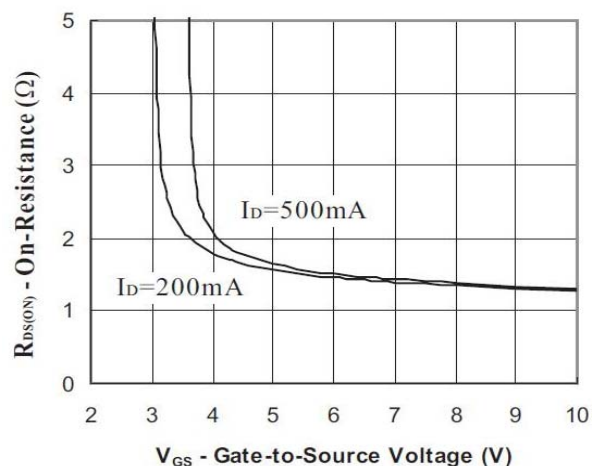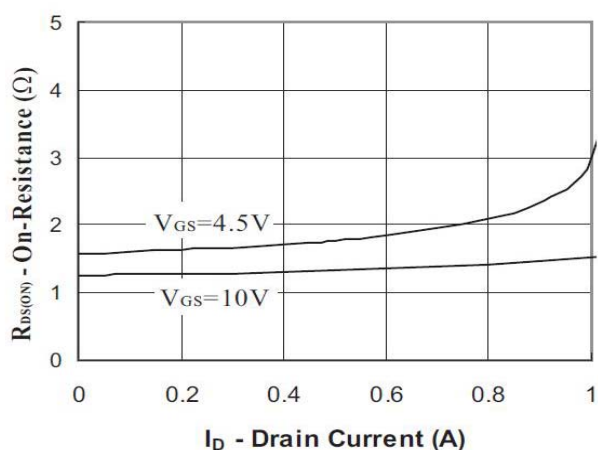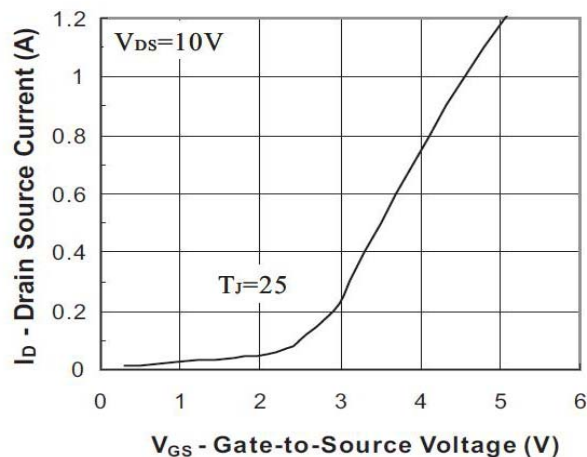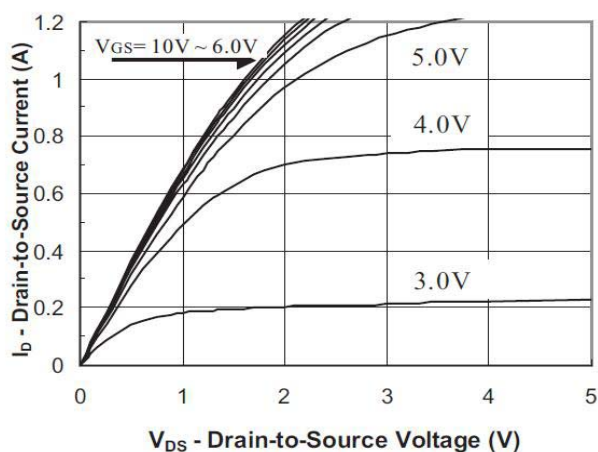

CHARACTERISTIC CURVE

