

6

5

4

3

2


1

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/07/11	


APPROVED: _____

DATE: _____ TITLE: _____

D


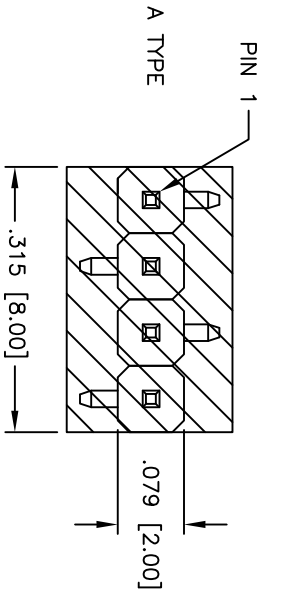


C

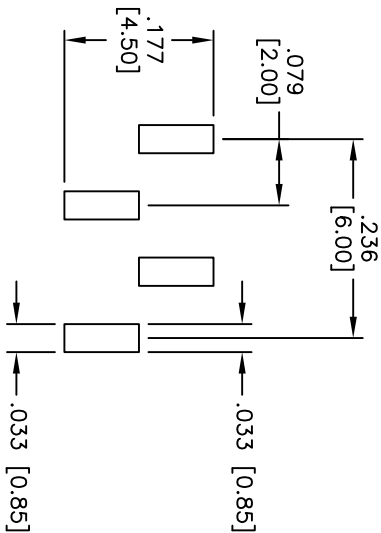

RECOMMENDED PCB LAYOUT

B

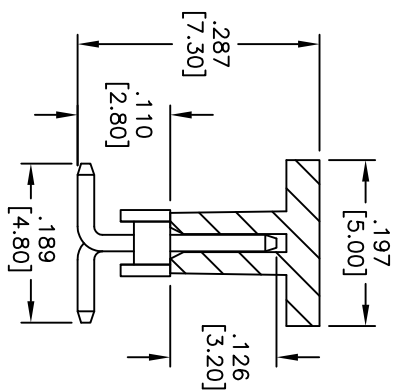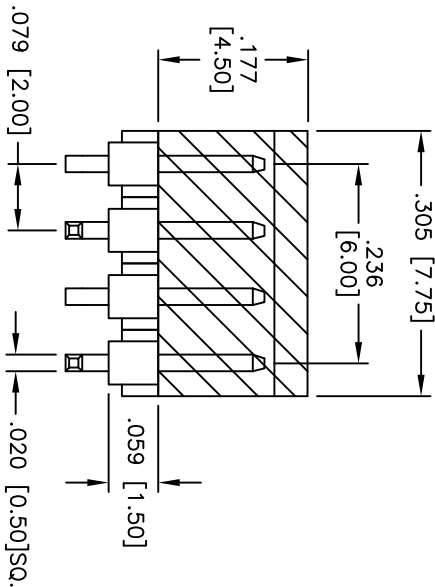

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds

PACKAGED ON TAPE & REEL

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 [2.00] SINGLE ROW PIN HEADER

SURFACE MOUNT, TYPE A

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		Holes		DATE		TITLE	
.X	± .10	ØX	± .10	.XXX	± .015	ØXXX	± .010	7/07/11	SIZE
.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010	DATE	PART NO.
.XXX	± .015	ØXXX	± .010	APPROVALS					REV.
DRAWN	DR								
CHECKED									
APPROVED									

6

5

4

3

2

1