

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/22/10	

APPROVED: _____

DATE: _____ TITLE: _____

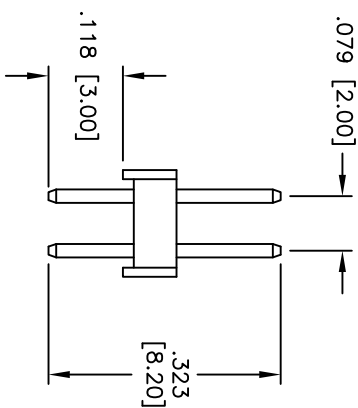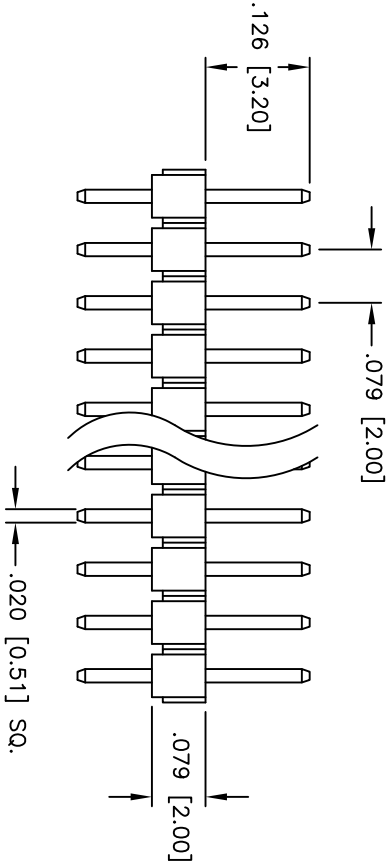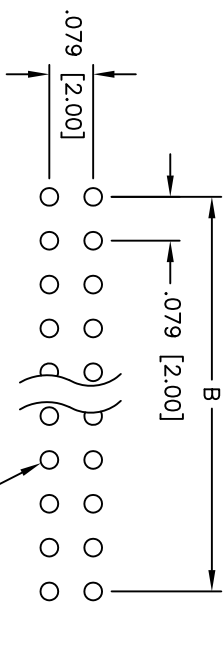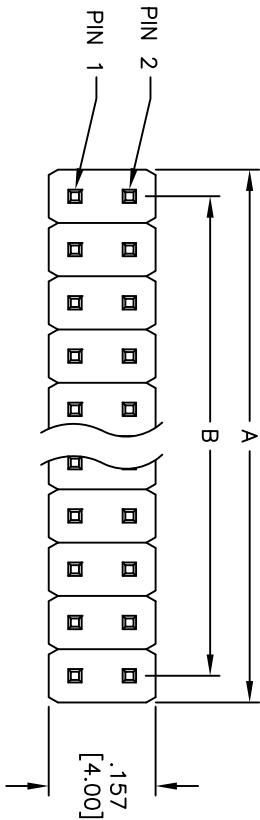

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



Positions: 2 thru 80
A = .079 [2.00] x No. of Positions per Row
B = .079 [2.00] x No. of Spaces

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 [2.00] DUAL ROW PIN HEADER

TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØXX	± .10	.XX	± .020	ØXXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	AY		7/22/10								
CHECKED	AH		7/22/10								
APPROVED											
SIZE				PART NO.				REV.			
X				2PH2-XX-T-118/.323				-			
REF: S00039T				SCALE: NTS				SHEET 1 OF 1			