


2-Electrode Gas Discharge Tubes

1: Dimension(mm)

5KA
Axial Lead Wire

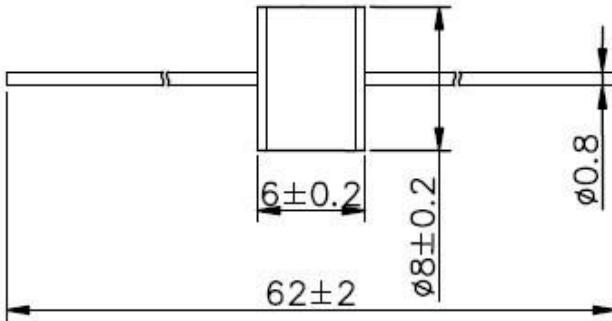

2:Main Applications

- PCI Cards protection
- Telephone/Fax/Modem protection
- single line protection
- ADSL/XDSL Splitter,Power Supply
- Surge Protection Device/Surge Protector

3:Features

- 100% Lead-Free(RoHS Compliant)
- Non-Radioactive
- Low capacitance: ≤1.5pF
- Small size :Φ8x6(mm)
- Safety certification: File number: E505240

4 Electrical Characteristics

Part Number	DC Spark-over Voltage	Impulse Spark-over Voltage	Impulse Spark-over Voltage	Insulation Resistance	Impulse discharge current	Impulse Life	AC discharge current	Delivery time	UL Certificate
	@100V/S	@100V/μs	@1KV/μs	GΩ	@8/20μs 10 Times	300 hits 10x1000μs	50Hz,1s 10times	days	UL497B
2R-75	75V ±20%	≤500V	≤ 600V	>10GΩ	5KA	100A	5A	12days	E505240
2R-90	90V ±20%	≤500V	≤ 600V	>10GΩ	5KA	100A	5A	12days	E505240
2R-140	140V ±20%	≤500V	≤ 600V	>10GΩ	5KA	100A	5A	12days	E505240
2R-150	150V ±20%	≤500V	≤ 600V	>10GΩ	5KA	100A	5A	12days	E505240
2R-200	200V ±20%	≤600V	≤ 700V	>10GΩ	5KA	100A	5A	12days	E505240
2R-230	230V ±20%	≤600V	≤ 700V	>10GΩ	5KA	100A	5A	12days	E505240
2R-250	250V ±20%	≤600V	≤ 700V	>10GΩ	5KA	100A	5A	12days	E505240
2R-260	260V ±20%	≤700V	≤ 800V	>10GΩ	5KA	100A	5A	12days	E505240
2R-300	300V ±20%	≤800V	≤ 900V	>10GΩ	5KA	100A	5A	12days	E505240
2R-350	350V ±20%	≤900V	≤ 1000V	>10GΩ	5KA	100A	5A	12days	E505240
2R-400	400V ±20%	≤900V	≤ 1000V	>10GΩ	5KA	100A	5A	12days	E505240
2R-420	420V ±20%	≤900V	≤ 1000V	>10GΩ	5KA	100A	5A	12days	E505240
2R-470	470V ±20%	≤1100V	≤ 1200V	>10GΩ	5KA	100A	5A	12days	E505240
2R-500	500V ±20%	≤1100V	≤ 1200V	>10GΩ	5KA	100A	5A	12days	E505240
2R-550	550V ±20%	≤1300V	≤ 1400V	>10GΩ	5KA	100A	5A	12days	E505240
2R-600	600V ±20%	≤1300V	≤1400V	>10GΩ	5KA	100A	5A	12days	E505240

4 Electrical Characteristics

Continue

Part Number	DC Holdover Voltage	On-State Voltage	Impulse discharge current 8/20μs	Peak Current @10/350 μs	Arc voltage at 1 A	Glow to arc transition current	Glow voltage	Weight
	Per ITU K.12 (<150ms)	Nominal @ 1A	1time	1time	V	A	V	g
2R-75	<52V	20V	10KA	1KA	~ 10V	< 0.8A	~ 55V	~1.5g
2R-90	<52V	20V	10KA	1KA	~ 12V	< 0.8A	~ 55V	~1.5g
2R-140	<80V	20V	10KA	1KA	~ 12V	< 0.5A	~ 60V	~1.5g
2R-150	<80V	20V	10KA	1KA	~ 12V	< 0.5A	~ 60V	~1.5g
2R-200	<135V	20V	10KA	1KA	~ 12V	< 0.5A	~ 60V	~1.5g
2R-230	<135V	20V	10KA	1KA	~ 12V	< 0.5A	~ 60V	~1.5g
2R-250	<135V	20V	10KA	1KA	~ 12V	< 0.5A	~ 60V	~1.5g
2R-260	<135V	20V	10KA	1KA	~ 12V	< 0.5A	~ 60V	~1.5g
2R-300	<150V	20V	10KA	1KA	~ 12V	< 0.2A	~ 60V	~1.5g
2R-350	<150V	20V	10KA	1KA	~ 12V	< 0.2A	~ 60V	~1.5g
2R-400	<150V	20V	10KA	1KA	~ 12V	< 0.2A	~ 60V	~1.5g
2R-420	<150V	20V	10KA	1KA	~ 12V	< 0.2A	~ 60V	~1.5g
2R-470	<150V	20V	10KA	1KA	~ 12V	< 0.2A	~ 60V	~1.5g
2R-500	<150V	20V	10KA	1KA	~ 12V	< 0.2A	~ 60V	~1.5g
2R-550	<150V	20V	10KA	1KA	~ 12V	< 0.2A	~ 60V	~1.5g
2R-600	<150V	20V	10KA	1KA	~ 12V	< 0.2A	~ 60V	~1.5g

1:At delivery AQL 0.65 leave II Military Standard 105 E

2:In ionized mode

3:Test according to ITU-T Rec.k.12


Environmental resistance

Storage temperature:	-40℃---+90℃
Operating temperature:	-40℃---+90℃
Electrode:	Tin Plated

Example Part Number: HA2R8-90L

HA	=	HUAAN
2	=	2 Electrode device
R	=	Gas Discharge Tube
8	=	8mm Diameter
90	=	90V
L	=	Low Surge 5KA

Packaging Information

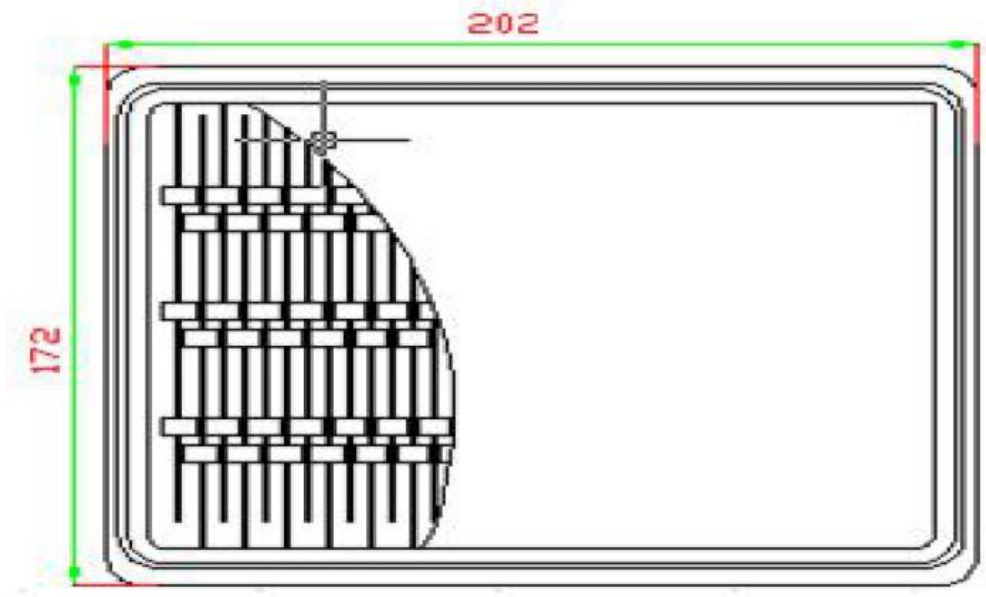

Packaging Quantity

Part Number	Quantity	
	Per Tray	Per Carton
2R-xxx Series	100PCS	5000PCS