
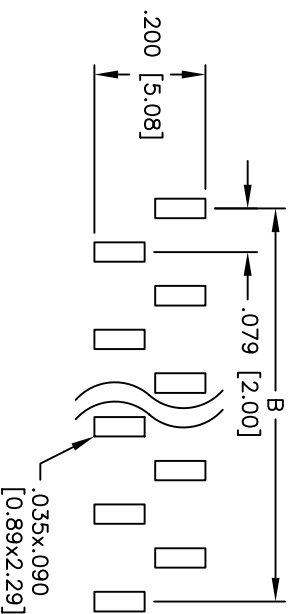




Rev	AWO #	Description	Date	Appr
-		RELEASED	5/27/05	

APPROVED: _____

DATE: _____ TITLE: _____

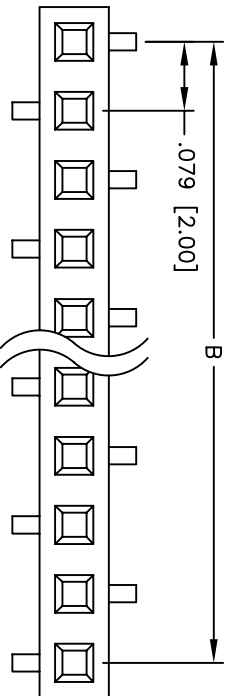

RECOMMENDED
PCB LAYOUT

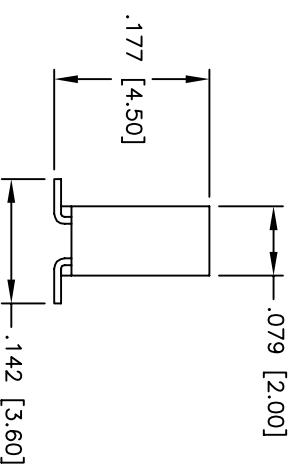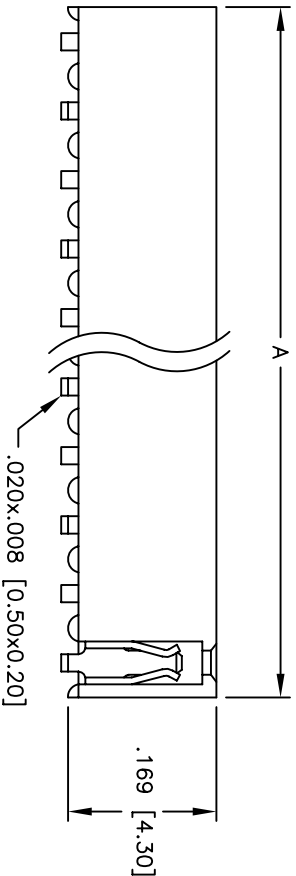

SPECIFICATIONS:

Material:

Insulator: Nylon 46, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max.

Current rating: 1 Amp max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds

Positions: 01 thru 40
A = .079 [2.00] x No. of Positions
B = .079 [2.00] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 [2.00] SINGLE ROW RECEPTACLE STRIP
.169 [4.30] HEIGHT, SMT, TYPE A

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				HOLES			
.X	± .10	ØXX	± .10	.XX	± .020	ØXXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	SS	5/27/05									
CHECKED											
APPROVED											

SIZE
X

PART NO.
2RS1-XX-G-SMT-A

REV.
-

SCALE
N/A

SHEET 1 OF 1