
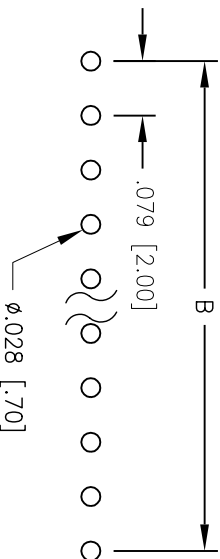
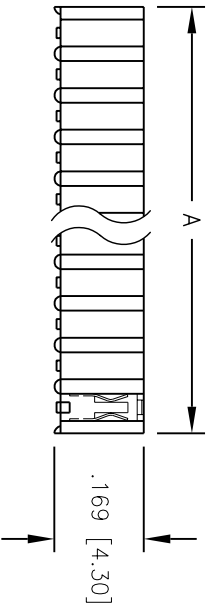
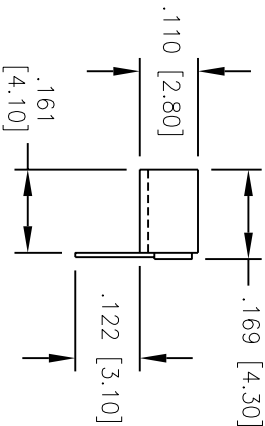


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/6/04	

APPROVED: _____
DATE: _____ TITLE: _____

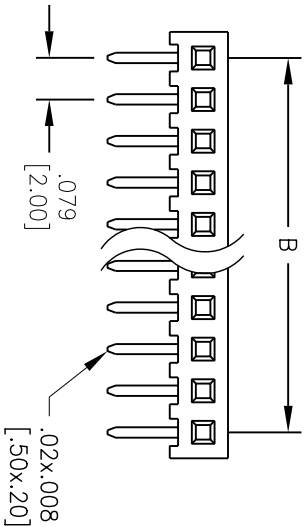

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold Flash over Nickel underplate on mating area, Tin over

Copper underplate on solder tails

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

A = .079 [2.00] X No. of Positions Per Row
B = .079 [2.00] x No of Spoces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
Holes .X ± .10 .XX ± .020 .XXX ± .015		TITLE .079 [2.0MM] RECEPTACLE STRIP, SINGLE ROW, RIGHT ANGLE	
Holes Ø.X ± .10 Ø.XX ± .015 Ø.XXX ± .010		SIZE PART NO. 2RS1R-XX-SG	
APPROVALS		SCALE: NTS	
DRAWN SS		DATE 12/6/04	
CHECKED		REV. -	
APPROVED		SHEET 1 OF 1	