DATASHEET

SQ-ASx SERIES

ON/OFF SHOCK AND ACCELERATION SENSOR



FUNCTION

- On / off shock & acceleration sensing

APPLICATIONS

- Damage detection for medical products
- Munitions
- Security, anti-tamper, anti-theft, alarms

DESCRIPTION

The SQ-ASx series sensors act like acceleration sensitive switches that open or close when accelerated past an acceleration threshold.

The sensor can be used to produces CMOS or TTL pulses to interrupt (wake up) a microcontroller. The sensor is fully passive, requires no signal conditioning, and operates with zero current or only 50 nA depending on model.







PATENTS

Patented. United States: 8367952, China: 101960316. Patents pending.

FEATURES

- **Miniature Size** - 3.3 mm x 6.9 mm
- **Simple Interface** - No signal conditioning required
- **Made in USA** - fully automated production, 100% testing
- **Fast Response** - < 100 uS
- **Multiple Sensitivities** - 10 G to 1400 G standard
- **Zero-power** - or nanopower
- **Industrial Rated** - 10 year life, -40º to 85º C

FUNCTIONAL DIAGRAMS

INPUT	OUTPUT
SQ-ASA series Axially sensitive, singled ended, normally closed	
	
SQ-ASB series Omnidirectional, normally closed	
	
SQ-ASC series Axially sensitive, single ended, normally open	
	
SQ-ASD series Omnidirectional, normally open	
	
SQ-ASE series Radially sensitive, normally open	
	

* See Functional Behavior for more details

© SignalQuest, LLC. 2014

10 Water St.
Lebanon, NH 03766 USA
Tel: 603.448.6266
Fax 603.218.6426
www.signalquest.com
info@signalquest.com

TABLE OF CONTENTS

Table of Contents 2
Characteristics 3
Dimensions For ASA, ASC, & ASE 3
Dimensions ASB & ASD 4
Example PCB Landing 5
Theory of Operation 6
Functional Behavior 6
Part Comparison 7
Product Comparison 7
Ordering Guide 7
Limitations and Warnings 8
Testing 8
System Integration Testing 8
Notice 8
Further Information 8
Notes 8

© SignalQuest, LLC. 2014
10 Water St.
Lebanon, NH 03766 USA
Tel: 603.448.6266
Fax 603.218.6426
www.signalquest.com
info@signalquest.com


CHARACTERISTICS

PARAMETER	MIN	MAX	CONDITIONS
Shock Survival		5,000 *g*	5x, 0.1 ms half-sin, any axis
Storage Temperature	-40º C	85º C	
Supply Voltage Range	0.5 V	12 V	
Current Sink*	50 nA	10 mA	

* Current consumption is determined by the resistance of the application circuit and the supply voltage.

DIMENSIONS FOR ASA & ASC

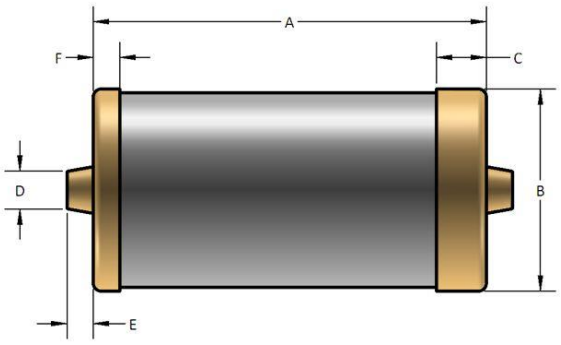PHYSICAL SIZE







SYMBOL	DESCRIPTION	MM	TOLERANCE
A	Length	6.8	±0.25
B	Diameter	3.3	±0.1
C	Terminal Width	0.8	±0.25
D	Solder Nub Diameter	0.9	±0.25
E	Solder Nub Length	0.4	±0.1
F	Terminal Width 2	.4	±0.25

© SignalQuest, LLC. 2014
10 Water St.
Lebanon, NH 03766 USA
Tel: 603.448.6266
Fax 603.218.6426
www.signalquest.com
info@signalquest.com

DIMENSIONS ASB, ASD, & ASE

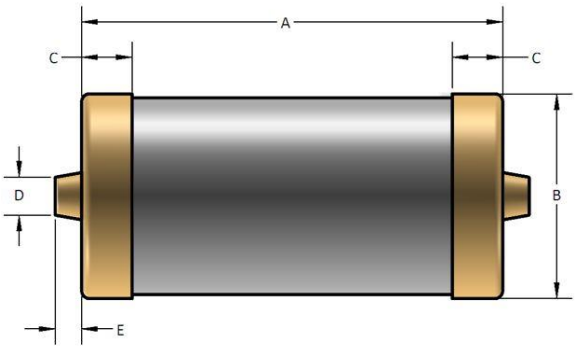PHYSICAL SIZE






SYMBOL	DESCRIPTION	MM	TOLERANCE
A	Length	6.8	±0.25
B	Diameter	3.3	±0.1
C	Terminal Width	0.8	±0.25
D	Solder Nub Diameter	0.9	±0.25
E	Solder Nub Length	0.4	±0.1

© SignalQuest, LLC. 2014
10 Water St.
Lebanon, NH 03766 USA
Tel: 603.448.6266
Fax 603.218.6426
www.signalquest.com
info@signalquest.com

EXAMPLE PCB LANDING


RECOMMENDED PCB LANDING

SYMBOL	DESCRIPTION	MM
A	Pitch	6.0
B	Pad Length	1.2
C	Pad Width	2.1

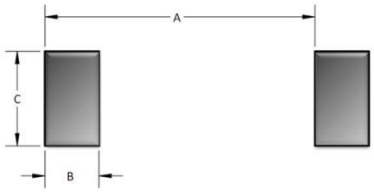

ALTERNATE, PCB CUTOUT LANDING (USE FOR LOWEST PROFILE)

SYMBOL	DESCRIPTION	MM
A	Recess Length	7.25
B	Pad Length	0.8
C	Pad Width	1.5
D	Recess Width	3.6

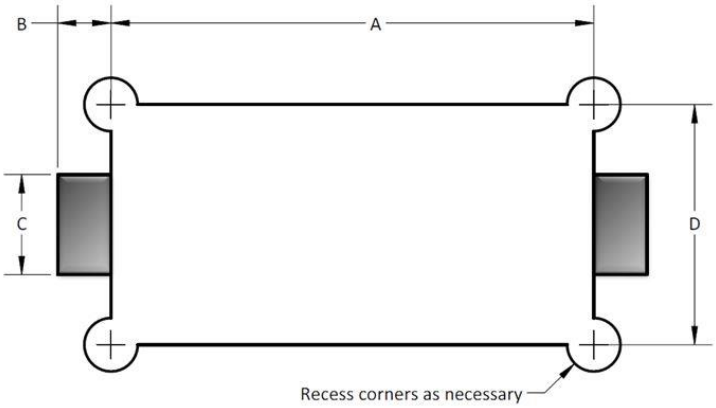

***Note:** Alternative layouts may be used to optimize size or manufacturability

© SignalQuest, LLC. 2014
10 Water St.
Lebanon, NH 03766 USA
Tel: 603.448.6266
Fax 603.218.6426
www.signalquest.com
info@signalquest.com

THEORY OF OPERATION

Acceleration causes a spring and/or weight to either open or close a circuit depending on model.

FUNCTIONAL BEHAVIOR

SQ-ASA

The SQ-ASA series sensor is a normally **closed** device. It is designed to be sensitive only in one direction. However, it will exhibit some off axis sensitivity. Typical cross axis open signals are in the 2 – 8 mS range, where on axis open signals are proportional to the duration of acceleration above the threshold.

SQ-ASB

The SQ-ASB series sensor is a normally **closed** device. It is designed to be sensitive in all directions. It is about 4 times more sensitive off axis than on axis. Typical cross axis open signals are in the 2 – 8 mS range, where on axis open signals are proportional to the duration of acceleration above the threshold. **NOTE**: If better accuracy is required, choose the cross axis specification that matches your requirements and use two sensors at 90 degrees to one another, logically "OR'ed" together.

SQ-ASC

The SQ-ASC series sensor is a normally **open** device. It is designed to be sensitive only in one direction and is very immune to cross axis acceleration. Only if a cross axis event is 10 times greater than the rated threshold may the sensor trigger in a cross axis mode.

SQ-ASD

The SQ-ASD series sensor is a normally **open** device. It is designed to be sensitive in all directions. The sensor will trigger radially or in the terminal 1→2 direction when acceleration is applied. In the terminal 2→1 direction, the sensor will trigger after the acceleration is removed (rebound effect). **NOTE**: If using the rebound trigger in the 2→1 direction is not appropriate for the application, mount two sensor parallel in opposite directions.

SQ-ASE

The SQ-ASE series sensor is a normally **open** device. It is designed to be sensitive in a radial direction. The sensor will trigger radially when acceleration is applied. **NOTE**: To achieve an omnidirectional response mount two sensors at 90 degrees to one another in any plane, logically "OR'ed" together.

© SignalQuest, LLC. 2014
10 Water St.
Lebanon, NH 03766 USA
Tel: 603.448.6266
Fax 603.218.6426
www.signalquest.com
info@signalquest.com

PART COMPARISON

PART NUMBER	TYPE	SENSITIVITY	ACCELERATION THRESHOLD (ON AXIS)
SQ-ASA-150	Normally closed	One axis, single sided	150 G
SQ-ASB-010	Normally closed	Omnidirectional	5 - 20 G
SQ-ASE-060	Normally open	Radial axis	60 G
SQ-ASE-100	Normally open	Radial axis	100 G
SQ-ASE-1400	Normally open	Radial axis	1400 G

PRODUCT COMPARISON

GRADE	ASSEMBLY METHOD	SEALED	WASHABLE	ROHS	OPERATING TEMPERATURE	CYCLES *	SERVICE LIFE (YRS)
I	Reflow Solder: 260° C peak Hand Assembly: 315° C peak, 2 -3 seconds on end terminal	Yes	Yes	Yes	-40° to +85° C	100,000	10
C	Reflow Solder: 260° C peak Hand Assembly: 315° C peak, 2 -3 seconds on end terminal	Yes	Yes	Yes	-25° to +70° C	100,000	5

*Test conditions: 0.5 *g*RMS, 5 to 200 Hz flat spectrum

ORDERING GUIDE

PART NUMBER	PACKAGING CODE	EXAMPLE COMPLETE ORDER NUMBER
SQ-ASx-xxx-C	TR - Tape on Reel	SQ-ASA-150-CTR
SQ-ASx-xxx-I	CT - Cut Tape TR - Tape on Reel	SQ-ASB-010-ICT SQ-ASE-060-ITR

© SignalQuest, LLC. 2014
10 Water St.
Lebanon, NH 03766 USA
Tel: 603.448.6266
Fax 603.218.6426
www.signalquest.com
info@signalquest.com

LIMITATIONS AND WARNINGS

This product is not designed for use in life support and/or safety equipment where malfunction of the product can reasonably be expected to result in personal injury or death. Buyer uses this product in such applications at Buyer's own risk and agrees to defend, indemnify, and hold harmless SignalQuest, LLC. from any and all damages, claims, suits, or expenses resulting from such misuse.

TESTING

The performance of each sensor is verified through build-time testing.

SYSTEM INTEGRATION TESTING

Thorough testing should be carried out prior to product release to ensure system integration has not introduced unforeseen problems. The system integrator assumes the ultimate responsibility for the safety of the target application.

NOTICE

Information furnished by SignalQuest, LLC is believed to be accurate and reliable. However, this document may contain ERRORS and OMMISIONS. Accordingly, the design engineer should use this document as a reference rather than a strict design guideline and should perform thorough testing of any product that incorporates this or any other SignalQuest product. No responsibility is assumed by SignalQuest, LLC. for this use of this information, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of SignalQuest, LLC. Trademarks and registered trademarks are the property of their respective companies.

FURTHER INFORMATION

For pricing, deliveries, and ordering information, please contact SignalQuest at (603) 448-6266
For updates on this and other documents, visit our website at www.signalquest.com.

NOTES

© SignalQuest, LLC. 2014
10 Water St.
Lebanon, NH 03766 USA
Tel: 603.448.6266
Fax 603.218.6426
www.signalquest.com
info@signalquest.com