2SA1343, 2SC3397

T-37-13
T-35-11

2018A

PNP/NPN Epitaxial Planar Silicon Transistors

Switching Applications
(with Bias Resistances R1=46kΩ, R2=23kΩ)

E1285C

Applications

- Switching circuit, inverter circuit, interface circuit, driver circuit.

Features

- Built-in bias resistor (R_1=46kΩ, R_2=23kΩ).
- Small-sized package (CP).

( ): 2SA1343

Absolute Maximum Ratings/T_a=25°C

			unit
Collector to Base Voltage	V_{CBO}	(–)50	V
Collector to Emitter Voltage	V_{CEO}	(–)50	V
Emitter to Base Voltage	V_{EBO}	(–)10	V
Collector Current	I_C	(–)100	mA
Peak Collector Current	i_{cp}	(–)200	mA
Collector Dissipation	P_C	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	–55 to +150	°C

Electrical Characteristics/T_a=25°C

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	V_{CB}=(–)40V, I_E=0			(–)0.1	μA
Collector Cutoff Current	I_{CEO}	V_{CE}=(–)40V, I_B=0			(–)0.5	μA
Emitter Cutoff Current	I_{EBO}	V_{EB}=(–)5V, I_C=0	(–)40	(–)72	(–)100	μA
DC Current Gain	h_{FE}	V_{CE}=(–)5V, I_C=(–)5mA	50			
Gain Band-width product	f_T	V_{CE}=(–)10V, I_C=(–)5mA		250 (200)		MHz
Output Capacitance	c_{ob}	V_{CB}=(–)10V, f=1MHz		3.5 (5.3)		pF
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=(–)5mA, I_B=(–)0.25mA		(–)0.1	(–)0.3	V

Continued on next page.

Marking

2SA1343: DL, 2SC3397: DY

Electrical Connection

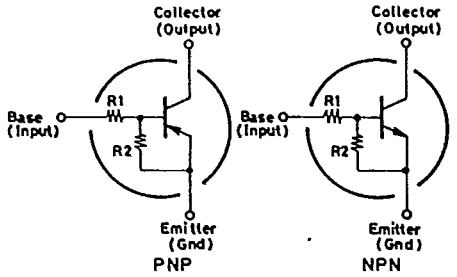

Case Outline 2018A
(unit : mm)

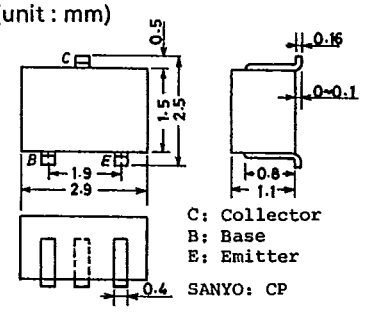

This Material Copyrighted By Its Respective Manufacturer

Continued from preceding page.

			min	typ	max	unit
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	I_C=(−)10μA, I_E=0	(−)50			V
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C=(−)100μA, R_{BE}=∞	(−)50			V
Input Off Voltage	$V_{I(off)}$	V_{CE}=(−)5V, I_C=(−)100μA	(−)1.2	(−)1.6	(−)2.3	V
Input On Voltage	$V_{I(on)}$	V_{CE}=(−)0.2V, I_C=(−)5mA	(−)1.5	(−)3.1	(−)6.0	V
Input Resistance	R_1		32	46	60	kΩ
Input Resistance Ratio	R_1/R_2		1.8	2.0	2.2	—

■ **Sample Application Circuit**

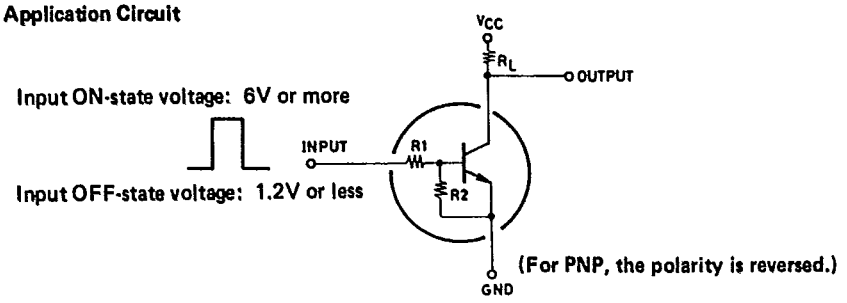

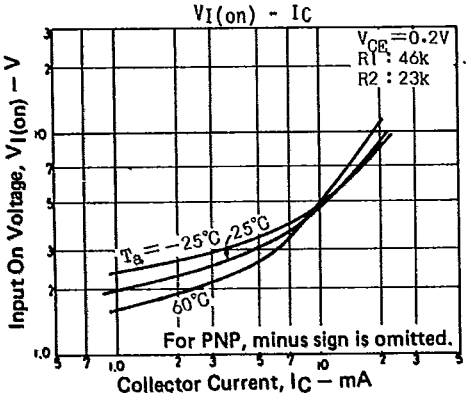

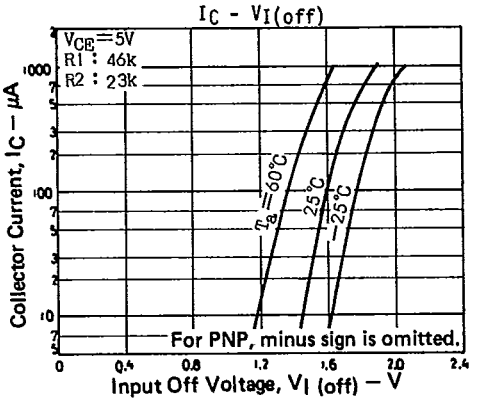

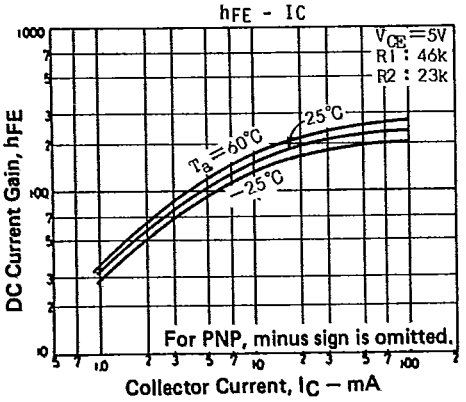

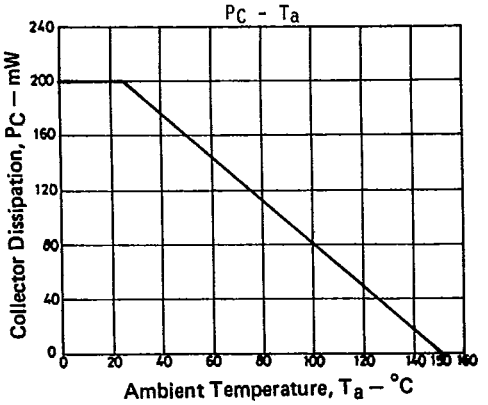

This Material Copyrighted By Its Respective Manufacturer

T-91-20

CASE OUTLINES OF SURFACE MOUNT TRANSISTORS

- All of Sanyo surface mount transistor case outlines are illustrated below.
- All dimensions are in mm, and dimensions which are not followed by min. or max. are represented by typical values.
- No marking is indicated.

Case Outline—[2018A] unit: mm

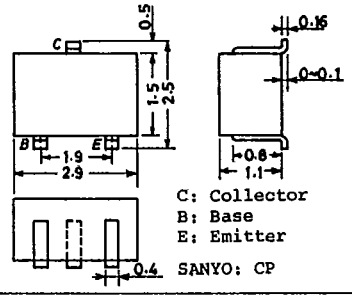

Case Outline—[2038] unit: mm



Case Outline—[2024A] unit: mm

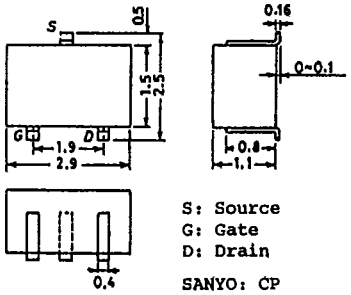

Case Outline—[2044] unit: mm



Case Outline—[2028A] unit: mm



Case Outline—[2046] unit: mm



Case Outline—[2030A] unit: mm



Case Outline—[2050] unit: mm

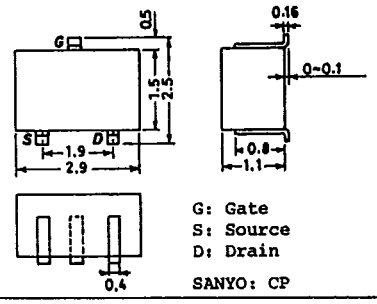

This Material Copyrighted By Its Respective Manufacturer

Case Outline—[2057] unit: mm



S: Source
G: Gate
D: Drain
SANYO: MCP

Case Outline—[2058] unit: mm



G: Gate
S: Source
D: Drain
SANYO: MCP

Case Outline—[2059] unit: mm



B: Base
C: Collector
E: Emitter
SANYO: MCP

Case Outline—[2062] unit: mm



S: Source
D: Drain
G: Gate
SANYO: PCP

Case Outline—[2065] unit: mm

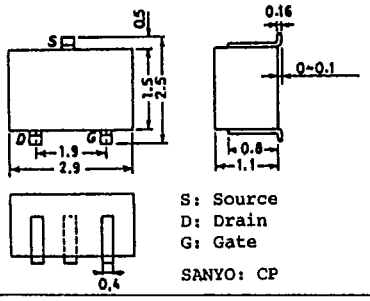

S: Source
D: Drain
G: Gate
SANYO: CP

Case Outline—[2066] unit: mm



C1 : Collector 1
C2 : Collector 2
B2 : Base 2
EC : Emitter Common
B1 : Base 1
SANYO : CP6

Case Outline—[2067] unit: mm



E1 : Emitter 1
B1 : Base 1
C2 : Collector 2
E2 : Emitter 2
B2 : Base 2
C1 : Collector 1
SANYO : CP6

Case Outline—[2068] unit: mm



E1 : Emitter 1
E2 : Emitter 2
B2 : Base 2
C2 : Collector 2
B1 : Base 1
C1 : Collector 1
SANYO : CP6

Case Outline—[2069] unit: mm



B: Base
C: Collector
E: Emitter
SANYO: SMP

Case Outline—[2070] unit: mm



G1: Gate 1
G2: Gate 2
D2: Drain 2
SC: Source Common
D1: Drain 1
SANYO : CP6

This Material Copyrighted By Its Respective Manufacturer

T-91-20

Case Outline—[2071] unit: mm



Case Outline—[2072] unit: mm



Case Outline—[2073] unit: mm



This Material Copyrighted By Its Respective Manufacturer