

## 1.5A Dual High-Speed Power MOSFET Drivers

### Features:

- High-Speed Switching ( $C_L = 1000$  pF): 30 nsec
- High Peak Output Current: 1.5A
- High Output Voltage Swing:
  - $V_{DD} - 25$  mV
  - GND +25 mV
- Low Input Current (Logic '0' or '1'): 1  $\mu$ A
- TTL/CMOS Input Compatible
- Available in Inverting and Noninverting Configurations
- Wide Operating Supply Voltage:
  - 4.5V to 18V
- Current Consumption:
  - Inputs Low – 0.4 mA
  - Inputs High – 8 mA
- Single Supply Operation
- Low Output Impedance: 6 $\Omega$
- Pinout Equivalent of DS0026 and MMH0026
- Latch-Up Resistant: Withstands > 500 mA Reverse Current
- ESD Protected: 2 kV


### Applications:

- Switch Mode Power Supplies
- Pulse Transformer Drive
- Clock Line Driver
- Coax Cable Driver

### Device Selection Table

| Part Number | Package      | Configuration | Temp. Range     |
|-------------|--------------|---------------|-----------------|
| TC426COA    | 8-Pin SOIC   | Inverting     | 0°C to +70°C    |
| TC426CPA    | 8-Pin PDIP   | Inverting     | 0°C to +70°C    |
| TC426EOA    | 8-Pin SOIC   | Inverting     | -40°C to +85°C  |
| TC426EPA    | 8-Pin PDIP   | Inverting     | -40°C to +85°C  |
| TC426IJA    | 8-Pin CERDIP | Inverting     | -25°C to +85°C  |
| TC426MJA    | 8-Pin CERDIP | Inverting     | -55°C to +125°C |
| TC427COA    | 8-Pin SOIC   | Noninverting  | 0°C to +70°C    |
| TC427CPA    | 8-Pin PDIP   | Noninverting  | 0°C to +70°C    |
| TC427EOA    | 8-Pin SOIC   | Noninverting  | -40°C to +85°C  |
| TC427EPA    | 8-Pin PDIP   | Noninverting  | -40°C to +85°C  |
| TC427IJA    | 8-Pin CERDIP | Noninverting  | -25°C to +85°C  |
| TC427MJA    | 8-Pin CERDIP | Noninverting  | -55°C to +125°C |
| TC428COA    | 8-Pin SOIC   | Complementary | 0°C to +70°C    |
| TC428CPA    | 8-Pin PDIP   | Complementary | 0°C to +70°C    |
| TC428EOA    | 8-Pin SOIC   | Complementary | -40°C to +85°C  |
| TC428EPA    | 8-Pin PDIP   | Complementary | -40°C to +85°C  |
| TC428IJA    | 8-Pin CERDIP | Complementary | -25°C to +85°C  |
| TC428MJA    | 8-Pin CERDIP | Complementary | -55°C to +125°C |

### Package Type

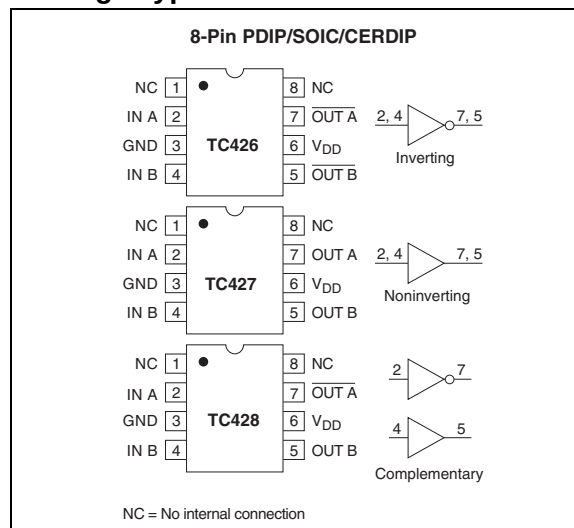

### General Description:

The TC426/TC427/TC428 are dual CMOS high-speed drivers. A TTL/CMOS input voltage level is translated into a rail-to-rail output voltage level swing. The CMOS output is within 25 mV of ground or positive supply.

The low-impedance, high-current driver outputs swing a 1000 pF load 18V in 30 nsec. The unique current and voltage drive qualities make the TC426/TC427/TC428 ideal power MOSFET drivers, line drivers, and DC-to-DC converter building blocks.

Input logic signals may equal the power supply voltage. Input current is a low 1  $\mu$ A, making direct interface to CMOS/bipolar switch-mode power supply control ICs possible, as well as open-collector analog comparators.


Quiescent power supply current is 8 mA maximum. The TC426 requires 1/5 the current of the pin-compatible bipolar DS0026 device. This is important in DC-to-DC converter applications with power efficiency constraints and high-frequency switch-mode power supply applications. Quiescent current is typically 6 mA when driving a 1000 pF load 18V at 100 kHz.

The inverting TC426 driver is pin-compatible with the bipolar DS0026 and MMH0026 devices. The TC427 is noninverting; the TC428 contains an inverting and non-inverting driver.

Other pin compatible driver families are the TC1426/TC1427/TC1428, TC4426/TC4427/TC4428 and TC4426A/TC4427A/TC4428A.

# TC426/TC427/TC428

## Functional Block Diagram

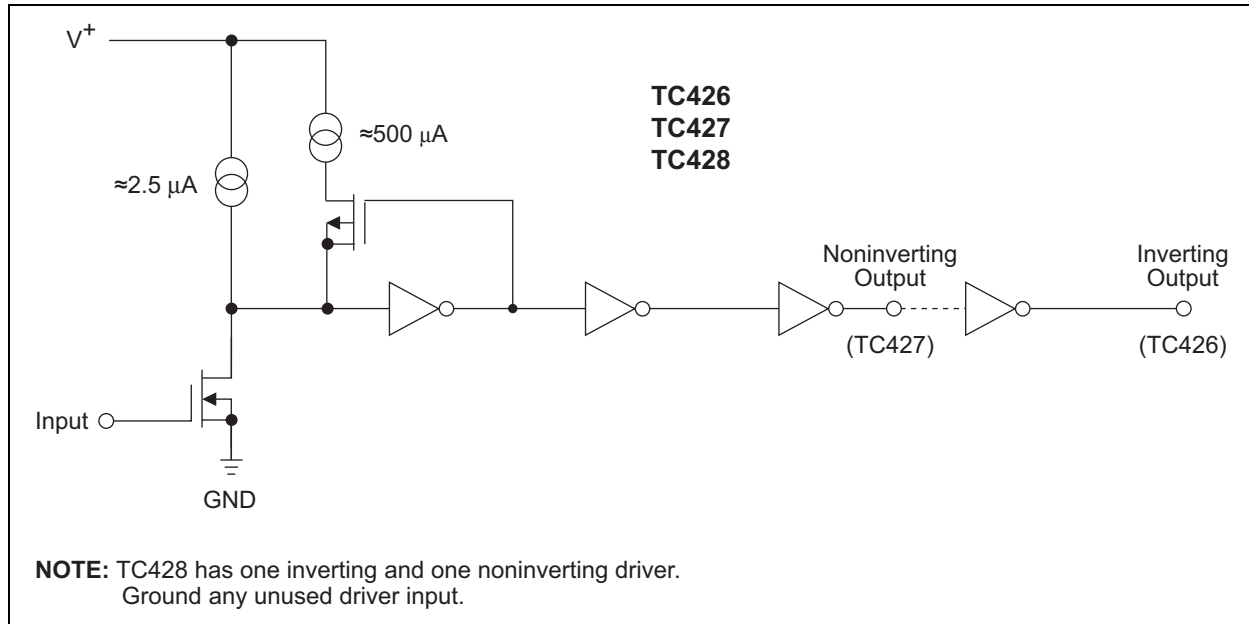

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings\*

|                                             |                                 |
|---------------------------------------------|---------------------------------|
| Supply Voltage .....                        | +20V                            |
| Input Voltage, Any Terminal<br>.....        | $V_{DD} + 0.3V$ to $GND - 0.3V$ |
| Power Dissipation ( $T_A \leq 70^\circ C$ ) |                                 |
| PDIP .....                                  | 730 mW                          |
| CERDIP .....                                | 800 mW                          |
| SOIC .....                                  | 470 mW                          |
| Derating Factor                             |                                 |
| PDIP .....                                  | 8 mW/ $^\circ C$                |
| CERDIP .....                                | 6.4 mW/ $^\circ C$              |
| SOIC .....                                  | 4 mW/ $^\circ C$                |
| Operating Temperature Range                 |                                 |
| C Version .....                             | $0^\circ C$ to $+70^\circ C$    |
| I Version .....                             | $-25^\circ C$ to $+85^\circ C$  |
| E Version .....                             | $-40^\circ C$ to $+85^\circ C$  |
| M Version .....                             | $-55^\circ C$ to $+125^\circ C$ |
| Storage Temperature Range .....             | $-65^\circ C$ to $+150^\circ C$ |

\*Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of the specifications is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

### TC426/TC427/TC428 ELECTRICAL SPECIFICATIONS

| Electrical Characteristics: $T_A = +25^\circ C$ with $4.5V \leq V_{DD} \leq 18V$ , unless otherwise noted. |                             |                  |     |          |          |                                                            |
|------------------------------------------------------------------------------------------------------------|-----------------------------|------------------|-----|----------|----------|------------------------------------------------------------|
| Symbol                                                                                                     | Parameter                   | Min              | Typ | Max      | Units    | Test Conditions                                            |
| <b>Input</b>                                                                                               |                             |                  |     |          |          |                                                            |
| $V_{IH}$                                                                                                   | Logic 1, High Input Voltage | 2.4              | —   | —        | V        |                                                            |
| $V_{IL}$                                                                                                   | Logic 0, Low Input Voltage  | —                | —   | 0.8      | V        |                                                            |
| $I_{IN}$                                                                                                   | Input Current               | -1               | —   | 1        | $\mu A$  | $0V \leq V_{IN} \leq V_{DD}$                               |
| <b>Output</b>                                                                                              |                             |                  |     |          |          |                                                            |
| $V_{OH}$                                                                                                   | High Output Voltage         | $V_{DD} - 0.025$ | —   | —        | V        |                                                            |
| $V_{OL}$                                                                                                   | Low Output Voltage          | —                | —   | 0.025    | V        |                                                            |
| $R_{OH}$                                                                                                   | High Output Resistance      | —                | 10  | 15       | $\Omega$ | $I_{OUT} = 10\text{ mA}$ , $V_{DD} = 18V$                  |
| $R_{OL}$                                                                                                   | Low Output Resistance       | —                | 6   | 10       | $\Omega$ | $I_{OUT} = 10\text{ mA}$ , $V_{DD} = 18V$                  |
| $I_{PK}$                                                                                                   | Peak Output Current         | —                | 1.5 | —        | A        |                                                            |
| <b>Switching Time (Note 1)</b>                                                                             |                             |                  |     |          |          |                                                            |
| $t_R$                                                                                                      | Rise Time                   | —                | —   | 30       | nsec     | Figure 3-1, Figure 3-2                                     |
| $t_F$                                                                                                      | Fall Time                   | —                | —   | 30       | nsec     | Figure 3-1, Figure 3-2                                     |
| $t_{D1}$                                                                                                   | Delay Time                  | —                | —   | 50       | nsec     | Figure 3-1, Figure 3-2                                     |
| $t_{D2}$                                                                                                   | Delay Time                  | —                | —   | 75       | nsec     | Figure 3-1, Figure 3-2                                     |
| <b>Power Supply</b>                                                                                        |                             |                  |     |          |          |                                                            |
| $I_S$                                                                                                      | Power Supply Current        | —                | —   | 8<br>0.4 | mA       | $V_{IN} = 3V$ (Both Inputs)<br>$V_{IN} = 0V$ (Both Inputs) |

**Note 1:** Switching times ensured by design.

# TC426/TC427/TC428

## TC426/TC427/TC428 ELECTRICAL SPECIFICATIONS (CONTINUED)

| Electrical Characteristics: Over operating temperature range with $4.5V \leq V_{DD} \leq 18V$ , unless otherwise noted. |                             |                  |    |       |          |                                         |
|-------------------------------------------------------------------------------------------------------------------------|-----------------------------|------------------|----|-------|----------|-----------------------------------------|
| Input                                                                                                                   |                             |                  |    |       |          |                                         |
| $V_{IH}$                                                                                                                | Logic 1, High Input Voltage | 2.4              | —  | —     | V        |                                         |
| $V_{IL}$                                                                                                                | Logic 0, Low Input Voltage  | —                | —  | 0.8   | V        |                                         |
| $I_{IN}$                                                                                                                | Input Current               | -10              | —  | 10    | $\mu A$  | $0V \leq V_{IN} \leq V_{DD}$            |
| Output                                                                                                                  |                             |                  |    |       |          |                                         |
| $V_{OH}$                                                                                                                | High Output Voltage         | $V_{DD} - 0.025$ | —  | —     | V        |                                         |
| $V_{OL}$                                                                                                                | Low Output Voltage          | —                | —  | 0.025 | V        |                                         |
| $R_{OH}$                                                                                                                | High Output Resistance      | —                | 13 | 20    | $\Omega$ | $I_{OUT} = 10 \text{ mA}, V_{DD} = 18V$ |
| $R_{OL}$                                                                                                                | Low Output Resistance       | —                | 8  | 15    | $\Omega$ | $I_{OUT} = 10 \text{ mA}, V_{DD} = 18V$ |
| Switching Time (Note 1)                                                                                                 |                             |                  |    |       |          |                                         |
| $t_R$                                                                                                                   | Rise Time                   | —                | —  | 60    | nsec     | Figure 3-1, Figure 3-2                  |
| $t_F$                                                                                                                   | Fall Time                   | —                | —  | 60    | nsec     | Figure 3-1, Figure 3-2                  |
| $t_{D1}$                                                                                                                | Delay Time                  | —                | —  | 75    | nsec     | Figure 3-1, Figure 3-2                  |
| $t_{D2}$                                                                                                                | Delay Time                  | —                | —  | 120   | nsec     | Figure 3-1, Figure 3-2                  |
| Power Supply                                                                                                            |                             |                  |    |       |          |                                         |
| $I_S$                                                                                                                   | Power Supply Current        | —                | —  | 12    | mA       | $V_{IN} = 3V$ (Both Inputs)             |
|                                                                                                                         |                             | —                | —  | 0.6   |          | $V_{IN} = 0V$ (Both Inputs)             |

**Note 1:** Switching times ensured by design.

## 2.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in Table 2-1.

**TABLE 2-1: PIN FUNCTION TABLE**

| Pin No.<br>(8-Pin PDIP,<br>SOIC, CERDIP) | Symbol          | Description                                       |
|------------------------------------------|-----------------|---------------------------------------------------|
| 1                                        | NC              | No Internal Connection.                           |
| 2                                        | IN A            | Control Input A, TTL/CMOS compatible logic input. |
| 3                                        | GND             | Ground.                                           |
| 4                                        | IN B            | Control Input B, TTL/CMOS compatible logic input. |
| 5                                        | OUT B           | CMOS totem-pole output.                           |
| 6                                        | V <sub>DD</sub> | Supply input, 4.5V to 18V.                        |
| 7                                        | OUT A           | CMOS totem-pole output.                           |
| 8                                        | NC              | No internal Connection.                           |

# TC426/TC427/TC428

## 3.0 APPLICATIONS INFORMATION

### 3.1 Supply Bypassing

Charging and discharging large capacitive loads quickly requires large currents. For example, charging a 1000 pF load to 18V in 25 nsec requires an 0.72A current from the device power supply.

To ensure low supply impedance over a wide frequency range, a parallel capacitor combination is recommended for supply bypassing. Low-inductance ceramic disk capacitors with short lead lengths (< 0.5 in.) should be used. A 1  $\mu$ F film capacitor in parallel with one or two 0.1  $\mu$ F ceramic disk capacitors normally provides adequate bypassing.

### 3.2 Grounding

The TC426 and TC428 contain inverting drivers. Ground potential drops developed in common ground impedances from input to output will appear as negative feedback and degrade switching speed characteristics.

Individual ground returns for the input and output circuits or a ground plane should be used.

### 3.3 Input Stage

The input voltage level changes the no-load or quiescent supply current. The N-channel MOSFET input stage transistor drives a 2.5 mA current source load. With a logic '1' input, the maximum quiescent supply current is 8 mA. Logic '0' input level signals reduce quiescent current to 0.4 mA maximum. Minimum power dissipation occurs for logic '0' inputs for the TC426/TC427/TC428. **Unused driver inputs must be connected to  $V_{DD}$  or GND.**

The drivers are designed with 100 mV of hysteresis. This provides clean transitions and minimizes output stage current spiking when changing states. Input voltage thresholds are approximately 1.5V, making the device TTL compatible over the 4.5V to 18V supply operating range. Input current is less than 1  $\mu$ A over this range.

The TC426/TC427/TC428 may be directly driven by the TL494, SG1526/1527, SG1524, SE5560, and similar switch-mode power supply integrated circuits.

## 3.4 Power Dissipation

The supply current vs frequency and supply current vs capacitive load characteristic curves will aid in determining power dissipation calculations.

The TC426/TC427/TC428 CMOS drivers have greatly reduced quiescent DC power consumption. Maximum quiescent current is 8 mA compared to the DS0026 40 mA specification. For a 15V supply, power dissipation is typically 40 mW.

Two other power dissipation components are:

- Output stage AC and DC load power.
- Transition state power.

Output stage power is:

$$P_o = P_{DC} + P_{AC} \\ = V_o (I_{DC}) + f C_L V_s^2$$

Where:

- $V_o$  = DC output voltage
- $I_{DC}$  = DC output load current
- $f$  = Switching frequency
- $V_s$  = Supply voltage


In power MOSFET drive applications the  $P_{DC}$  term is negligible. MOSFET power transistors are high-impedance, capacitive input devices. In applications where resistive loads or relays are driven, the  $P_{DC}$  component will normally dominate.

The magnitude of  $P_{AC}$  is readily estimated for several cases:


- | A.                  | B.                  |
|---------------------|---------------------|
| 1. $f = 200$ kHz    | 1. $f = 200$ kHz    |
| 2. $C_L = 1000$ pf  | 2. $C_L = 1000$ pf  |
| 3. $V_s = 18$ V     | 3. $V_s = 15$ V     |
| 4. $P_{AC} = 65$ mW | 4. $P_{AC} = 45$ mW |

During output level state changes, a current surge will flow through the series connected N and P channel output MOSFETS as one device is turning "ON" while the other is turning "OFF". The current spike flows only during output transitions. The input levels should not be maintained between the logic '0' and logic '1' levels. **Unused driver inputs must be tied to ground and not be allowed to float.** Average power dissipation will be reduced by minimizing input rise times. As shown in the characteristic curves, average supply current is frequency dependent.


# TC426/TC427/TC428

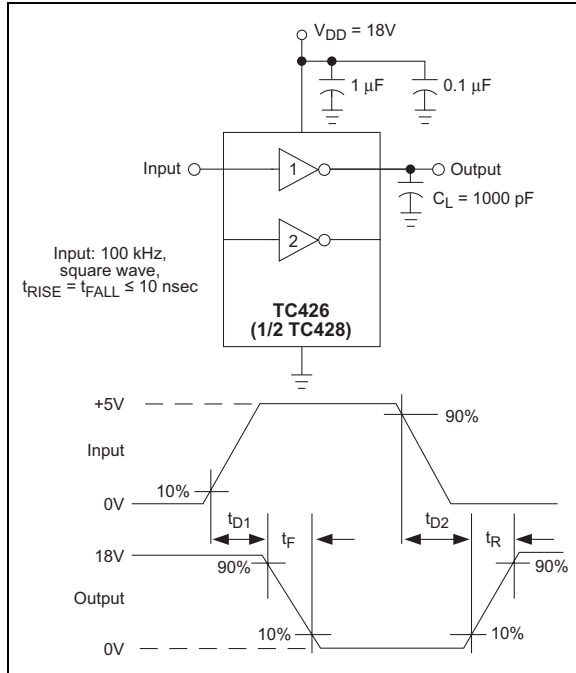


**FIGURE 3-1:** Inverting Driver Switching Time Test Circuit

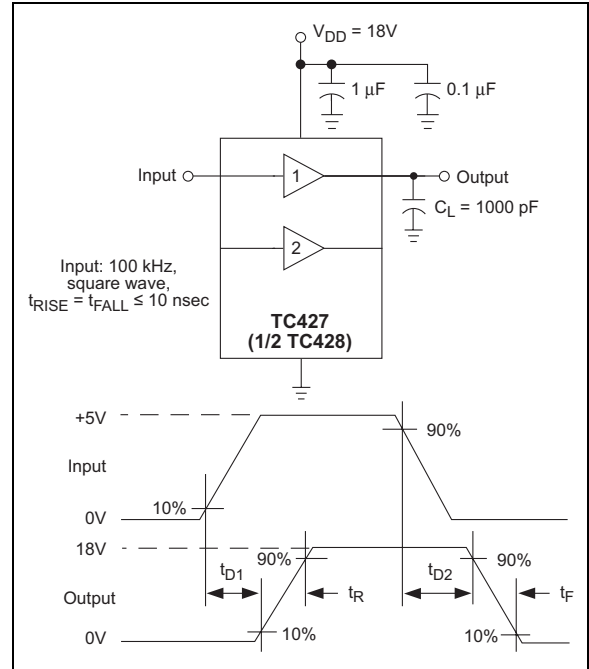

**FIGURE 3-2:** Noninverting Driver Switching Time Test Circuit

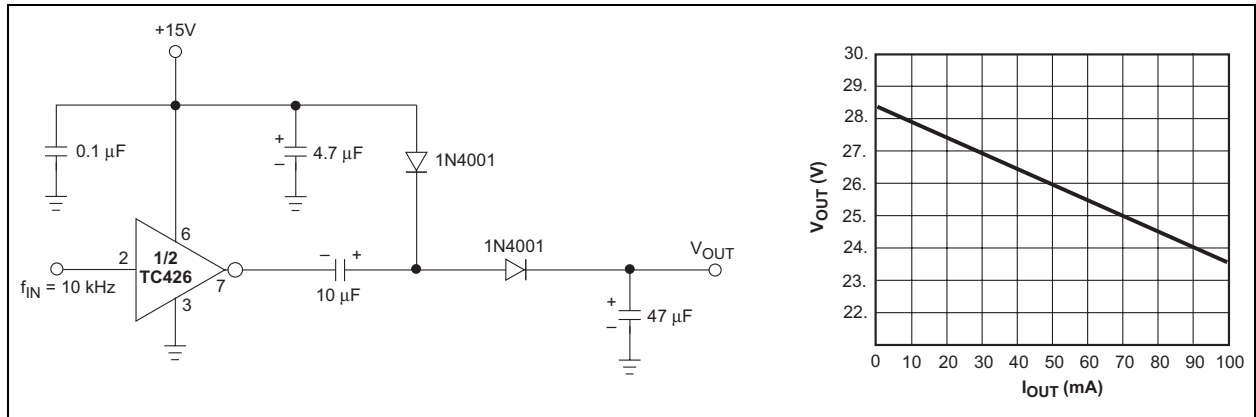

**FIGURE 3-3:** Voltage Doubler



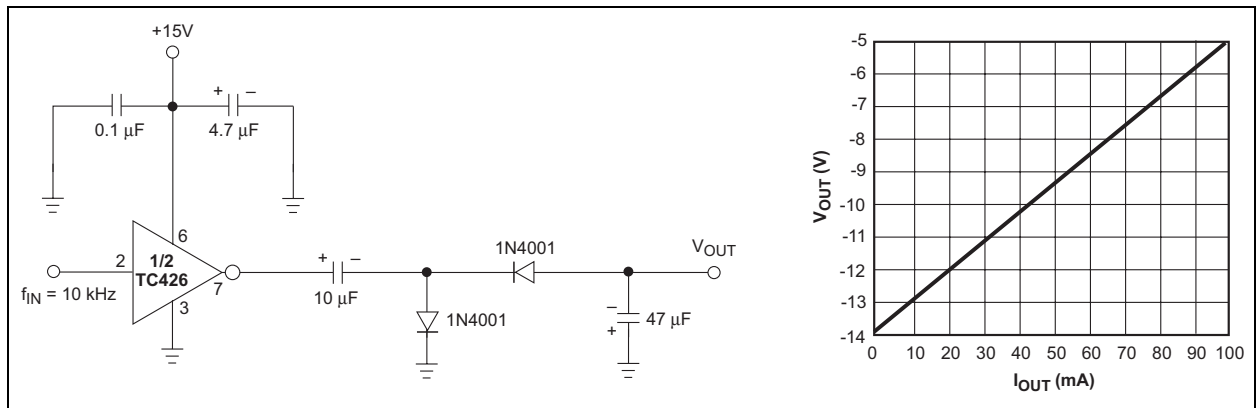


**FIGURE 3-4:** Voltage Inverter



# TC426/TC427/TC428

## 4.0 TYPICAL CHARACTERISTICS

**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

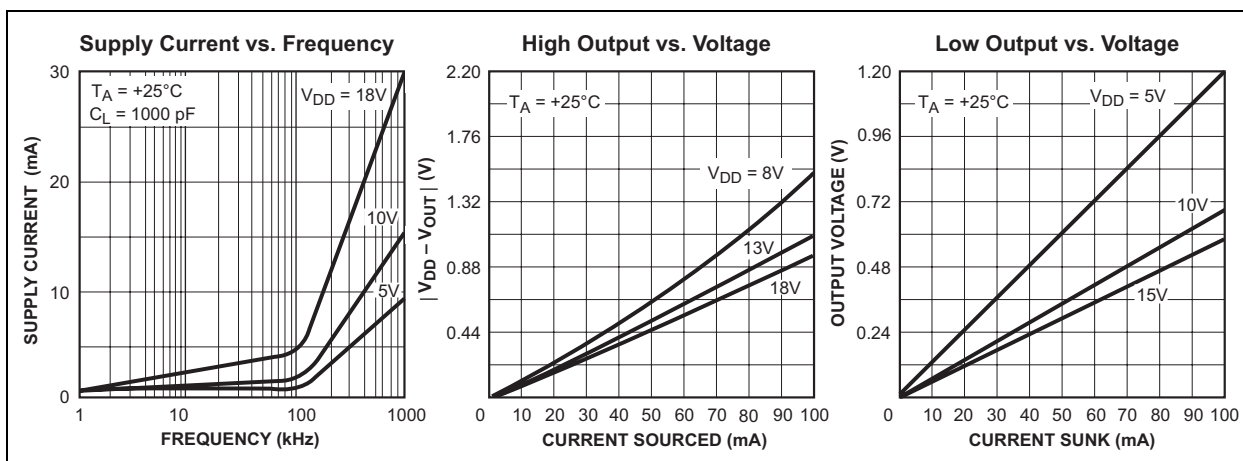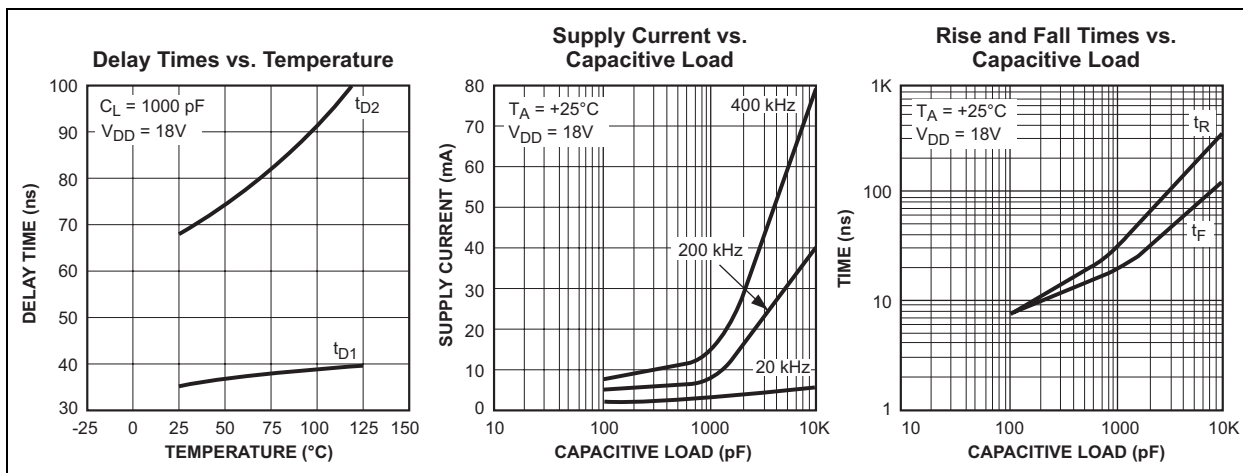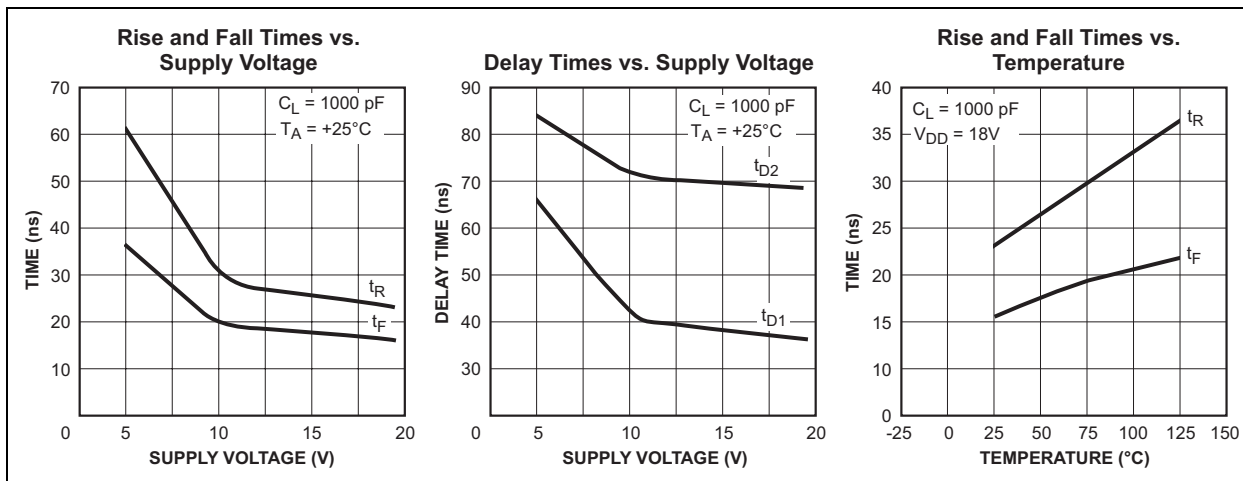

## TYPICAL CHARACTERISTICS (CONTINUED)

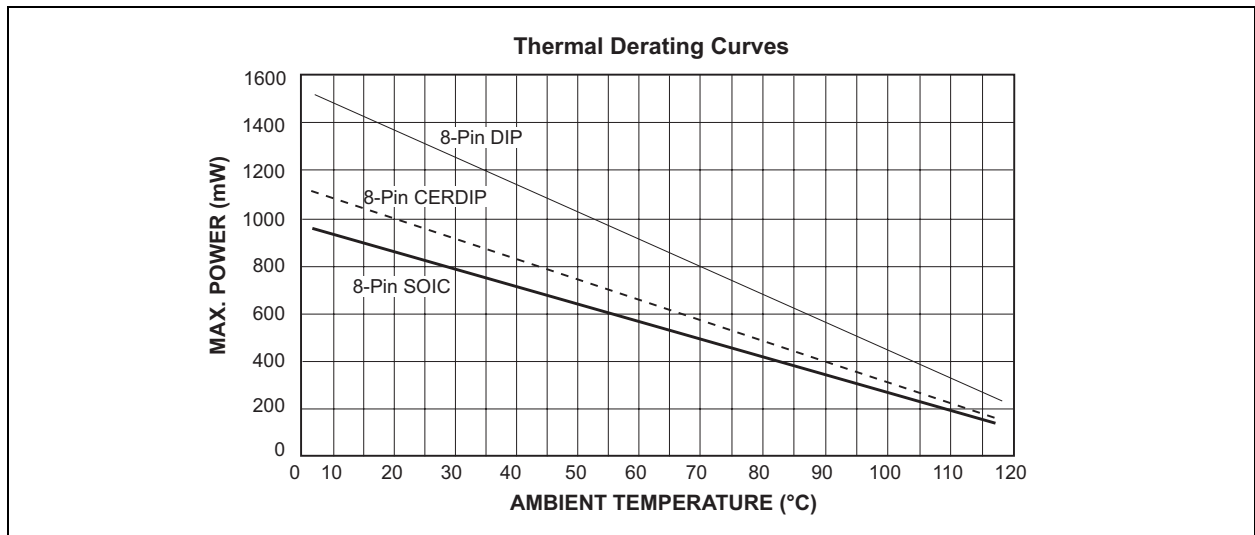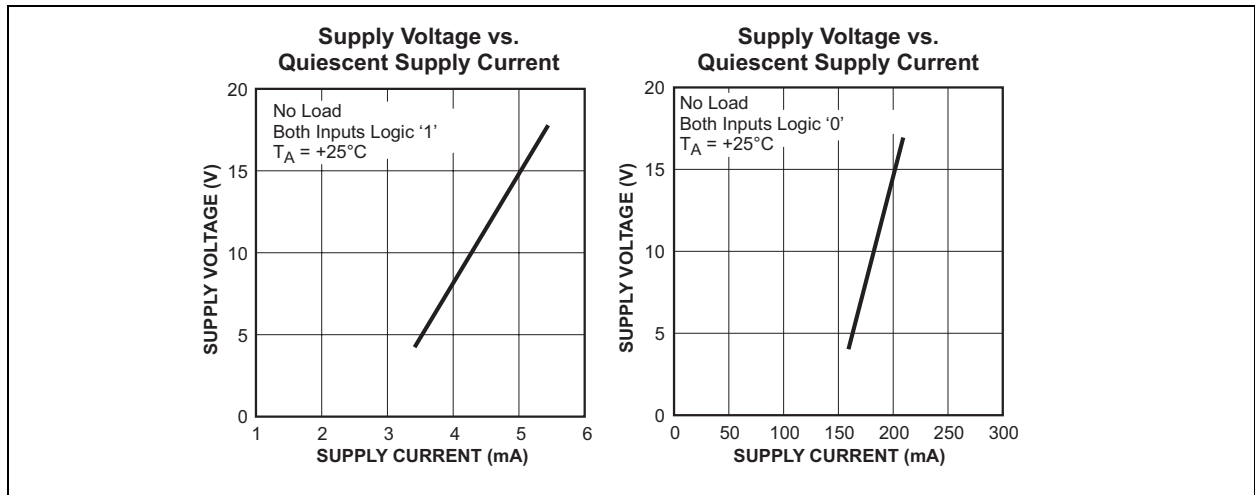

# TC426/TC427/TC428


## 5.0 PACKAGING INFORMATION

### 5.1 Package Marking Information

Package marking data not available at this time.

### 5.2 Taping Form

#### Component Taping Orientation for 8-Pin MSOP Devices

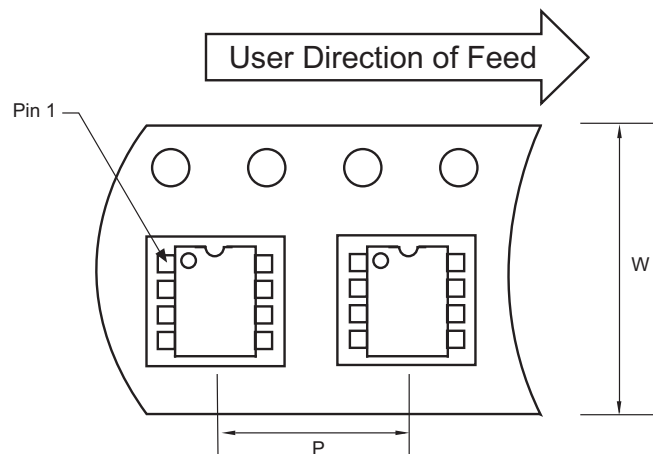


Standard Reel Component Orientation  
for 713 Suffix Device

Carrier Tape, Number of Components Per Reel and Reel Size

| Package    | Carrier Width (W) | Pitch (P) | Part Per Full Reel | Reel Size |
|------------|-------------------|-----------|--------------------|-----------|
| 8-Pin MSOP | 12 mm             | 8 mm      | 2500               | 13 in     |

#### Component Taping Orientation for 8-Pin SOIC (Narrow) Devices

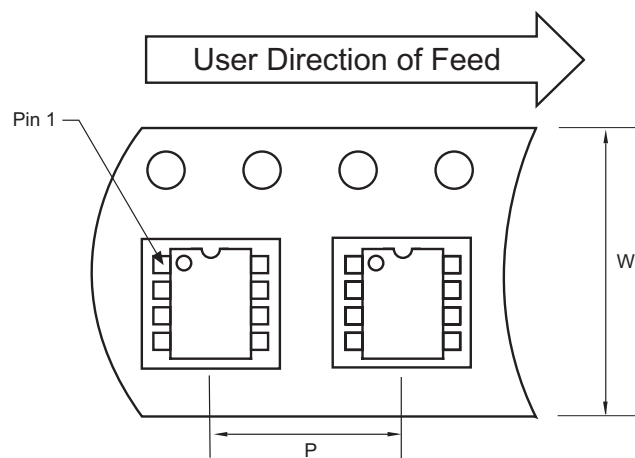


Standard Reel Component Orientation  
for 713 Suffix Device

Carrier Tape, Number of Components Per Reel and Reel Size

| Package        | Carrier Width (W) | Pitch (P) | Part Per Full Reel | Reel Size |
|----------------|-------------------|-----------|--------------------|-----------|
| 8-Pin SOIC (N) | 12 mm             | 8 mm      | 2500               | 13 in     |


## 5.3 Package Dimensions

### 8-Pin Plastic DIP

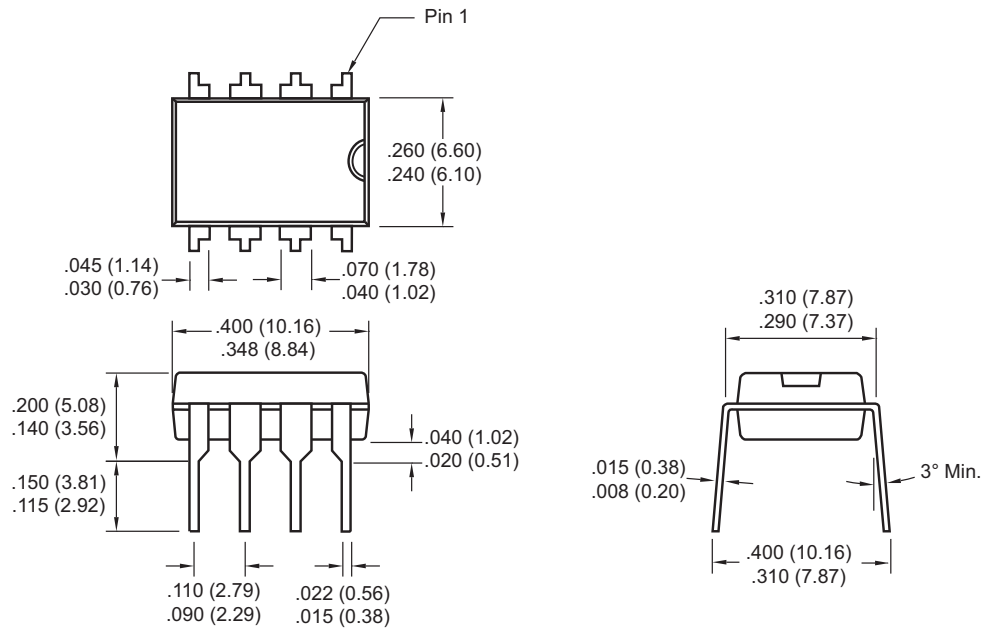

Dimensions: inches (mm)

### 8-Pin Cerdip (Narrow)



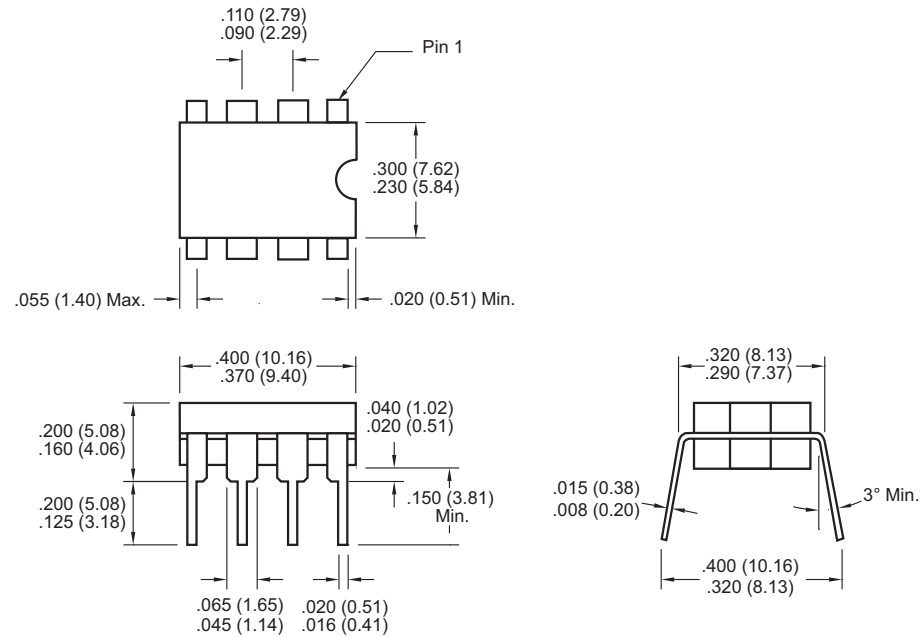


Dimensions: inches (mm)

# TC426/TC427/TC428

## Package Dimensions (Continued)

### 8-Pin SOIC

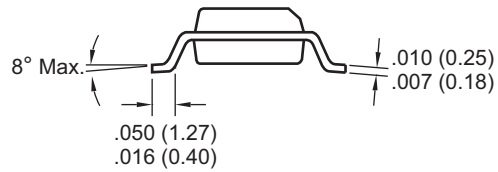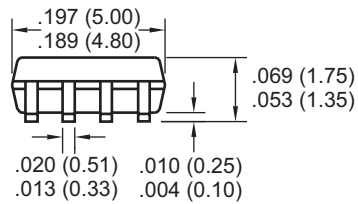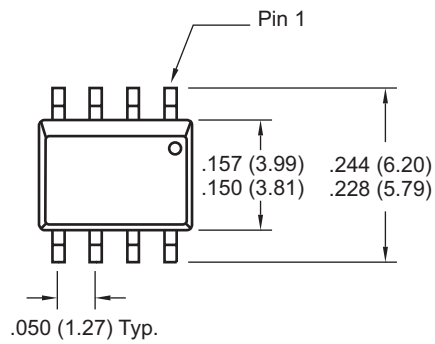

Dimensions: inches (mm)

## THE MICROCHIP WEB SITE

Microchip provides online support via our WWW site at [www.microchip.com](http://www.microchip.com). This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at [www.microchip.com](http://www.microchip.com), click on Customer Change Notification and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support
- Development Systems Information Line

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

**Technical support is available through the web site at: <http://support.microchip.com>**

# TC426/TC427/TC428

---

## READER RESPONSE

It is our intention to provide you with the best documentation possible to ensure successful use of your Microchip product. If you wish to provide your comments on organization, clarity, subject matter, and ways in which our documentation can better serve you, please FAX your comments to the Technical Publications Manager at (480) 792-4150.

Please list the following information, and use this outline to provide us with your comments about this document.

To: Technical Publications Manager  
RE: Reader Response  
Total Pages Sent \_\_\_\_\_  
From: Name \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_  
City / State / ZIP / Country \_\_\_\_\_  
Telephone: (\_\_\_\_) \_\_\_\_\_ - \_\_\_\_\_ FAX: (\_\_\_\_) \_\_\_\_\_ - \_\_\_\_\_

Application (optional):

Would you like a reply? \_\_\_Y \_\_\_N

Device: TC426/TC427/TC428

Literature Number: DS21415C

Questions:

1. What are the best features of this document?

---

---

2. How does this document meet your hardware and software development needs?

---

---

3. Do you find the organization of this document easy to follow? If not, why?

---

---

4. What additions to the document do you think would enhance the structure and subject?

---

---

5. What deletions from the document could be made without affecting the overall usefulness?

---

---

6. Is there any incorrect or misleading information (what and where)?

---

---

7. How would you improve this document?

---

---

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, Accuron, dsPIC, KEELoQ, microID, MPLAB, PIC, PICmicro, PICSTART, PRO MATE, PowerSmart, rfPIC, and SmartShunt are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

Amplab, FilterLab, Migratable Memory, MXDEV, MXLAB, SEEVAL, SmartSensor and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, dsPICDEM, dsPICDEM.net, dsPICworks, ECAN, ECONOMONITOR, FanSense, FlexROM, fuzzyLAB, In-Circuit Serial Programming, ICSP, ICEPIC, Linear Active Thermistor, Mindi, MiWi, MPASM, MPLIB, MPLINK, PICkit, PICDEM, PICDEM.net, PICLAB, PICtail, PowerCal, PowerInfo, PowerMate, PowerTool, REAL ICE, rLAB, rfPICDEM, Select Mode, Smart Serial, SmartTel, Total Endurance, UNI/O, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2006, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**== ISO/TS 16949:2002 ==**

*Microchip received ISO/TS-16949:2002 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona, Gresham, Oregon and Mountain View, California. The Company's quality system processes and procedures are for its PICmicro® 8-bit MCUs, KEELoQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*



## WORLDWIDE SALES AND SERVICE

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://support.microchip.com>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

#### Atlanta

Alpharetta, GA  
Tel: 770-640-0034  
Fax: 770-640-0307

#### Boston

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

#### Chicago

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

#### Dallas

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

#### Detroit

Farmington Hills, MI  
Tel: 248-538-2250  
Fax: 248-538-2260

#### Kokomo

Kokomo, IN  
Tel: 765-864-8360  
Fax: 765-864-8387

#### Los Angeles

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

#### San Jose

Mountain View, CA  
Tel: 650-215-1444  
Fax: 650-961-0286

#### Toronto

Mississauga, Ontario,  
Canada  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

**China - Beijing**  
Tel: 86-10-8528-2100  
Fax: 86-10-8528-2104

**China - Chengdu**  
Tel: 86-28-8676-6200  
Fax: 86-28-8676-6599

**China - Fuzhou**  
Tel: 86-591-8750-3506  
Fax: 86-591-8750-3521

**China - Hong Kong SAR**  
Tel: 852-2401-1200  
Fax: 852-2401-3431

**China - Qingdao**  
Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

**China - Shanghai**  
Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

**China - Shenyang**  
Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

**China - Shenzhen**  
Tel: 86-755-8203-2660  
Fax: 86-755-8203-1760

**China - Shunde**  
Tel: 86-757-2839-5507  
Fax: 86-757-2839-5571

**China - Wuhan**  
Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

**China - Xian**  
Tel: 86-29-8833-7250  
Fax: 86-29-8833-7256

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-4182-8400  
Fax: 91-80-4182-8422

**India - New Delhi**  
Tel: 91-11-5160-8631  
Fax: 91-11-5160-8632

**India - Pune**  
Tel: 91-20-2566-1512  
Fax: 91-20-2566-1513

**Japan - Yokohama**  
Tel: 81-45-471- 6166  
Fax: 81-45-471-6122

**Korea - Gumi**  
Tel: 82-54-473-4301  
Fax: 82-54-473-4302

**Korea - Seoul**  
Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

**Malaysia - Penang**  
Tel: 60-4-646-8870  
Fax: 60-4-646-5086

**Philippines - Manila**  
Tel: 63-2-634-9065  
Fax: 63-2-634-9069

**Singapore**  
Tel: 65-6334-8870  
Fax: 65-6334-8850

**Taiwan - Hsin Chu**  
Tel: 886-3-572-9526  
Fax: 886-3-572-6459

**Taiwan - Kaohsiung**  
Tel: 886-7-536-4818  
Fax: 886-7-536-4803

**Taiwan - Taipei**  
Tel: 886-2-2500-6610  
Fax: 886-2-2508-0102

**Thailand - Bangkok**  
Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-399  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**UK - Wokingham**  
Tel: 44-118-921-5869  
Fax: 44-118-921-5820