
TIP36CA

TRIPLE DIFFUSED PNP TRANSISTOR

HIGH POWER AMPLIFIER APPLICATION.

FEATURES

- Recommended for 75W Audio Frequency Amplifier Output Stage.
- Complementary to TIP35CA.
- Icmax:-25A.

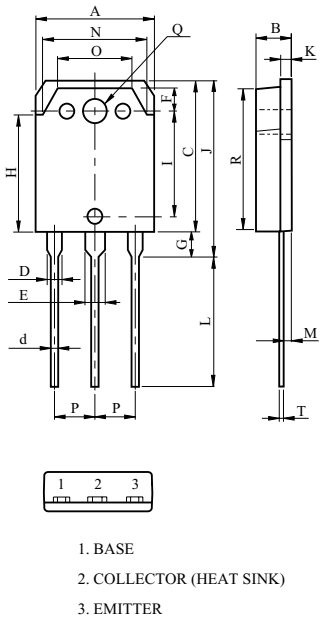

DIM	MILLIMETERS
A	15.60 ± 0.20
B	4.80 ± 0.20
C	19.90 ± 0.20
D	2.00 ± 0.20
d	1.00 ± 0.20
E	3.00 ± 0.20
F	3.80 ± 0.20
G	3.50 ± 0.20
H	13.90 ± 0.20
I	12.76 ± 0.20
J	23.40 ± 0.20
K	1.5+0.15-0.05
L	16.50 ± 0.30
M	1.40 ± 0.20
N	13.60 ± 0.20
O	9.60 ± 0.20
P	5.45 ± 0.30
Q	ϕ 3.20 ± 0.10
R	18.70 ± 0.20
T	0.60+0.15-0.05

TO-3P(N)-E

MAXIMUM RATING (Ta=25℃)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-100	V
Collector-Emitter Voltage	V_{CEO}	-100	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-25	A
Base Current	I_B	-5.0	A
Collector Power Dissipation (Tc=25℃)	P_C	125	W
Junction Temperature	T_j	150	℃
Storage Temperature Range	T_{stg}	-55～150	℃

ELECTRICAL CHARACTERISTICS (Ta=25℃)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	V_{CB}=-100V, I_E=0	-	-	-10	μA
Emitter Cut-off Current	I_{EBO}	V_{EB}=-5V, I_C=0	-	-	-10	μA
Collector-emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C=-50mA, I_B=0	-100	-	-	V
DC Current Gain	h_{FE}(1) (Note)	V_{CE}=-5V, I_C=-1.5A	55	-	160	
	h_{FE}(2)	V_{CE}=-4V, I_C=-15A	15	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$(1)	I_C=-15A, I_B=-1.5A	-	-	-1.8	V
	$V_{CE(sat)}$(2)	I_C=-25A, I_B=-5.0A	-	-	-4.0	
Base-Emitter Voltage	V_{BE}	V_{CE}=-5V, I_C=-5A	-	-	-1.5	V
Transition Frequency	f_T	V_{CE}=-5V, I_C=-1A	3.0	-	-	MHz

Note : h_{FE}(1) Classification R:55~110, O:80~160


SWITCHING CHARACTERISTICS

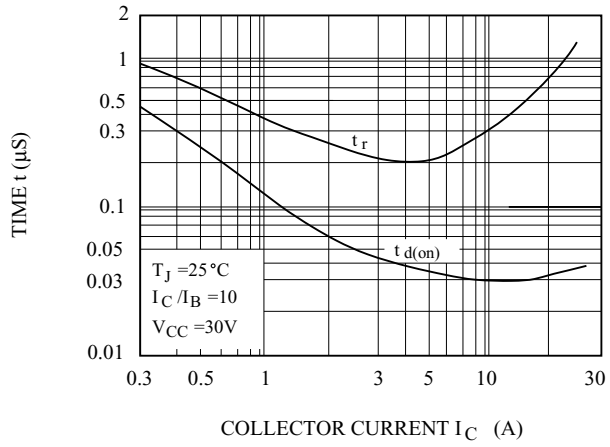


SWITCHING CHARACTERISTICS

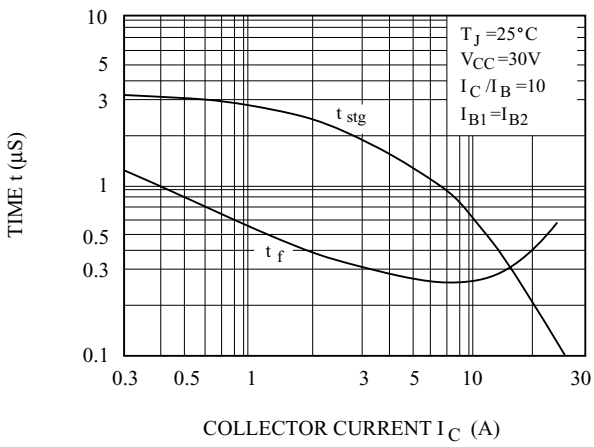


h_{FE} - I_C

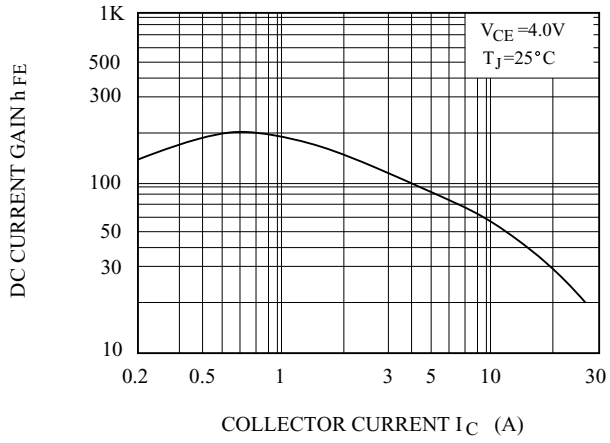

REVERSE BIAS SAFE OPERATING AREA

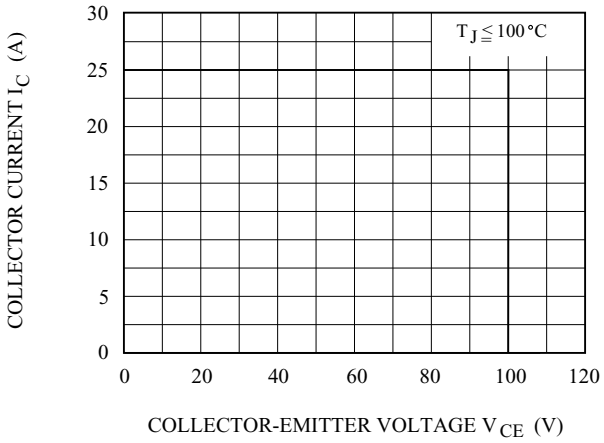

P_D - Tc

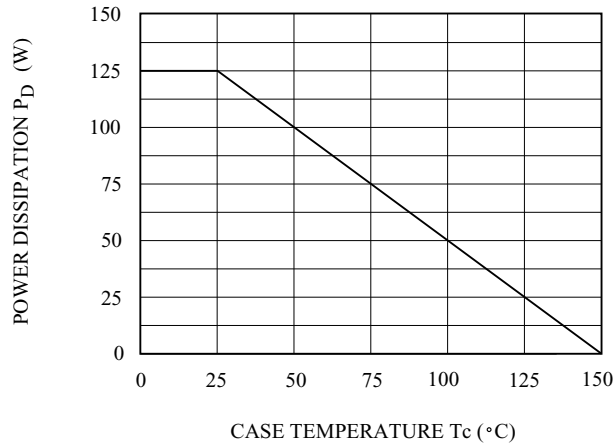

FORWARD BIAS SAFE OPERATING AREA

