


DESCRIPTION: 40W 1.5KVDC Isolated Wide Input Voltage DC/DC Converters

The rated output power of TP40DG converters is 40W, the outline dimensions is "50.8*50.8*12.7", 2:1,4:1 input voltage range, the voltage range is 9V-18V, 9V-36V, 18V-36V, 36V-72V. The accuracy of the converter can reach $\pm 1\%$, it can be widely used in telecommunications, railway transportation, instrument and etc.

FEATURES

40W output power	2:1,4:1 input voltage range	Input under voltage protection
50.8mm*50.8mm*12.7mm standard package	Fixed switching frequency	Super capability with capacitive load
Long term short-circuit protection	Operating temperature: -40℃ to 85℃	RoHs compliance

SELECTION GUIDE

Part Number	Input Voltage		Output		Efficiency(Typ.) %
	voltage (VDC)		Voltage (VDC)	Current (A)	
	Rated	Range values			
TP40DG12S03	12(2:1)	9-18	3.3	8	85
TP40DG12S05	12(2:1)	9-18	5	8	83
TP40DG12S12	12(2:1)	9-18	12	3.33	86
TP40DG12S15	12(2:1)	9-18	15	2.67	86
TP40DG12S24	12(2:1)	9-18	24	1.67	85
TP40DG12D05	12(2:1)	9-18	±5	±4	83
TP40DG12D12	12(2:1)	9-18	±12	±1.67	86
TP40DG12D15	12(2:1)	9-18	±15	±1.33	86
TP40DG24S03	24(2:1)	18-36	3.3	8	85
TP40DG24S05	24(2:1)	18-36	5	8	84
TP40DG24S12	24(2:1)	18-36	12	3.33	87
TP40DG24S15	24(2:1)	18-36	15	2.67	87
TP40DG24S24	24(2:1)	18-36	24	1.67	86
TP40DG24D05	24(2:1)	18-36	±5	±4	83
TP40DG24D12	24(2:1)	18-36	±12	±1.67	86
TP40DG24D15	24(2:1)	18-36	±15	±1.33	86
TP40DG48S03	48(2:1)	36-72	3.3	8	85
TP40DG48S05	48(2:1)	36-72	5	8	84
TP40DG48S12	48(2:1)	36-72	12	3.33	87
TP40DG48S15	48(2:1)	36-72	15	2.67	87
TP40DG48S24	48(2:1)	36-72	24	1.67	86
TP40DG48D05	48(2:1)	36-72	±5	±4	83
TP40DG48D12	48(2:1)	36-72	±12	±1.67	86
TP40DG48D15	48(2:1)	36-72	±15	±1.33	86
TP40DG24S05W	24(4:1)	9-36	5	8	84
TP40DG24S12W	24(4:1)	9-36	12	3.33	87

All specifications typical at TA=25℃, nominal input voltage and rated output current unless otherwise specified.

GENERAL CHARACTERISTICS

parameter	Test conditions	Min	Typ	Max	Units
Isolation voltage	Input to output		500	1500	VDC
Insulation resistance	Input to output	100M			Ohm
Seismic	10~55Hz		5		G
MTBF	MIL-HDBK-217F2		5x10 ⁵		hrs
Over-current protection mode	All input range	Burp, Automatic recovery			
Cooling	Free air convection				
Case material	Metal case				

INPUT CHARACTERISTICS

parameter	Test conditions	Min	Typ	Max	Units
Startup voltage	The12V input module(9V-18V)	9.2	9.5	9.8	VDC
Startup voltage	The24V input module(18V-36V)			18	VDC
Startup voltage	The48Vinput module(36V-72V)			36	VDC
Input under voltage protection	The12V/24V input module(9V-18V,9V-36V)			8.5	VDC
Input under voltage protection	The24V input module(18V-36V)			17	VDC
Input under voltage protection	The48Vinput module(36V-72V)			35	VDC
Startup time	Output rise time from 5% to 100%	20			ms
Remote control CTL	Remote CTL-Vin		Turn off		
Remote control CTL	Remote CTL NC(The control level 12V-40V)		Turn on		

OUTPUT CHARACTERISTICS

parameter	Test conditions	Min	Typ	Max	Units
Voltage accuracy	Io=0.1...1.0 x Ionom Vi=Vi rated			±1	%
Line regulation	Vimin≤Vi≤Vimax			±0.2	%
Load regulation	Io=0.1...1.0 x Ionom Vimin≤ Vi≤Vimax			±0.5	%
Auxiliary voltage accuracy	Main Load and auxiliary load differ 25%,the auxiliary circuit of the load with at least 25%, the main circuit with full load			±3	%
Ripple and noise	20MHz bandwidth			±1	%
Over-current protection	Vimin≤Vi≤Vimax	120			%
Output voltage trim range	Vimin≤Vi≤Vimax			10	%
Transient recovery time	25% load changes			±5	%
Transient overshoot time	25% load changes			400	us
Switch frequency	Vimin≤Vi≤Vimax		300		KHz


ENVIRONMENT CHARACTERISTICS

parameter	Test conditions	Min	Typ	Max	Units
Storage Humidity	Non condensing	5		+95	%
Operating Temperature	Power derating (above 71℃	-40		+85	℃
Storage Temperature		-55		+125	℃
Max. Case Temperature	Operating Temperature curve range			105	℃
Lead Temperature	1.5mm from case for 10 seconds			300	℃
Cooling	Free air convection				

- Module in every environment temperature rating, case temperature under shall not exceed the maximum case temperature level.

MECHANICAL DIMENSIONS


DIP Package

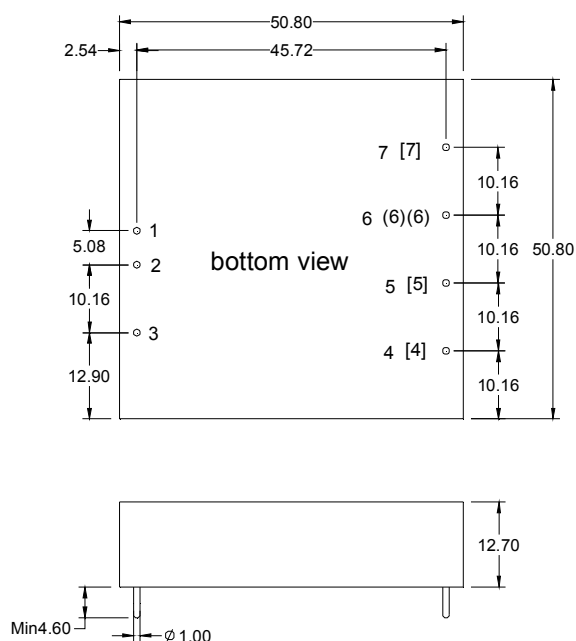

PIN CONNECTIONS


Pin	Single output	Dual output
1	+Vin	+Vin
2	-Vin	-Vin
3	CTL	CTL
4	TRM	TRM
[4]	/	/
5	-Vout	-Vout
[5]	/	/
6	+Vout	/
(6)	/	COM
[6]	/	/
7	/	+Vout
[7]	/	/

MODEL SELECTION

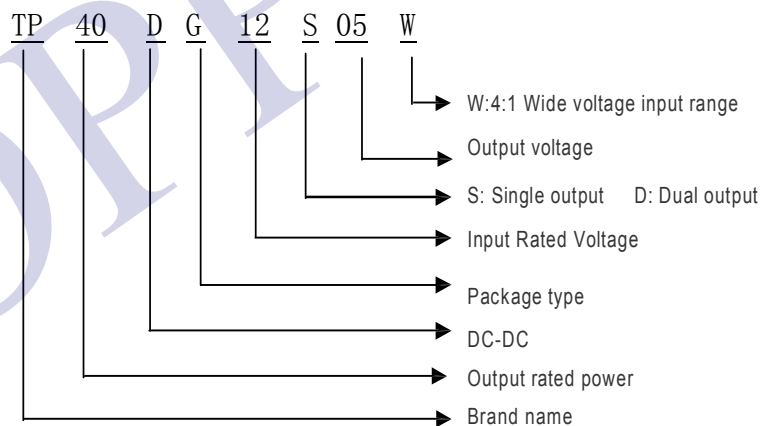


RECOMMEND CIRCUIT

Single Output:

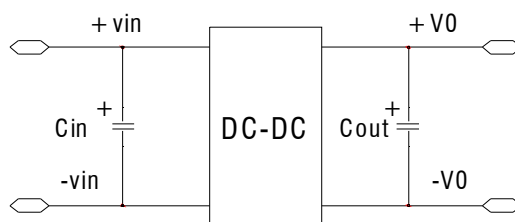


RECOMMEND CIRCUIT

Dual Output:

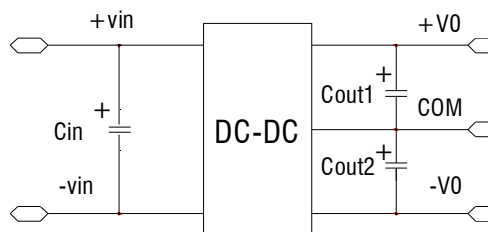

- Add input capacitance C_{in} is helpful to improve the electromagnetic compatibility, recommend C_{in} use 47 μ F-100 μ F of the electrolytic capacitors.
- If the module connect to the digital circuits, please add the C_{out} , C_{out1} , C_{out2} .
- If C_{out} , C_{out1} , C_{out2} value is too high or lower ESR, it will cause the module instable,
- The recommended value of C_{out} , C_{out1} , C_{out2} should be 100 μ F/A, the current here means the output current.

Trim application & Trim Resistance

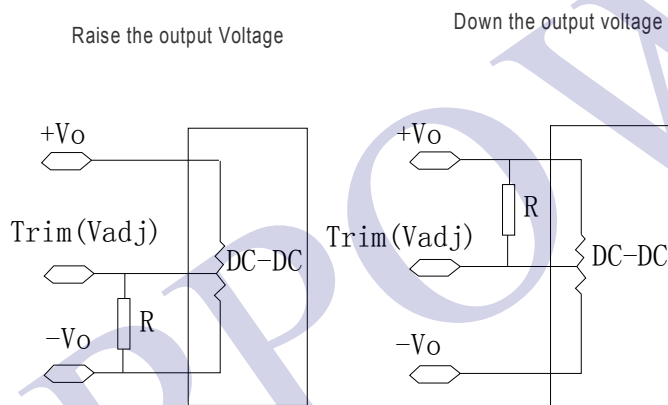

- In dual and triple output modules, this application can just used in the main load(auxiliary road change together with the main load)

USING ATTENTIONS

- Module will cause irreversible damage when in the state of the input reverse polarity.
- Module will cause irreversible damage when in the long-term overload conditions.
- Module will cause irreversible damage when out of the maximum input voltage range.

TEMPERATURE RATING: 0°C