TPS2296xC 5.5-V, 3-A, 13-mΩ On-Resistance Load Switch With Reverse Current Protection and Controlled Turn-On

1 Features

- Integrated N-Channel Load Switch
- Input Voltage Range: 1 V to 5.5 V
- Internal Pass-FET R_{DSON} = 8 mΩ (Typ)
- Ultra-Low ON-Resistance
  - R_{ON} = 13 mΩ (Typ) at V_{IN} = 5 V
  - R_{ON} = 14 mΩ (Typ) at V_{IN} = 3.3 V
  - R_{ON} = 18 mΩ (Typ) at V_{IN} = 1.8 V
- 3A Maximum Continuous Switch Current
- Reverse Current Protection (When Disabled)
- Low Shutdown Current (760 nA)
- Low Threshold 1.3-V GPIO Control Input
- Controlled Slew-Rate to Avoid Inrush Current
- Quick Output Discharge (TPS22964 only)
- Six Terminal Wafer-Chip-Scale Package (Nominal Dimensions Shown - See Addendum for Details)
  - 0.9 mm x 1.4 mm, 0.5 mm Pitch, 0.5 mm Height (YZP)
- ESD Performance Tested Per JESD 22
  - 2-kV Human-Body Model (A114-B, Class II)
  - 500-V Charged-Device Model (C101)

2 Applications

- Smartphones
- Notebook Computer and Ultrabook™
- Tablet PC Computer
- Solid State Drives (SSD)
- DTV/IP Set Top Box
- POS Terminals and Media Gateways

3 Description

The TPS22963/64 is a small, ultra-low R_{ON} load switch with controlled turn on. The device contains a low R_{DSON} N-Channel MOSFET that can operate over an input voltage range of 1 V to 5.5 V and switch currents of up to 3 A. An integrated charge pump biases the NMOS switch in order to achieve a low switch ON-Resistance. The switch is controlled by an on/off input (ON), which is capable of interfacing directly with low-voltage GPIO control signals. The rise time of the TPS22963/64 device is internally controlled in order to avoid inrush current.

The TPS22963/64 provides reverse current protection. When the power switch is disabled, the device will not allow the flow of current towards the input side of the switch. The reverse current protection feature is active only when the device is disabled so as to allow for intentional reverse current (when the switch is enabled) for some applications.

The TPS22963/64 is available in a small, space-saving 6-pin WCSP package and is characterized for operation over the free air temperature range of –40°C to 85°C.

Device Information[1]

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TPS2296xC	DSBGA (6)	1.40 mm x 0.90 mm

(1) For all available packages, see the orderable addendum at the end of the datasheet.

4 Simplified Schematic

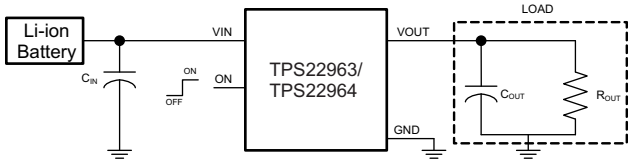

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 Features ... 1
2 Applications ... 1
3 Description ... 1
4 Simplified Schematic ... 1
5 Revision History ... 2
6 Device Comparison Table ... 3
7 Pin Configuration and Functions ... 3
8 Specifications ... 4
8.1 Absolute Maximum Ratings ... 4
8.2 ESD Ratings ... 4
8.3 Recommended Operating Conditions ... 4
8.4 Thermal Information ... 4
8.5 Electrical Characteristics ... 5
8.6 Switching Characteristics ... 6
8.7 Typical Electrical Characteristics ... 7
8.8 Typical Switching Characteristics ... 9
8.9 Typical AC Scope Captures at T_A = 25ºC ... 10
9 Parametric Measurement Information ... 13
10 Detailed Description ... 14
10.1 Overview ... 14
10.2 Functional Block Diagram ... 14
10.3 Feature Description ... 15
10.4 Device Functional Modes ... 15
11 Application and Implementation ... 15
11.1 Application Information ... 15
11.2 Typical Application ... 17
12 Power Supply Recommendations ... 19
13 Layout ... 19
13.1 Layout Guidelines ... 19
13.2 Layout Example ... 19
14 Device and Documentation Support ... 20
14.1 Related Links ... 20
14.2 Trademarks ... 20
14.3 Electrostatic Discharge Caution ... 20
14.4 Glossary ... 20
15 Mechanical, Packaging, and Orderable Information ... 20

5 Revision History

Changes from Original (June 2013) to Revision A **Page**

- Added *Pin Configuration and Functions* section, *ESD Ratings* table, *Feature Description* section, *Device Functional Modes*, *Application and Implementation* section, *Power Supply Recommendations* section, *Layout* section, *Device and Documentation Support* section, and *Mechanical, Packaging, and Orderable Information* section ... 1

Copyright © 2013–2015, Texas Instruments Incorporated

6 Device Comparison Table

	R_{ON} (Typ) at 3.3 V	Rise Time (Typ) at 3.3 V(1)	Quick Output Discharge (QOD)(2)	Maximum Output Current	Enable
TPS22963C	14 mΩ	715 µs	No	3 A	Active High
TPS22964C	14 mΩ	715 µs	Yes	3 A	Active High

(1) Additional rise time options are possible. Contact factory for more information.
(2) This feature discharges the output of the switch to ground through a 273 Ω resistor, preventing the output from floating (only in TPS22964C).

7 Pin Configuration and Functions

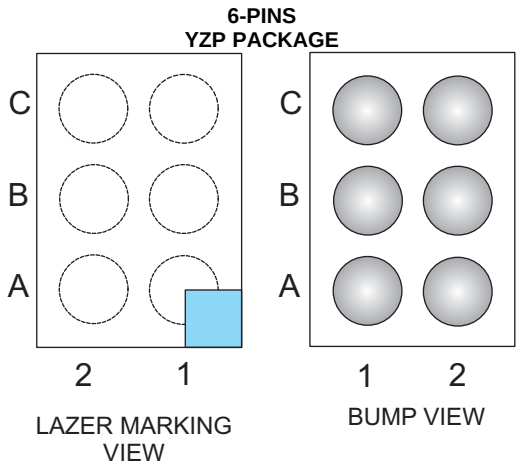

Pin Assignments (YZP Package)

C	GND	ON
B	VOUT	VIN
A	VOUT	VIN
	1	**2**

Pin Functions

PIN		I/O	DESCRIPTION
TPS22963/64	**NAME**		
C1	GND	-	Ground
C2	ON	I	Switch control input, active high. Do not leave floating
A1, B1	VOUT	O	Switch output
A2, B2	VIN	I	Switch input. Use a bypass capacitor to ground (ceramic)

Copyright © 2013–2015, Texas Instruments Incorporated

8 Specifications

8.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
V_{IN}	Input voltage range	–0.3	6	V
V_{OUT}	Output voltage range	–0.3	6	V
V_{ON}	ON pin voltage range	–0.3	6	V
I_{MAX}	Maximum continuous switch current		3	A
I_{PLS}	Maximum pulsed switch current, 100 µs pulse, 2% duty cycle, T_A = –40°C to 85°C		4	A
T_A	Operating free air temperature range	–40	85	°C
T_J	Maximum junction temperature		125	°C
T_{stg}	Storage temperature range	–65	150	°C

8.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±2000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 (2)	±500	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible with the necessary precautions.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible with the necessary precautions.

8.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	TYP	MAX	UNIT
V_{IN}	Input voltage range		1		5.5	V
V_{OUT}	Output voltage range		0		5.5	V
$V_{IH, ON}$	High-level ON voltage	V_{IN} = 2.5 V to 5.5 V	1.3		5.5	V
		V_{IN} = 1 V to 2.49 V	1.1		5.5	
$V_{IL, ON}$	Low-level ON voltage	V_{IN} = 2.5 V to 5.5 V	0		0.6	V
		V_{IN} = 1 V to 2.49 V	0		0.4	
C_{IN}	Input capacitor			1 (1)		µF

(1) Refer to the application section

8.4 Thermal Information

THERMAL METRIC (1)		TPS2296xC YZP 6 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	132.0	°C/W
$R_{\theta JCtop}$	Junction-to-case (top) thermal resistance	1.4	
$R_{\theta JB}$	Junction-to-board thermal resistance	22.8	
ψ_{JT}	Junction-to-top characterization parameter	5.7	
ψ_{JB}	Junction-to-board characterization parameter	22.6	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, SPRA953.

Copyright © 2013–2015, Texas Instruments Incorporated

8.5 Electrical Characteristics

V_{IN} = 1 V to 5.5 V, T_A = –40°C to 85°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A	MIN	TYP	MAX	UNIT
$I_{Q, VIN}$	Quiescent current	I_{OUT} = 0, V_{ON} = V_{IN} = 5 V	Full		66.5	96	µA
		I_{OUT} = 0, V_{ON} = V_{IN} = 4.5 V	Full		57	82	
		I_{OUT} = 0, V_{ON} = V_{IN} = 3.3 V	Full		38	60	
		I_{OUT} = 0, V_{ON} = V_{IN} = 2.5 V	Full		33.3	55	
		I_{OUT} = 0, V_{ON} = V_{IN} = 1.8 V	Full		28.3	45	
		I_{OUT} = 0, V_{ON} = V_{IN} = 1.2 V	Full		22.8	36	
		I_{OUT} = 0, V_{ON} = V_{IN} = 1.1 V	Full		21.6	34	
		I_{OUT} = 0, V_{ON} = V_{IN} = 1 V	Full		20.3	33	
$I_{SD, VIN}$	Shut down current	V_{ON} = 0, V_{IN} = 5 V, V_{OUT} = 0 V	Full		0.76	2	µA
		V_{ON} = 0, V_{IN} = 1 V, V_{OUT} = 0 V	Full		0.07	0.8	
R_{ON}	On-resistance	V_{IN} = 5 V, I_{OUT} = –200 mA	25˚C		13.3	21	mΩ
			Full			26	
		V_{IN} = 4.5 V, I_{OUT} = –200 mA	25˚C		13.3	21	mΩ
			Full			26	
		V_{IN} = 3.3 V, I_{OUT} = –200 mA	25˚C		13.8	22	mΩ
			Full			27	
		V_{IN} = 2.5 V, I_{OUT} = –200 mA	25˚C		15.4	24	mΩ
			Full			29	
		V_{IN} = 1.8 V, I_{OUT} = –200 mA	25˚C		18.2	28	mΩ
			Full			33	
		V_{IN} = 1.2 V, I_{OUT} = –200 mA	25˚C		25.6	37	mΩ
			Full			44	
		V_{IN} = 1.1 V, I_{OUT} = –200 mA	25˚C		28.7	41	mΩ
			Full			50	
		V_{IN} = 1 V, I_{OUT} = –200 mA	25°C		33.8	48	mΩ
			Full			60	
$V_{HYS, ON}$	ON pin hysteresis	V_{IN} = 5 V	Full		115		mV
		V_{IN} = 4.5 V	Full		105		
		V_{IN} = 3.3 V	Full		80		
		V_{IN} = 2.5 V	Full		65		
		V_{IN} = 1.8 V	Full		50		
		V_{IN} = 1.2 V	Full		35		
		V_{IN} = 1.1 V	Full		30		
		V_{IN} = 1 V	Full		30		
I_{ON}	ON pin leakage current	V_{ON} = 1.1 V to 5.5 V	Full			150	nA
$I_{RC, VIN}$	Reverse current when disabled	V_{IN} = V_{ON} = 0 V, V_{OUT} = 5 V	25°C		–0.02		µA
			85°C		–2.1		
R_{PD} (1)	Output pulldown resistance	V_{ON} = 0 V, I_{OUT} = 2 mA	Full		273	325	Ω

(1) Available in TPS22964 only.

Copyright © 2013–2015, Texas Instruments Incorporated

8.6 Switching Characteristics

PARAMETER		TEST CONDITION	TPS22963/64	UNIT
			TYP	
V_{IN} = 5.0 V, T_A = 25°C (unless otherwise noted)				
t_{ON}	Turn-ON time	R_{OUT} = 10Ω, C_{IN} = 1µF, C_{OUT} = 0.1µF	928	µs
t_{OFF}	Turn-OFF time	R_{OUT} = 10Ω, C_{IN} = 1µF, C_{OUT} = 0.1µF	2.5	
t_R	VOUT rise time	R_{OUT} = 10Ω, C_{IN} = 1µF, C_{OUT} = 0.1µF	890	
t_F	VOUT fall time	R_{OUT} = 10Ω, C_{IN} = 1µF, C_{OUT} = 0.1µF	2.1	
t_D	Delay time	R_{OUT} = 10Ω, C_{IN} = 1µF, C_{OUT} = 0.1µF	561	
V_{IN} = 4.5 V, T_A = 25°C (unless otherwise noted)				
t_{ON}	Turn-ON time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	905	µs
t_{OFF}	Turn-OFF time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	2.6	
t_R	VOUT rise time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	859	
t_F	VOUT fall time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	2.1	
t_D	Delay time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	560	
V_{IN} = 3.3 V, T_A = 25°C (unless otherwise noted)				
t_{ON}	Turn-ON time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	836	µs
t_{OFF}	Turn-OFF time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	2.8	
t_R	VOUT rise time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	715	
t_F	VOUT fall time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	2	
t_D	Delay time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	553	
V_{IN} = 1.8 V, T_A = 25°C (unless otherwise noted)				
t_{ON}	Turn-ON time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	822	µs
t_{OFF}	Turn-OFF time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	2.8	
t_R	VOUT rise time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	651	
t_F	VOUT fall time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	2	
t_D	Delay time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	558	
V_{IN} = 1.2 V, T_A = 25°C (unless otherwise noted)				
t_{ON}	Turn-ON time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	852	µs
t_{OFF}	Turn-OFF time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	3.2	
t_R	VOUT rise time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	535	
t_F	VOUT fall time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	1.8	
t_D	Delay time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	594	
V_{IN} = 1.1 V, T_A = 25°C (unless otherwise noted)				
t_{ON}	Turn-ON time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	861	µs
t_{OFF}	Turn-OFF time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	3.5	
t_R	VOUT rise time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	518	
t_F	VOUT fall time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	1.9	
t_D	Delay time	R_{OUT} = 10 Ω, C_{IN} = 1 µF, C_{OUT} = 0.1 µF	604	

Copyright © 2013–2015, Texas Instruments Incorporated

8.7 Typical Electrical Characteristics

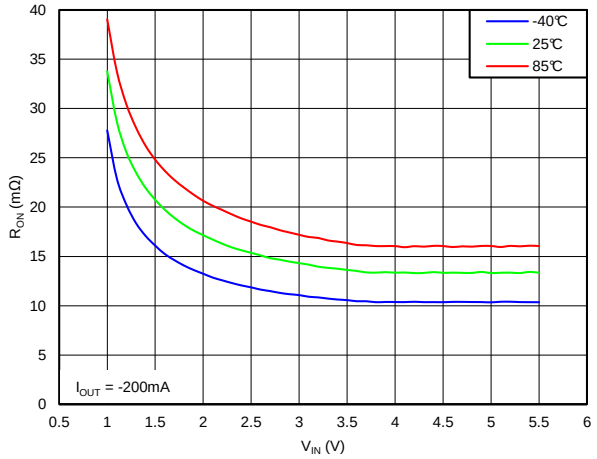

Figure 1. On Resistance vs V_{IN}

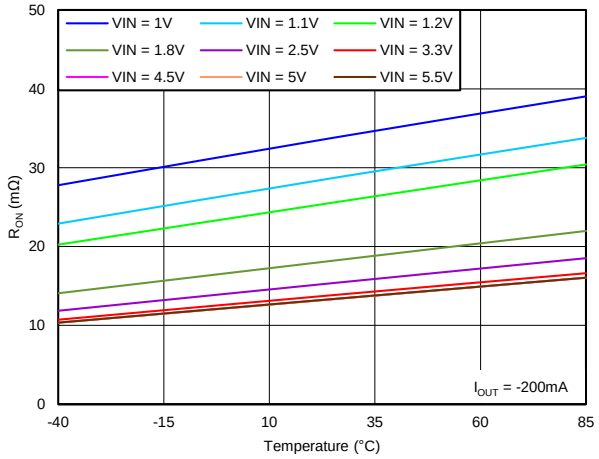

Figure 2. On Resistance vs Temperature

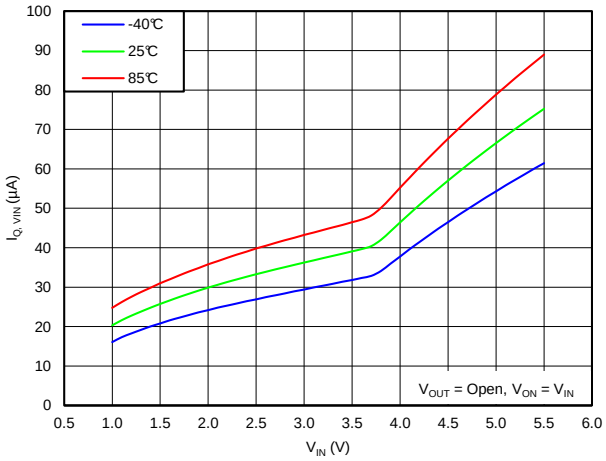

Figure 3. Quiescent Current vs V_{IN}

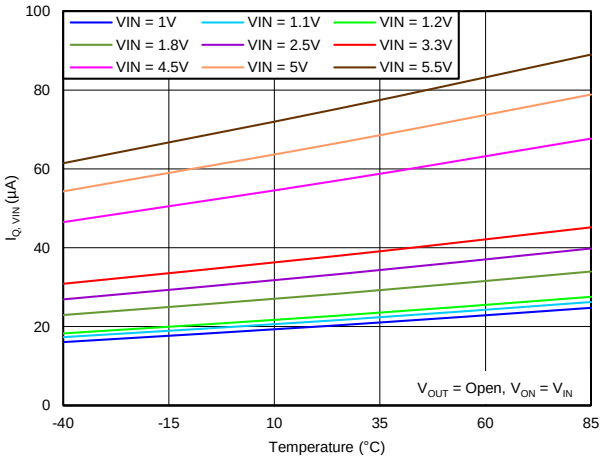

Figure 4. Quiescent Current vs Temperature

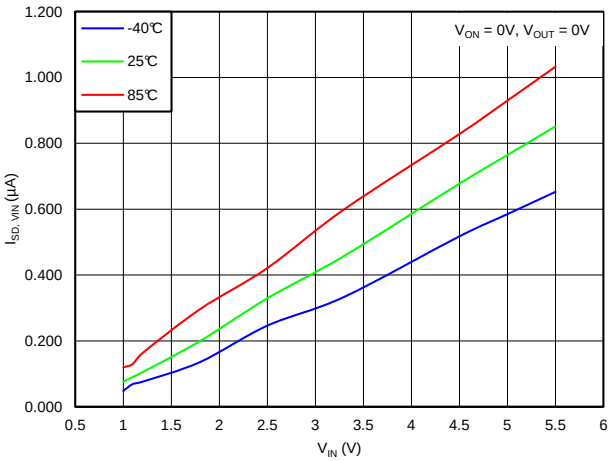

Figure 5. Shut Down Current vs V_{IN}

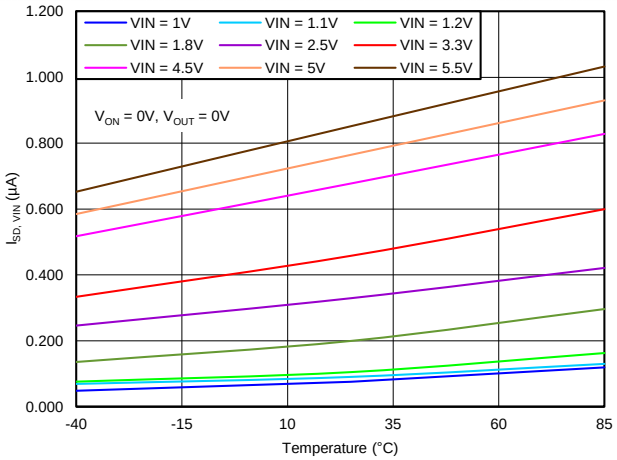

Figure 6. Shut Down Current vs Temperature

Typical Electrical Characteristics (continued)

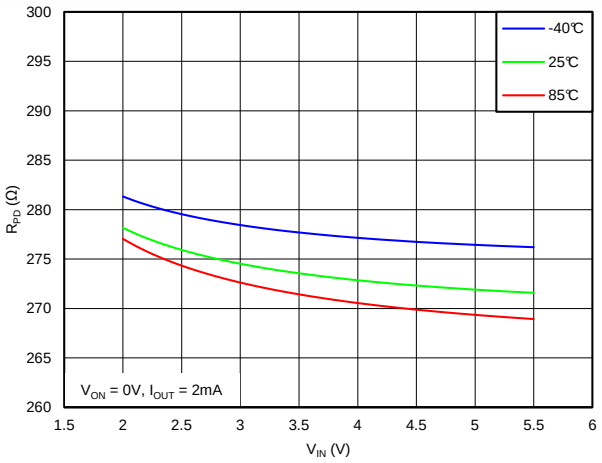

Figure 7. Output Pulldown Resistance vs V_{IN}

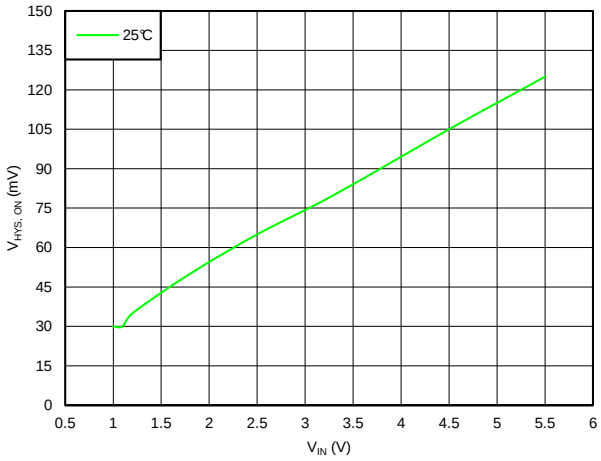

Figure 8. On Pin Hysteresis vs V_{IN}

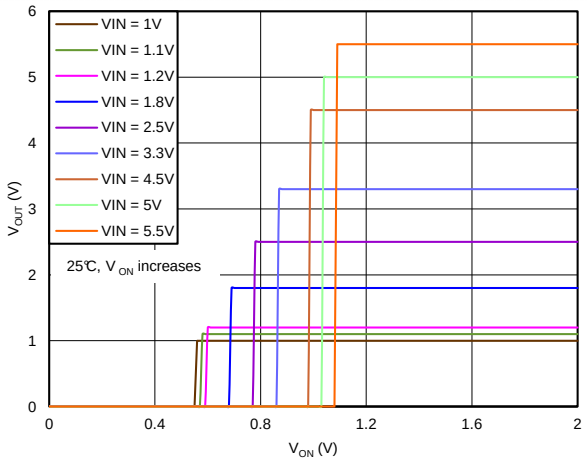

Figure 9. Output Voltage vs V_{ON} Rising

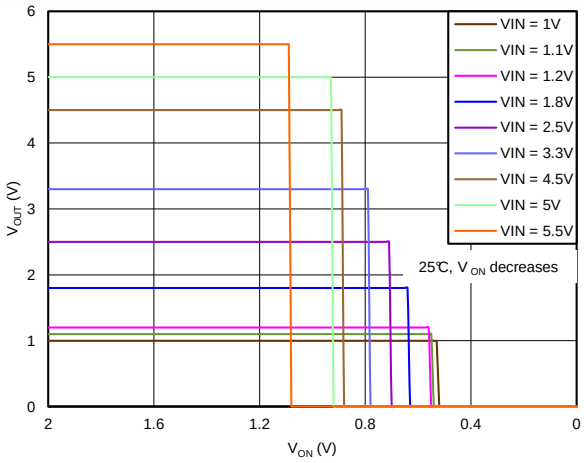

Figure 10. Output Voltage vs V_{ON} Falling

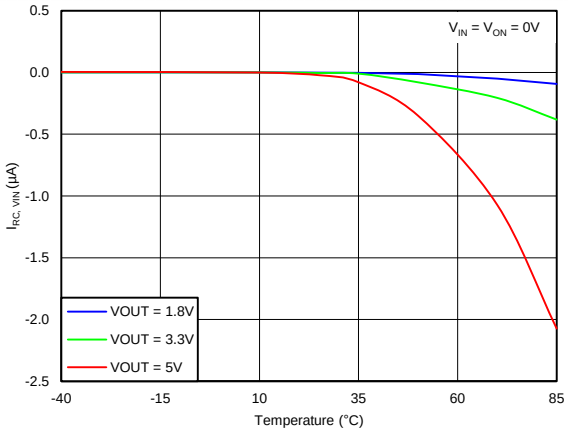

Figure 11. Reverse Current When Disabled vs Temperature

Copyright © 2013–2015, Texas Instruments Incorporated

8.8 Typical Switching Characteristics

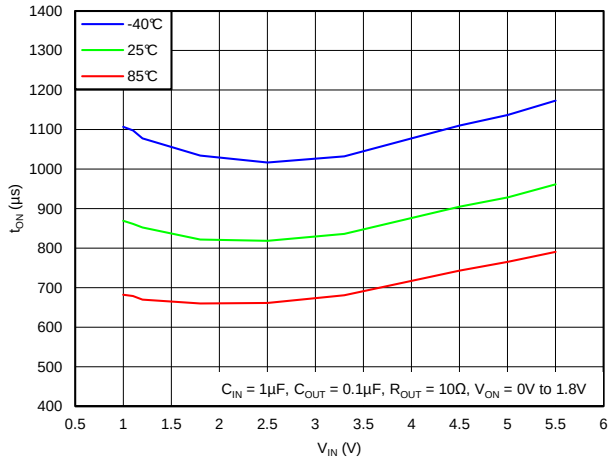

Figure 12. Turn-On Time vs V_{IN}

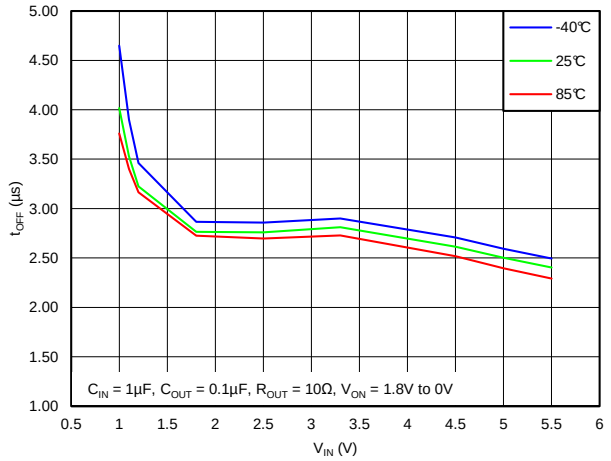

Figure 13. Turn-Off Time vs V_{IN}

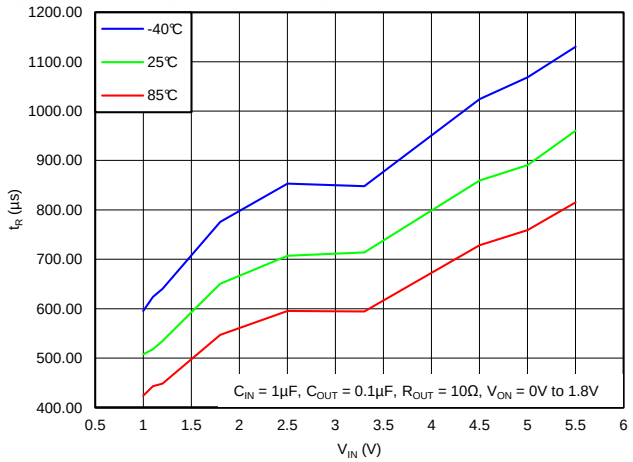

Figure 14. V_{OUT} Rise Time vs V_{IN}

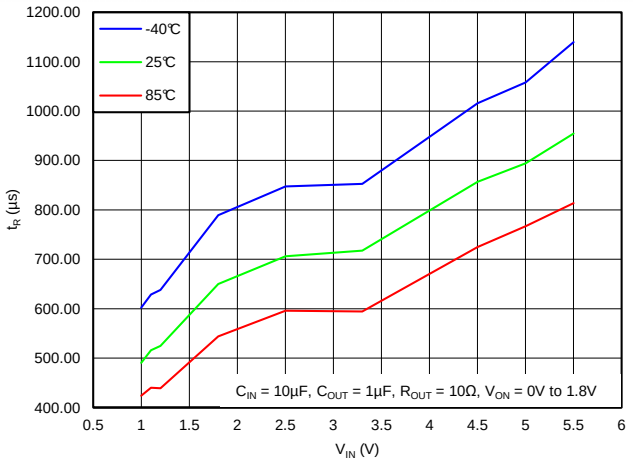

Figure 15. V_{OUT} Rise Time vs V_{IN}

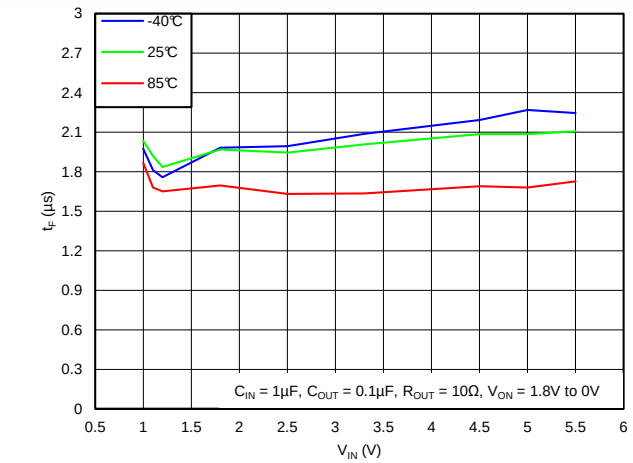

Figure 16. V_{OUT} Fall Time vs V_{IN}

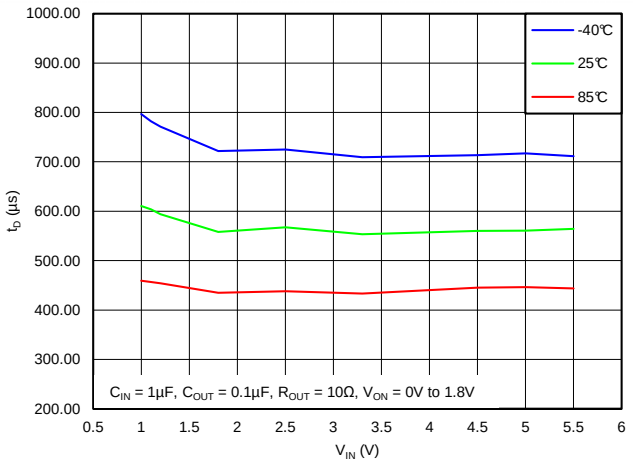

Figure 17. Delay Time vs V_{IN}

Copyright © 2013–2015, Texas Instruments Incorporated

8.9 Typical AC Scope Captures at T_A = 25ºC

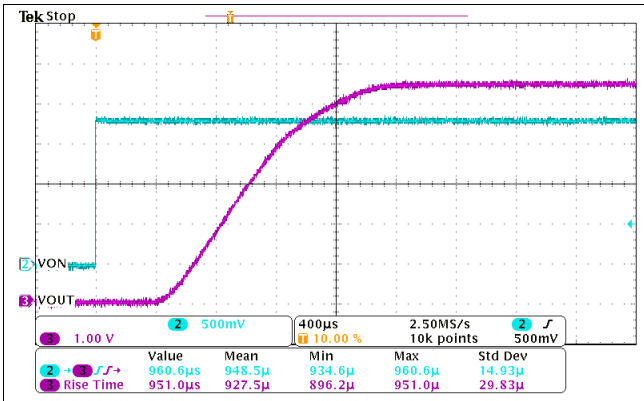

Figure 18. Turn-On Response Time (V_{IN} = 5.5 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

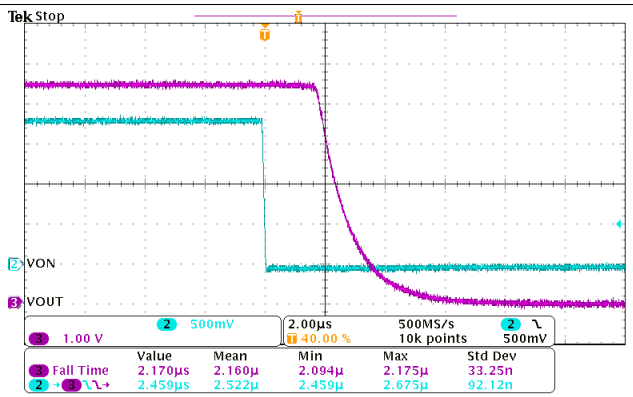

Figure 19. Turn-Off Response Time (V_{IN} = 5.5 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

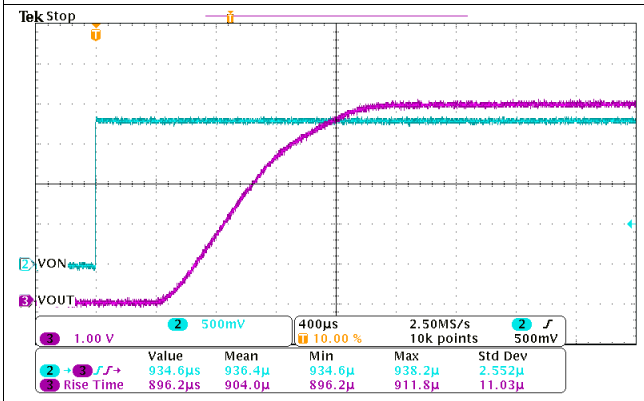

Figure 20. Turn-On Response Time (V_{IN} = 5 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

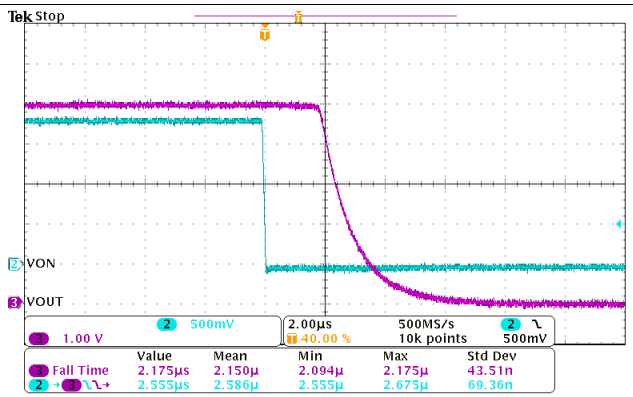

Figure 21. Turn-Off Response Time (V_{IN} = 5 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

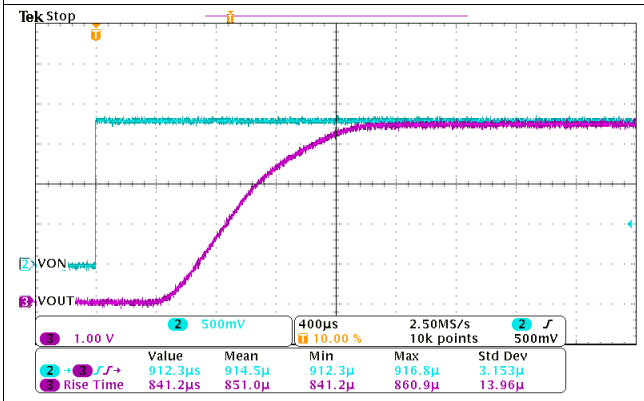

Figure 22. Turn-On Response Time (V_{IN} = 4.5 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

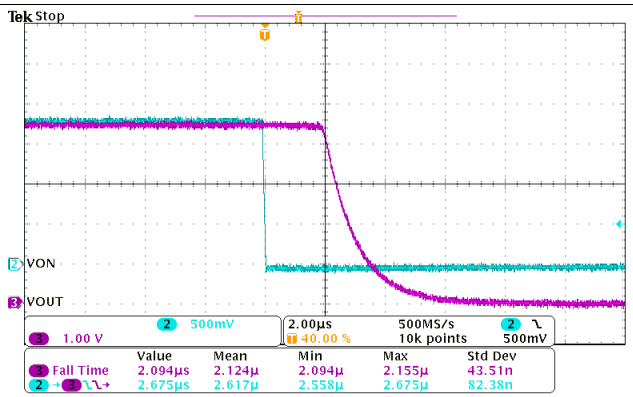

Figure 23. Turn-Off Response Time (V_{IN} = 4.5 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

Copyright © 2013–2015, Texas Instruments Incorporated

Typical AC Scope Captures at T_A = 25ºC (continued)

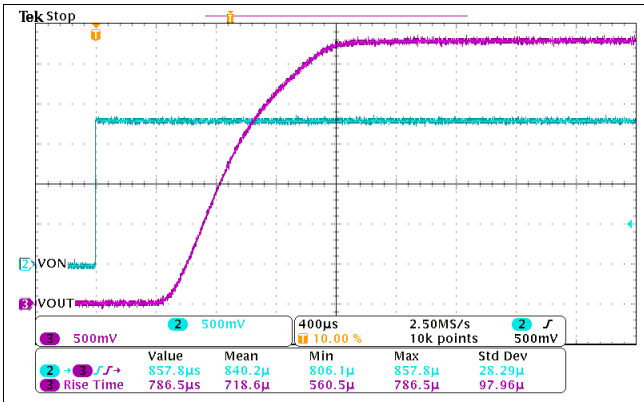

Figure 24. Turn-On Response Time (V_{IN} = 3.3 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

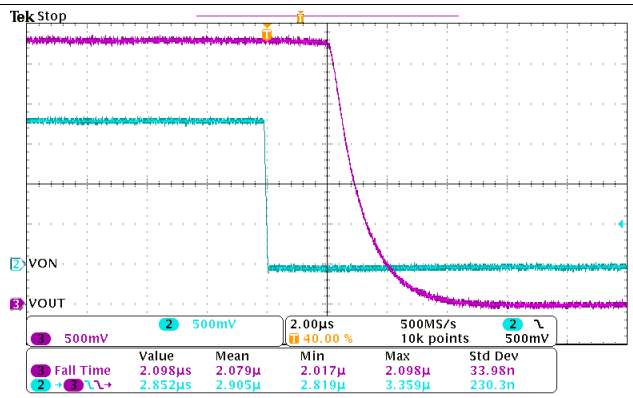

Figure 25. Turn-Off Response Time (V_{IN} = 3.3 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

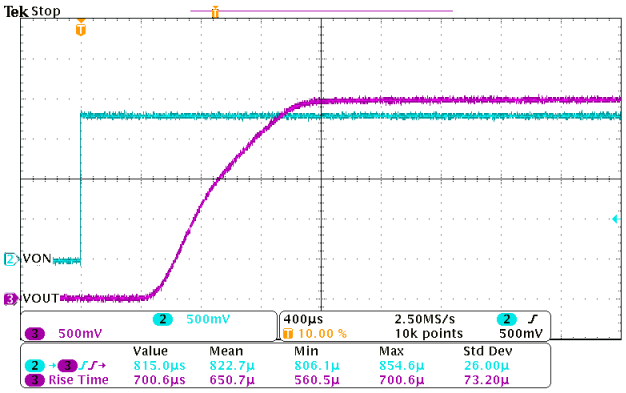

Figure 26. Turn-On Response Time (V_{IN} = 2.5 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

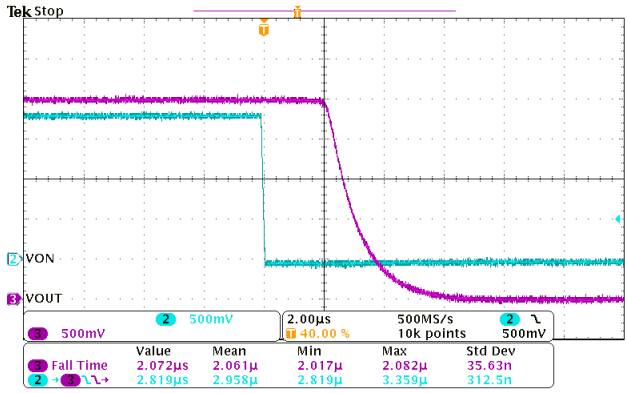

Figure 27. Turn-Off Response Time (V_{IN} = 2.5 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

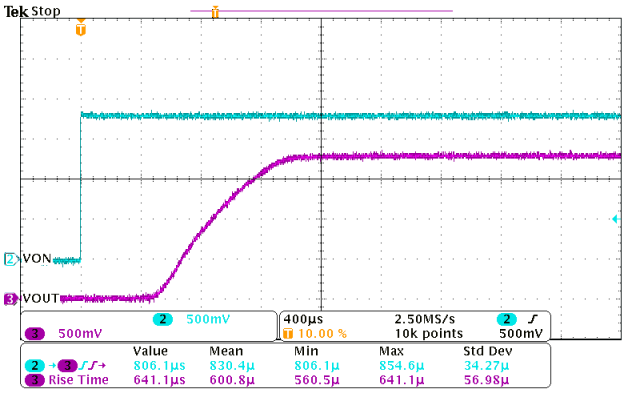

Figure 28. Turn-On Response Time (V_{IN} = 1.8 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

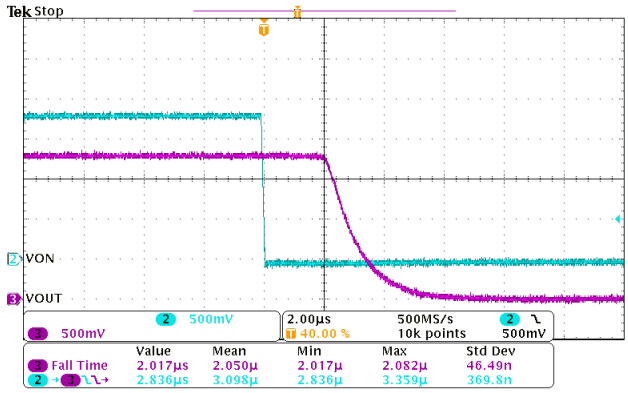

Figure 29. Turn-Off Response Time (V_{IN} = 1.8 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

Copyright © 2013–2015, Texas Instruments Incorporated

Typical AC Scope Captures at T_A = 25ºC (continued)

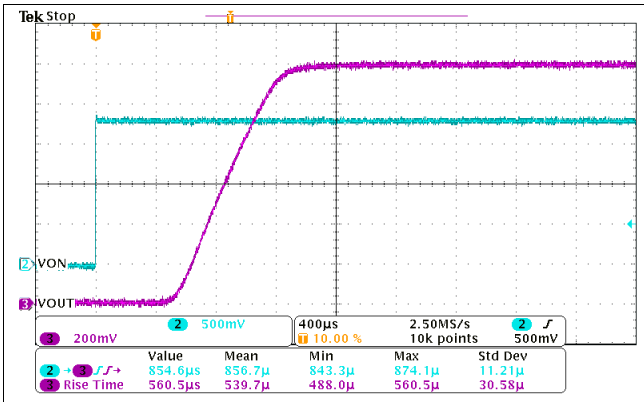

Figure 30. Turn-On Response Time (V_{IN} = 1.2 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

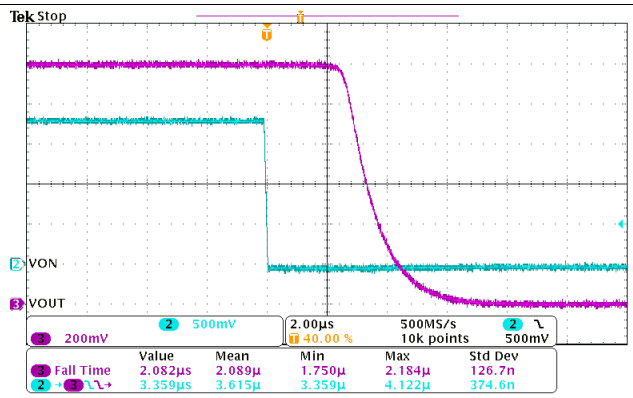

Figure 31. Turn-Off Response Time (V_{IN} = 1.2 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

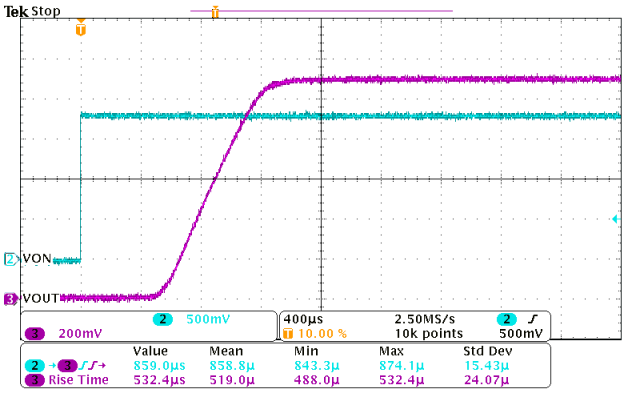

Figure 32. Turn-On Response Time (V_{IN} = 1.1 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

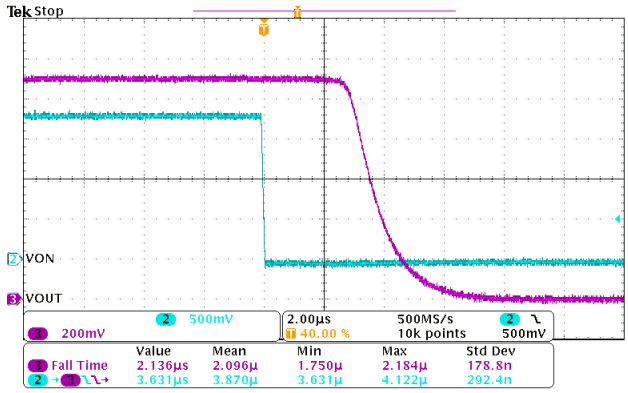

Figure 33. Turn-Off Response Time (V_{IN} = 1.1 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

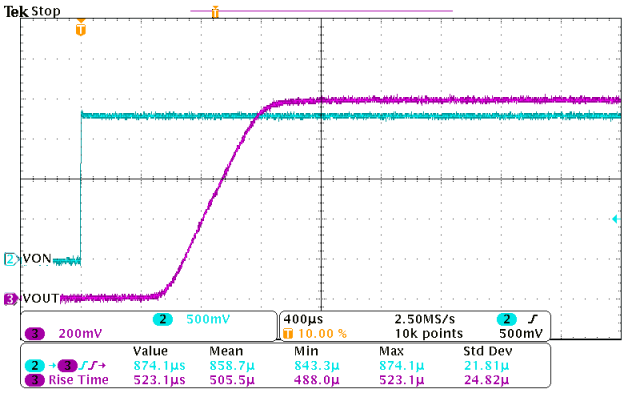

Figure 34. Turn-On Response Time (V_{IN} = 1 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

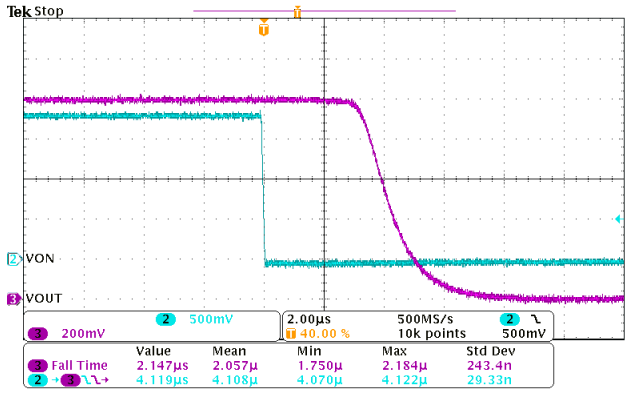

Figure 35. Turn-Off Response Time (V_{IN} = 1 V, C_{IN} = 1 µF, C_{OUT} = 0.1 µF, R_{OUT} = 10 Ω)

Copyright © 2013–2015, Texas Instruments Incorporated

9 Parametric Measurement Information

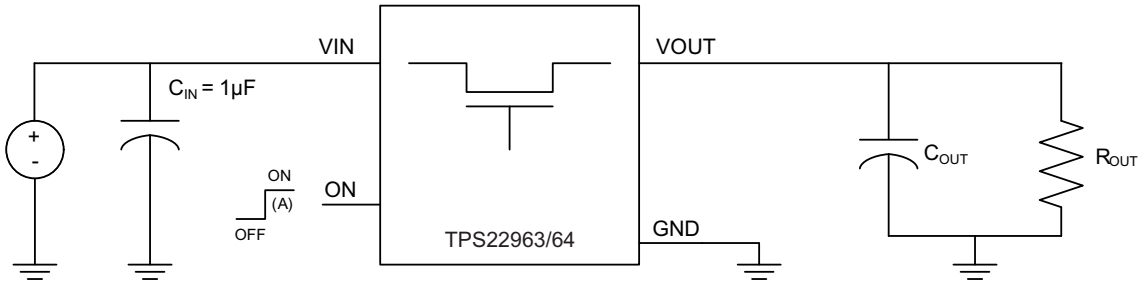

Figure 36. Test Circuit

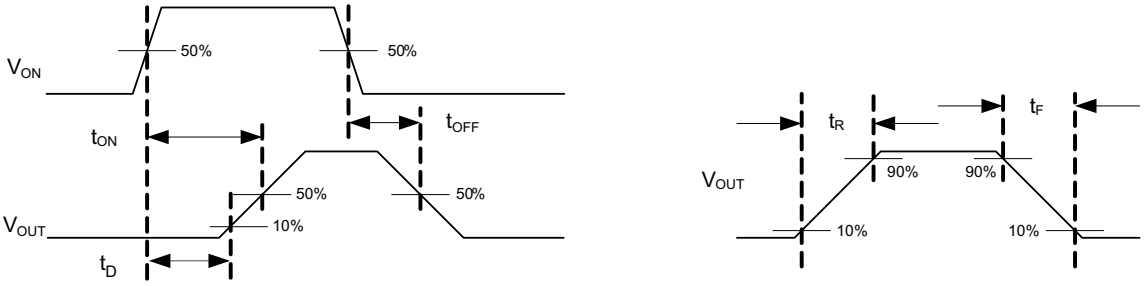

A. Rise and fall times of the control signal are 100 ns.

Figure 37. Timing Waveforms

10 Detailed Description

10.1 Overview

The TPS22963/64 is a single channel, 3-A load switch in a small, space saving CSP-6 package. These devices implement an N-channel MOSFET to provide an ultra-low On-resistance for a low voltage drop across the device. A controlled rise time is used in applications to limit the inrush current.

10.2 Functional Block Diagram

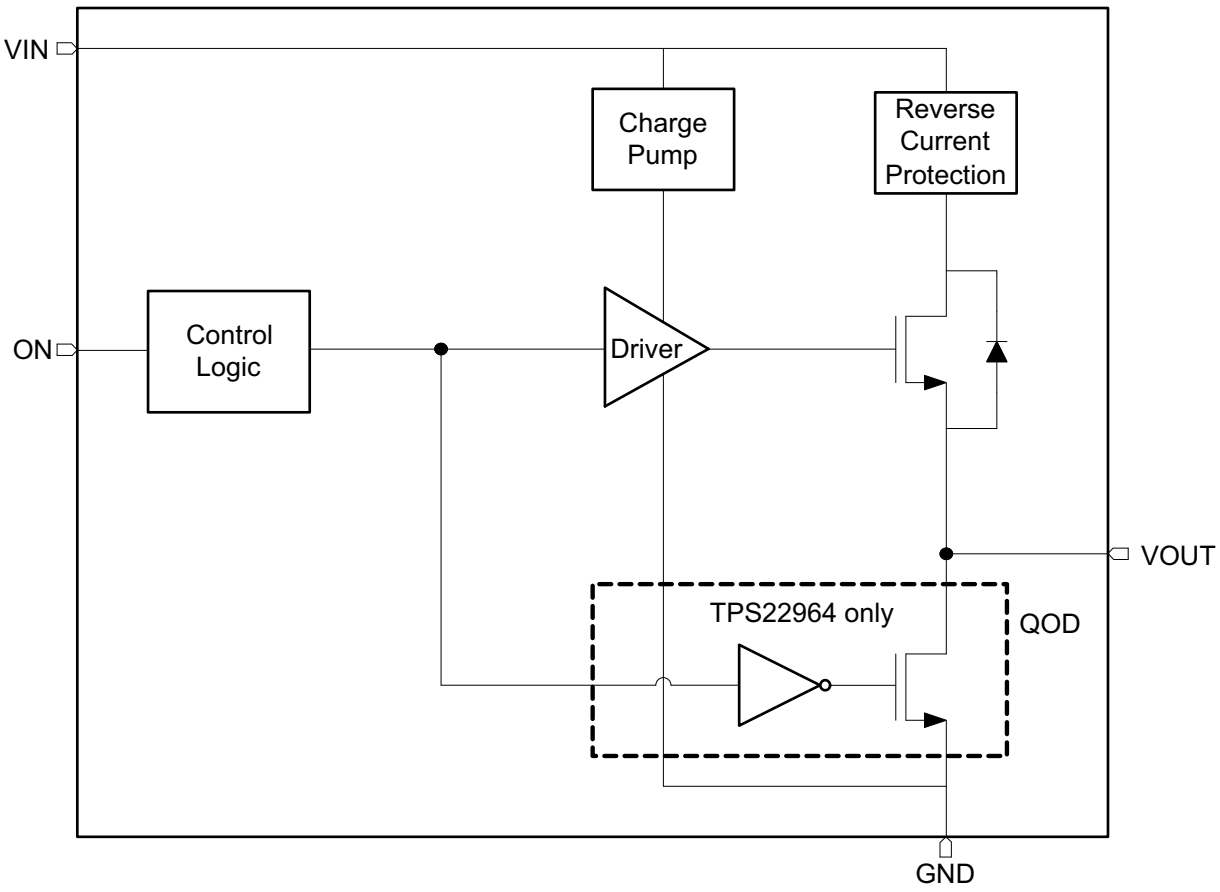

Copyright © 2013–2015, Texas Instruments Incorporated

10.3 Feature Description

10.3.1 On/Off Control

The ON pin controls the state of the switch. It is an active “High” pin and has a low threshold making it capable of interfacing with low voltage GPIO control signals. It can be used with any microcontroller with 1.2 V, 1.8 V, 2.5 V, 3.3 V or 5.5 V GPIOs. Applying V_{IH} on the ON pin will put the switch in the ON-state and V_{IL} will put the switch in the OFF-state.

10.3.2 Quick Output Discharge

The TPS22964 includes the Quick Output Discharge (QOD) feature. When the switch is disabled, a discharge resistance with a typical value of 273Ω is connected between the output and ground. This resistance pulls down the output and prevents it from floating when the device is disabled.

10.4 Device Functional Modes

Table 1. Function Table

ON	VIN to VOUT	OUTPUT DISCHARGE(1) (2)
L	OFF	ACTIVE
H	ON	DISABLED

(1) This feature discharges the output of the switch to ground through a 273 Ω resistor, preventing the output from floating.
(2) This feature is in the TPS22964 device only (not in the TPS22963).

11 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI’s customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

11.1 Application Information

11.1.1 Input Capacitor

It is recommended to place a capacitor (C_{IN}) between VIN and GND pins of TPS22963/64. This capacitor helps to limit the voltage drop on the input voltage supply when the switch turns ON into a discharged load capacitor. A 1-µF ceramic capacitor that is placed close to the IC pins is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop in high current applications.

11.1.2 Output Capacitor

It is recommended to place a capacitor (C_{OUT}) between VOUT and GND pins of TPS22963/64. This capacitor acts as a low pass filter along with the switch ON-resistance to remove any voltage glitches coming from the input voltage source. It is generally recommended to have C_{IN} greater than C_{OUT} so that once the switch is turned ON, C_{OUT} can charge up to V_{IN} without V_{IN} dropping significantly. A 0.1-µF ceramic capacitor that is placed close to the IC pins is usually sufficient.

Copyright © 2013–2015, Texas Instruments Incorporated

Application Information (continued)

11.1.3 Standby Power Reduction

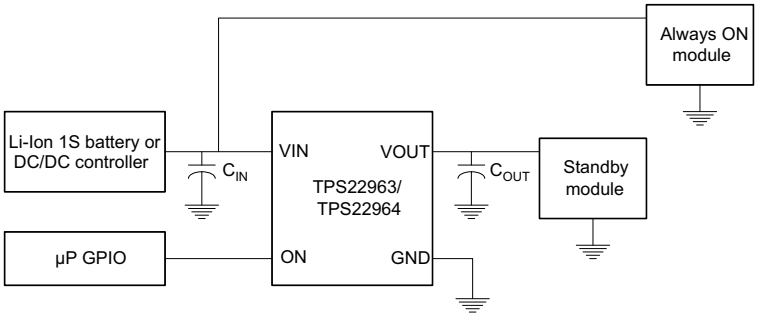

Figure 38. Standby Power Reduction

Any end equipment that is being powered from the battery has a need to reduce current consumption in order to keep the battery charged for a longer time. TPS22963/64 helps to accomplish this by turning off the supply to the modules that are in standby state and hence significantly reduces the leakage current overhead of the standby modules.

11.1.4 Reverse Current Protection

The reverse current protection feature prevents the current to flow from VOUT to VIN when TPS22963/64 is disabled. This feature is particularly useful when the output of TPS22963/64 needs to be driven by another voltage source after TPS22963/64 is disabled (for example in a power multiplexer application). In order for this feature to work, TPS22963/64 has to be disabled and either of the following conditions shall be met: V_{IN} > 1 V or V_{OUT} > 1 V.

Figure 39 demonstrates the ideal behavior of reverse current protection circuit in TPS22963/64. After the device is disabled via the ON pin and VOUT is forced to an external voltage V_{FORCE}, a very small amount of current given by $I_{RC,VIN}$ will flow from VOUT to VIN. This will prevent any extra current loading on the voltage source supplying the V_{FORCE} voltage.

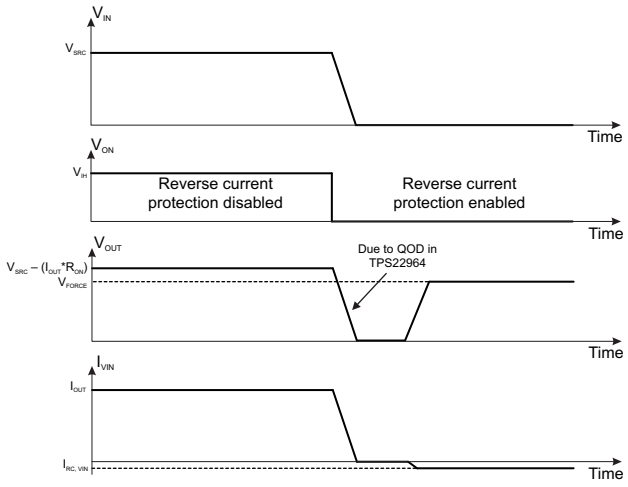

I_{VIN} = Current through VIN pin.

V_{SRC} = Input voltage applied to the device.

V_{FORCE} = External voltage source forced at VOUT pin of the device.

I_{OUT} = Output load current.

Figure 39. Reverse Current Protection

Copyright © 2013–2015, Texas Instruments Incorporated

Application Information (continued)

11.1.5 Power Supply Sequencing Without a GPIO Input

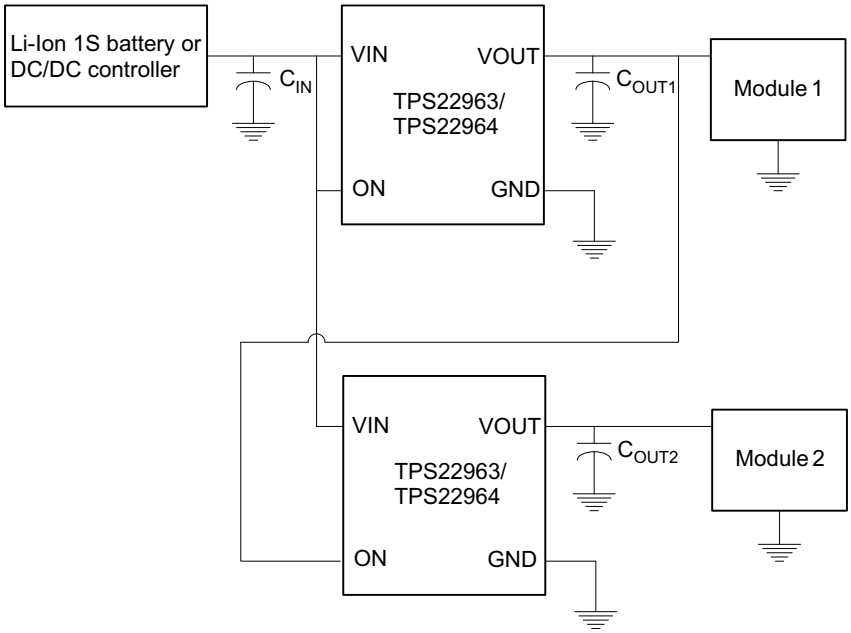

Figure 40. Power Supply Sequencing Without a GPIO Input

In many end equipments, there is a need to power up various modules in a pre-determined manner. TPS22963/64 can solve the problem of power sequencing without adding any complexity to the overall system. Figure 40 shows the configuration required for powering up two modules in a fixed sequence. The output of the first load switch is tied to the enable of the second load switch, so when Module 1 is powered the second load switch is enabled and Module 2 is powered.

11.2 Typical Application

TPS22963/64 is an ultra-low ON-resistance, 3-A integrated load switch that is capable of interfacing directly with 1S battery in portable consumer devices such as smartphones, tablets etc. Its wide input voltage range (1 V to 5.5 V) makes it suitable to be used for lower voltage rails as well inside different end equipments to accomplish power sequencing, inrush current control and reducing leakage current in sub-systems that are in standby mode. Figure 41 shows the typical application circuit of TPS22963/64.

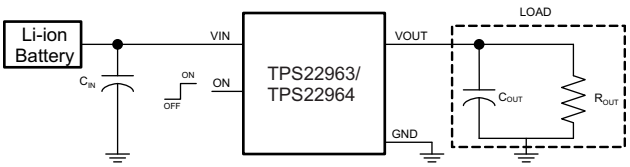

Figure 41. Typical Application Circuit

11.2.1 Design Requirements

DESIGN PARAMETER	EXAMPLE VALUE
V_{IN}	3.3 V
C_L	4.7 µF
Maximum Acceptable Inrush Current	30 mA

11.2.2 Detailed Design Procedure

11.2.2.1 Managing Inrush Current

When the switch is enabled, the output capacitors must be charged up from 0 V to the set value (3.3 V in this example). This charge arrives in the form of inrush current. Inrush current can be calculated using the following equation:

$$I_{INRUSH} = C_L \times \frac{dV_{OUT}}{dt}$$

where

- C = output capacitance
- dV = output voltage
- dt = rise time (1)

The TPS22963/64 offers a controlled rise time for minimizing inrush current. This device can be selected based upon the minimum acceptable rise time which can be calculated using the design requirements and the inrush current equation. An output capacitance of 4.7 µF will be used since the amound of inrush current increases with output capacitance:

30 mA = 4.7 µF x 3.3 V / dt (2)

dt = 517 µs (3)

To ensure an inrush current of less than 30 mA, a device with a rise time greater than 517 µs must be used. The TPS22963/64 has a typical rise time of 715 µs at 3.3 V which meets the above design requirements.

11.2.3 Application Curves

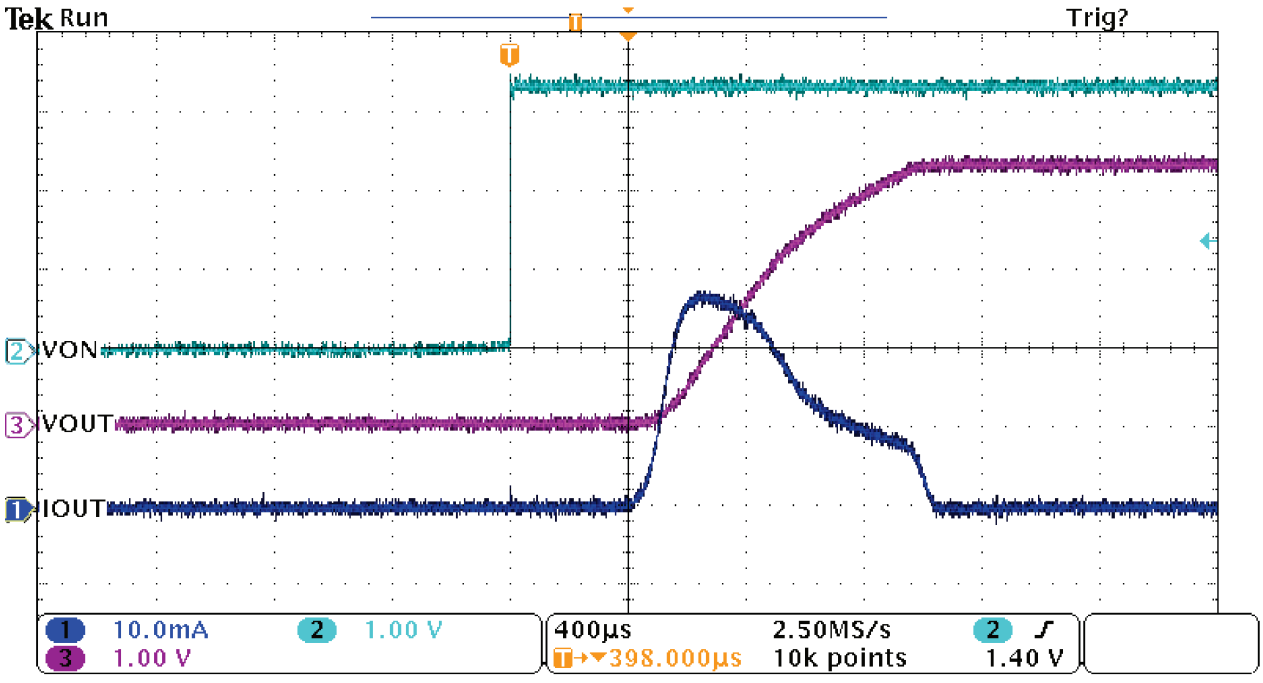

Figure 42. TPS22963/64 Inrush Current with 4.7 µF Output Capacitor

Copyright © 2013–2015, Texas Instruments Incorporated

12 Power Supply Recommendations

The device is designed to operate with a VIN range of 1 V to 5.5 V. This supply must be well regulated and placed as close to the device terminal as possible with the recommended 1 µF bypass capacitor. If the supply is located more than a few inches from the device terminals, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. If additional bulk capacitance is required, an electrolytic, tantalum, or ceramic capacitor of 10 µF may be sufficient

13 Layout

13.1 Layout Guidelines

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal operation. Using wide traces for VIN, VOUT and GND will help minimize the parasitic electrical effects.

For higher reliability, the maximum IC junction temperature, $T_{J(max)}$, should be restricted to 125°C under normal operating conditions. Junction temperature is directly proportional to power dissipation in the device and the two are related by Equation 4.

$$T_J = T_A + \Theta_{JA} \times P_D \quad (4)$$

where

- T_J = Junction temperature of the device
- T_A = Ambient temperature
- P_D = Power dissipation inside the device
- Θ_{JA} = Junction to ambient thermal resistance. See Thermal Information section of the datasheet. This parameter is highly dependent on board layout.

13.2 Layout Example

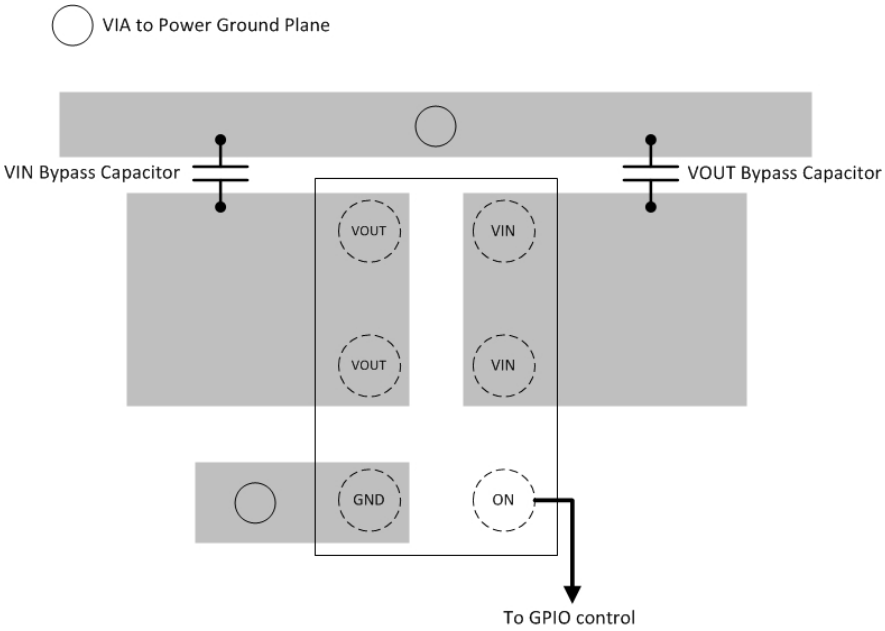

Figure 43. Layout Example

14 Device and Documentation Support

14.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 2. Related Links

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
TPS22963C	Click here	Click here	Click here	Click here	Click here
TPS22964C	Click here	Click here	Click here	Click here	Click here

14.2 Trademarks

Ultrabook is a trademark of Intel Corporation in the U.S. and/or other countries.
All other trademarks are the property of their respective owners.

14.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

14.4 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

15 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2013–2015, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS22963CYZPR	ACTIVE	DSBGA	YZP	6	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	BD	Samples
TPS22963CYZPT	ACTIVE	DSBGA	YZP	6	250	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	BD	Samples
TPS22964CYZPR	ACTIVE	DSBGA	YZP	6	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	DK	Samples
TPS22964CYZPT	ACTIVE	DSBGA	YZP	6	250	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	DK	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

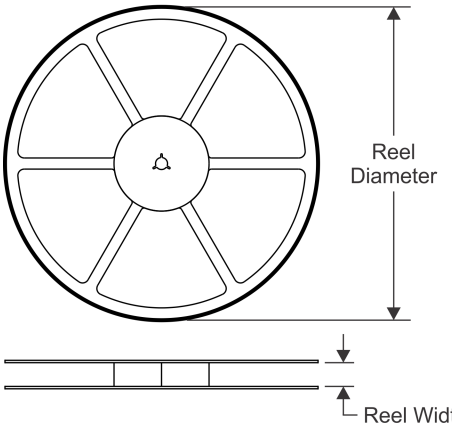

TAPE DIMENSIONS

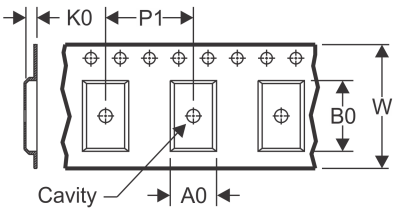

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

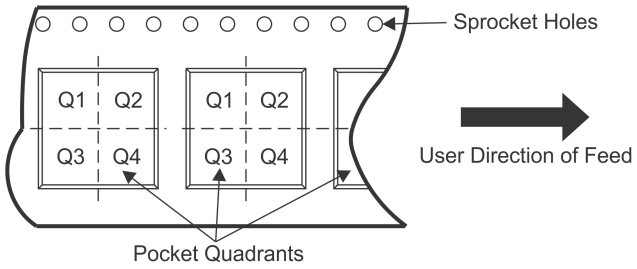

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22963CYZPR	DSBGA	YZP	6	3000	180.0	8.4	1.04	1.54	0.56	4.0	8.0	Q1
TPS22963CYZPT	DSBGA	YZP	6	250	180.0	8.4	1.04	1.54	0.56	4.0	8.0	Q1
TPS22964CYZPR	DSBGA	YZP	6	3000	180.0	8.4	1.04	1.54	0.56	4.0	8.0	Q1
TPS22964CYZPT	DSBGA	YZP	6	250	180.0	8.4	1.04	1.54	0.56	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS

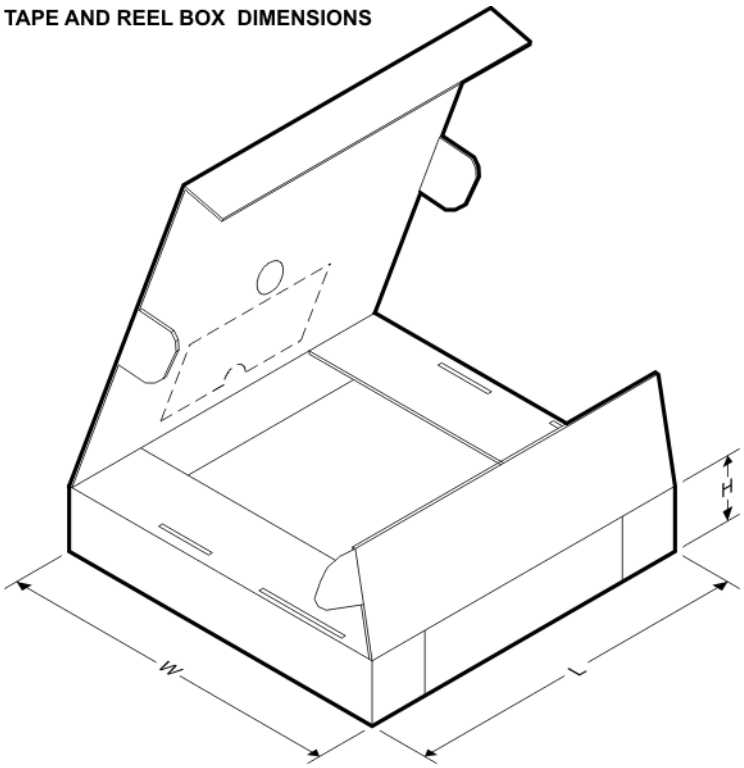

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22963CYZPR	DSBGA	YZP	6	3000	182.0	182.0	20.0
TPS22963CYZPT	DSBGA	YZP	6	250	182.0	182.0	20.0
TPS22964CYZPR	DSBGA	YZP	6	3000	182.0	182.0	20.0
TPS22964CYZPT	DSBGA	YZP	6	250	182.0	182.0	20.0

PACKAGE OUTLINE

YZP0006

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

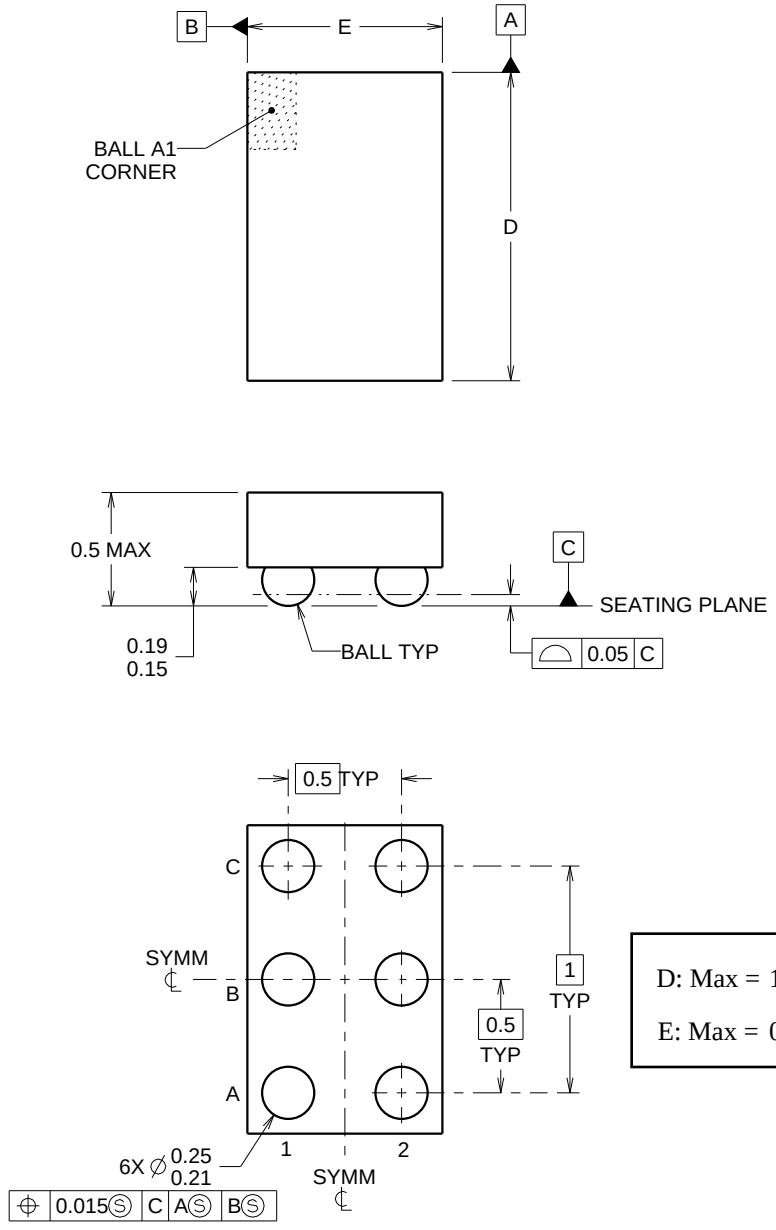

D: Max = 1.472 mm, Min =1.412 mm

E: Max = 0.972 mm, Min =0.912 mm

4219524/A 06/2014

NOTES:

NanoFree Is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. NanoFree™ package configuration.

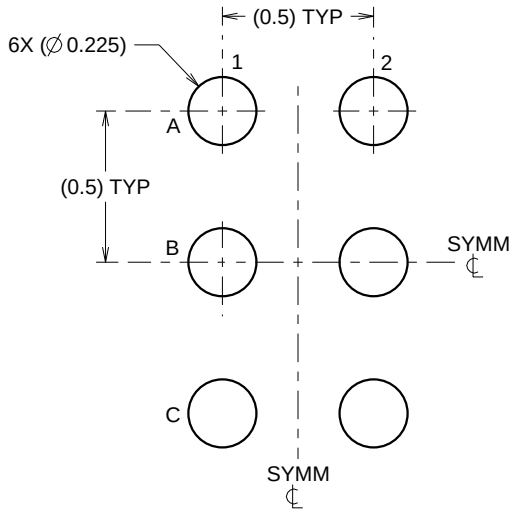

LAND PATTERN EXAMPLE
SCALE:40X

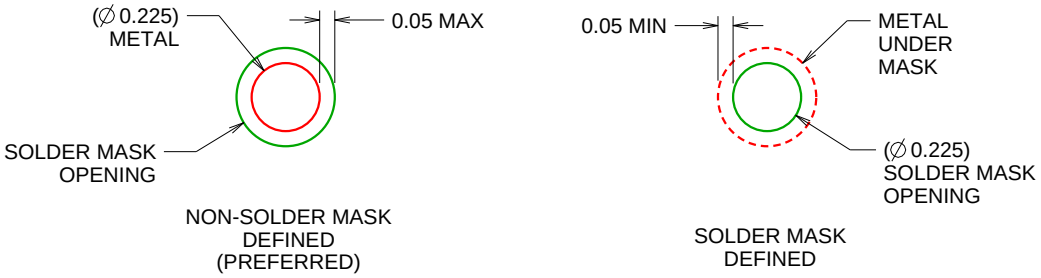

SOLDER MASK DETAILS
NOT TO SCALE

4219524/A 06/2014

NOTES: (continued)

4. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SBVA017 (www.ti.com/lit/sbva017).

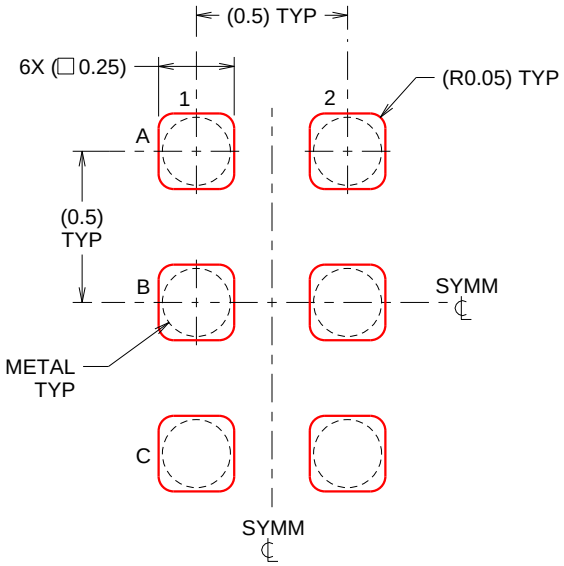

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL
SCALE:40X

4219524/A 06/2014

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (http://www.ti.com/sc/docs/stdterms.htm) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2017, Texas Instruments Incorporated