VM149E

Version : **A.004**
Issue Date : **2015-05-08**
File Name : **SP-VM149E-A.004.doc**
Total Page : **13**

120mA, 10Bit Current Sinking VCM Driver with I^2C Interface

新竹市科學園區展業一路 9 號 7 樓之 1
SILICON TOUCH TECHNOLOGY INC.
9-7F-1, Prosperity Road I, Science Based Industrial Park,
Hsin-Chu, Taiwan 300, R.O.C.
Tel：886-3-5645656 Fax：886-3-5645626

120mA, 10-Bit Current Sinking VCM Driver with I^2C Interface

General Specifications

The VM149E is a VCM (Voice Coil Motor) driver IC with I^2C interface control that is capable of programmable sinking output current. It has a built-in internal voltage reference and operates with a supply voltage range from 2.3V to 3.6V. The DAC is controlled by a signal transmit through a 2-wire I^2C serial interface which operates in an I^2C fast mode (400 kHz). The VM149E is designed for applications such as image stabilization, autofocus in camera phones, and other portable devices.

Features and Benefits

- Programmable sinking output current
- I^2C serial interface
- DAC with 10-bit resolution
- 2.3V ~ 3.6V power source
- Selective Output Slew Rate Control (SRC)
- Low voltage control for digital pin PS, SDA, and SCL
- Power saving mode
- Automatic power on reset

Ordering Information

Part Number	Package
VM149E (WLCSP0813)	WLCSP, 6Pin
VM149E(WLCSP0610)	WLCSP, 6Pin

未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

Terminology

Resolution

The DAC resolution is defined by the power factor of 2, which defines the number of distinct digitized levels.

N-bit resolution -> 2^N distinct digitized levels


Differential Nonlinearity (DNL) error

The variation in digitized step value away from 1 LSB by any two adjacent digitized levels, gain and offset errors removed.

未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

Pin Assignment

TOP View

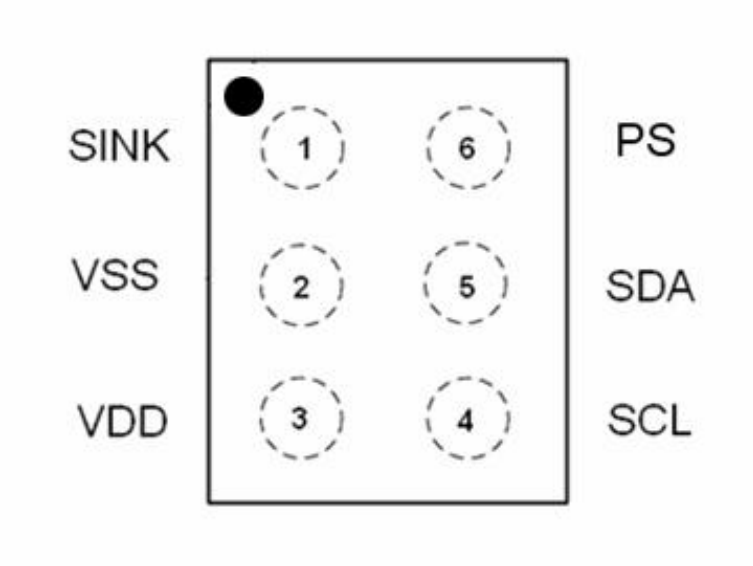

Pin Number	Pin Name	Description
1	SINK	Analog Output : Current Sink Pin
2	VSS	Ground Pin
3	VDD	Power Input Pin
4	SCL	I^2C Interface Clock Line (Serial Clock Line)
5	SDA	I^2C Interface Data Line (Serial Data Line)
6	PS	Digital Input: Power Saving Control (When PS=Low, chip is disabled) (When PS=High, chip is enabled)

Absolute Maximum Ratings

Unless otherwise noted, T_A= 25℃

Characteristic	Symbol	Rating	Unit
Supply Voltage	V_{DD}	-0.4 ~ 3.6	V
Input Signal Voltage	V_{IN}	-0.4 ~ V_{DD}+0.4	V
Maximum Sink Current	I_{SINK}	130	mA
Operating Temperature	T_{OPR}	-40 ~ 85	°C
Storage Temperature	T_{STG}	-55 ~ 150	°C

未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

Electrical Characteristic

Unless otherwise noted, T_A= 25℃, V_{DD} = 2.8 V and VCM ≈ 32Ω, 460uH.

Item	Sym.	Condition	Limit			Unit
			Min.	Typ.	Max.	
Power Supply						
Supply Voltage	V_{DD}	-	2.3	2.8	3.6	V
Supply Current (I_{DD})	I_{PS}	PS = Low (chip is disabled)	-		< 1	uA
	I_{DD0}	PS = High, SPS(*1)= High	-		< 1	uA
	I_{DD1}	PS = High, SPS(*1)= Low	-	1.8	2.3	mA
PS, SDA, SCL digital pin						
Input Voltage High	V_{IH}	-	1.26	-	V_{DD}+0.4	V
Input Voltage Low	V_{IL}	-	-0.4	-	0.54	V
Input Current High	I_{IH}	-			±1	uA
Input Current Low	I_{IL}	-			±1	uA
Parameters						
DAC Resolution		-	-	10	-	Bits
DNL		-	-	+/-0.7	+/-1	LSB
Maximum Output Sink Current	$I_{S,max}$	D[9:0]=3FF(*2)	114	120	126	mA
Zero Code Output Sink Current	$I_{S,min}$	D[9:0]=000(*2)	-	0.1	1	uA
Output Offset Current	I_{OS}	PS = H, SPS(*1)= H	-	0.1	1	uA
Voltage Drop	ΔV	$\Delta V = V_{SINK} - V_{MVSS}$(*3) (@$I_{SINK}$ = 85 mA)	-	0.08		V

Note:


(*1): SPS (Soft Power Saving, 2nd standby mode): IC power saving mode, controlled by software.

(*2): The value of sink current through pin SINK is set by D[9:0] linearly.

(*3): V_{SINK} is the voltage of SINK pin, and V_{MVSS} is the voltage of motor driver VSS pin

未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

Block Diagram

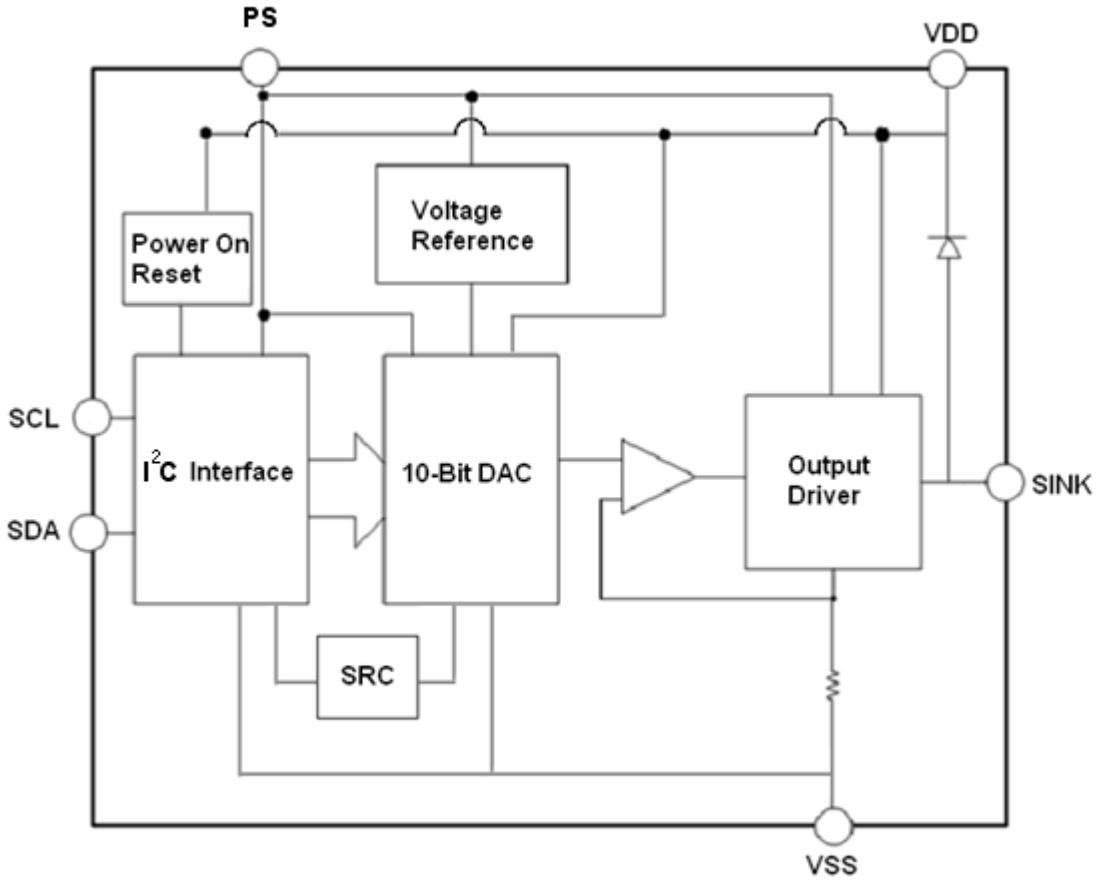


未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

Data Format


VM149E Write Mode

In the writing mode, data is written to the VM149E and shifted into a 16-bit input register. After all 16 bits of data have been shifted in, a STOP signal is generated by master controller. The data in the input register is transferred to the DAC at the same time.

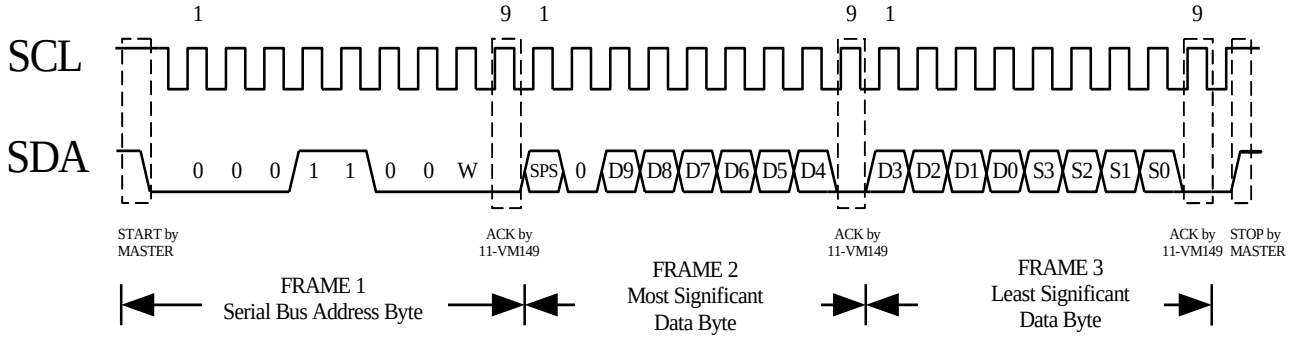

VM149E Read Mode

In reading mode, data is read from IC to a master controller in the same bit order.

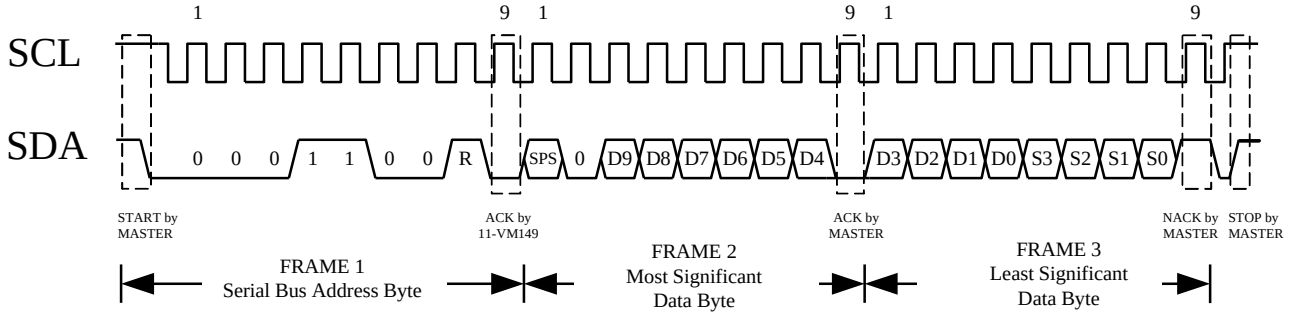

未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

Table

	MSB								LSB							
Serial Data Bits	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0
Input Register	R15	R14	R13	R12	R11	R10	R09	R08	R07	R06	R05	R04	R03	R02	R01	R00
Function	SPS	0	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	S3	S2	S1	S0

- **SPS (Soft Power Saving, 2nd standby mode):** IC power saving, controlled by software.

The operations are defined by the following table.

PS	SPS	IC status
Low	-	Power saving
High	Low	Normal
	High	Soft power saving

If PS is at logic low level; the chip is forced to shut down all power. If PS is at logic high level, the chip will be controlled by the SPS bit(the R15 bit of the register) to perform normally(SPS=Low) or to softly power off the IC(SPS=High). It is recommended to keep PS at low level (PS = L) while the chip is in no operation mode to save power for all applications.

- **D[9:0]:** The level of sink current through pin SINK is set by D[9:0].

未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.


- **S[3:0]:** Output Current Slew Rate Control: The output current slew rate can be set by S[3:2] : as step control and S[1:0] as step period.

  S[3:2] : code step control

S[3:2]	Code per step
0	0 (no SRC)
1	1
2	2
3	4


S[1:0] :SRC step period

S[1:0]	Period (us)
0	64
1	128
2	256
3	512

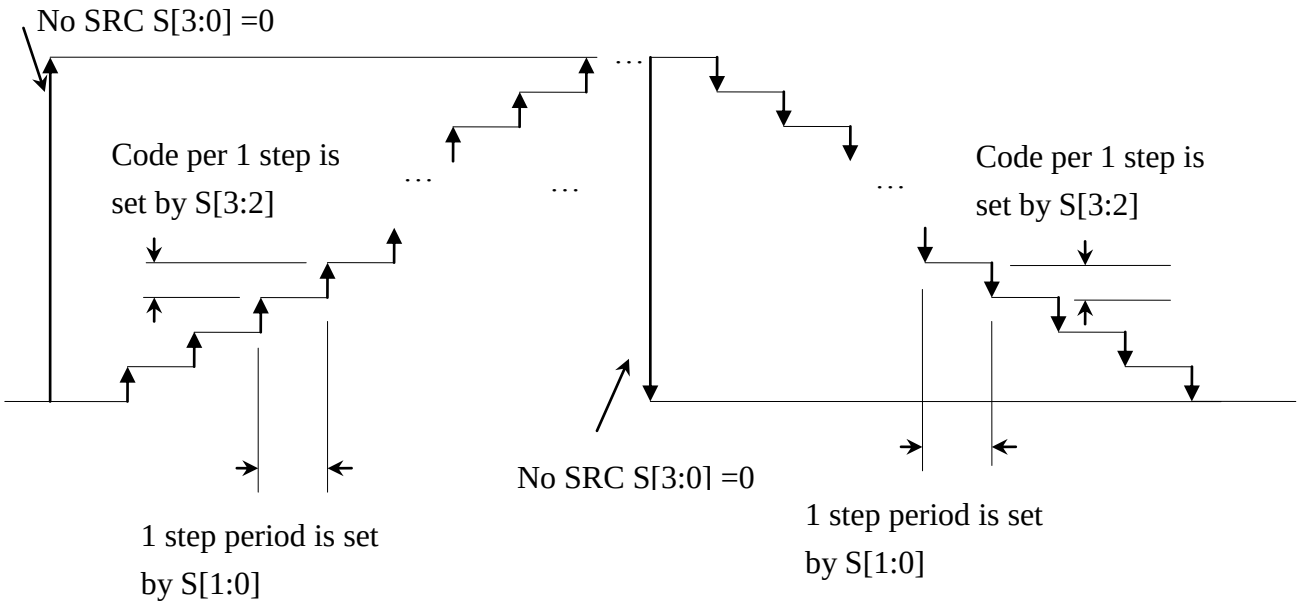

未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

Application Circuit

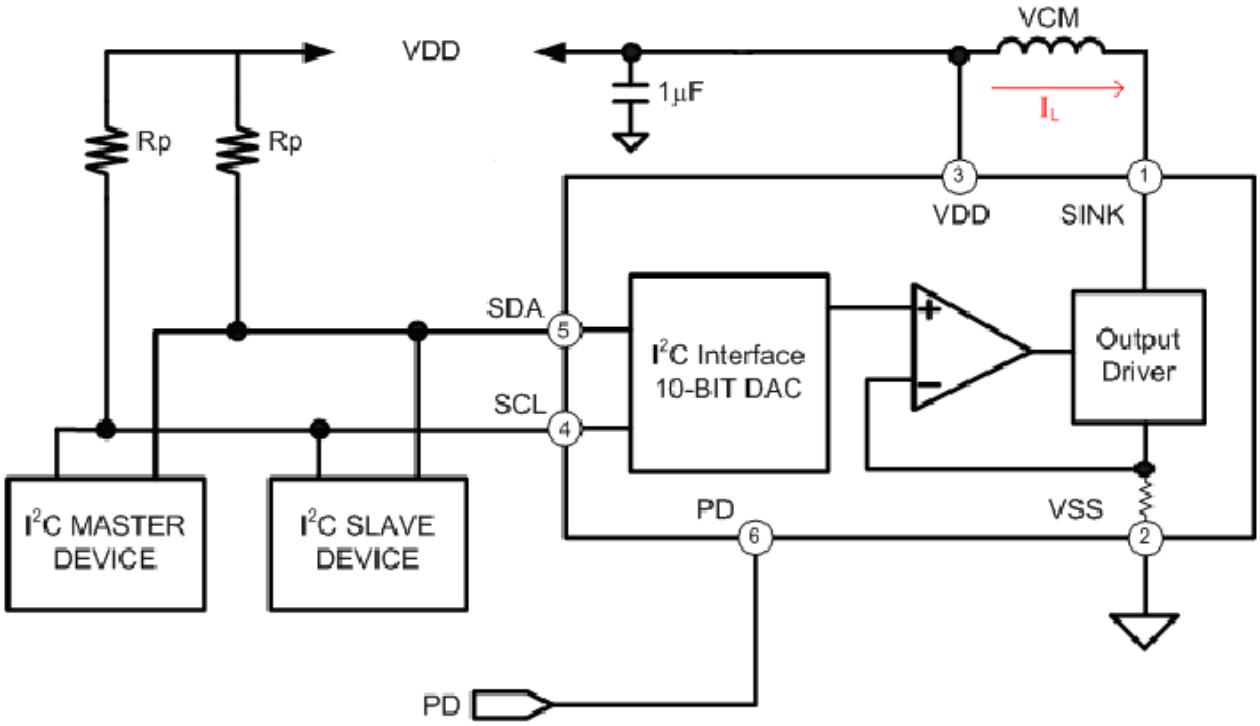


Application Notes

- The VM149E is a constant current driving IC for applications in Auto-Focus. The supply voltage range VDD of VM149E is from 2.3V to 3.6V. The input range of digital control pin PS, and digital I/O pins SCL and SDA, are defined such that logic “High” is from 1.26V to VDD+0.4V and logic “Low” is from –0.4V to 0.54V. Therefore, the three digital pins are suitable controlled by 1.8V ISP.


未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

Package Specifications (WLCSP0813): (0.805mm*1.295mm*0.35mm)

TOP View

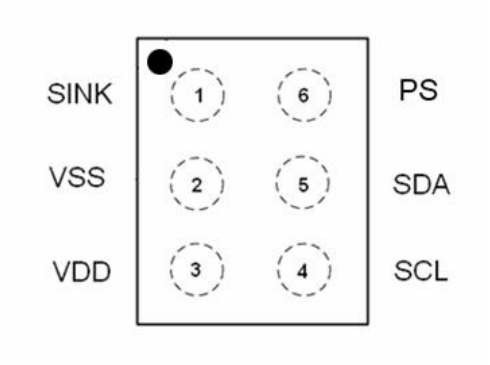

Bottom View

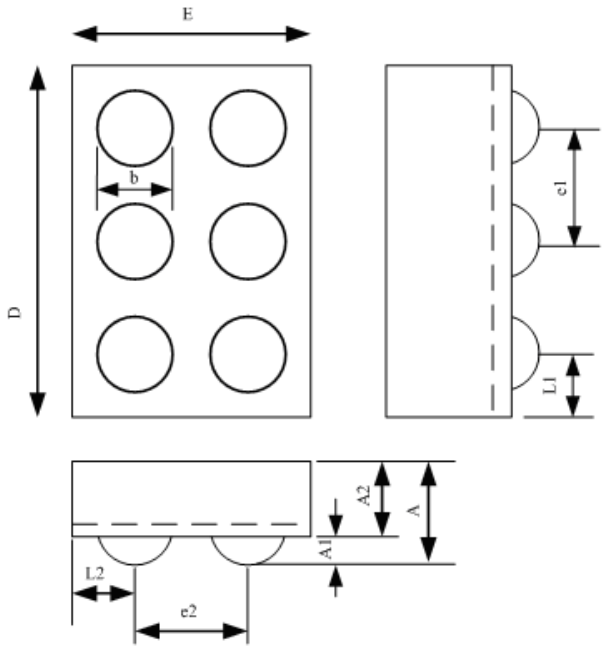


SYMBOL	DIMENSION (mm)		
	MIN.	NOM.	MAX.
A	0.310	0.350	0.390
A1	0.085	0.100	0.115
A2	0.225	0.250	0.275
b	0.200	0.245	0.290
D	1.260	1.295	1.330
E	0.770	0.805	0.840
e1	0.380	0.400	0.420
e2	0.380	0.400	0.420
L1	0.180	0.245	0.300
L2	0.145	0.200	0.255


未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

Package Specifications (WLCSP0610): (0.605mm*1.005mm*0.29mm)

TOP View

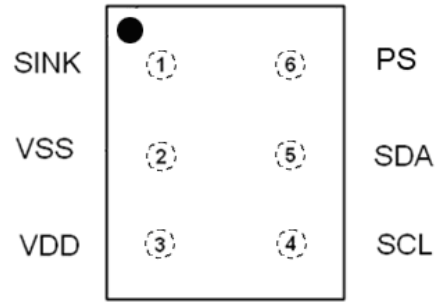

Bottom View

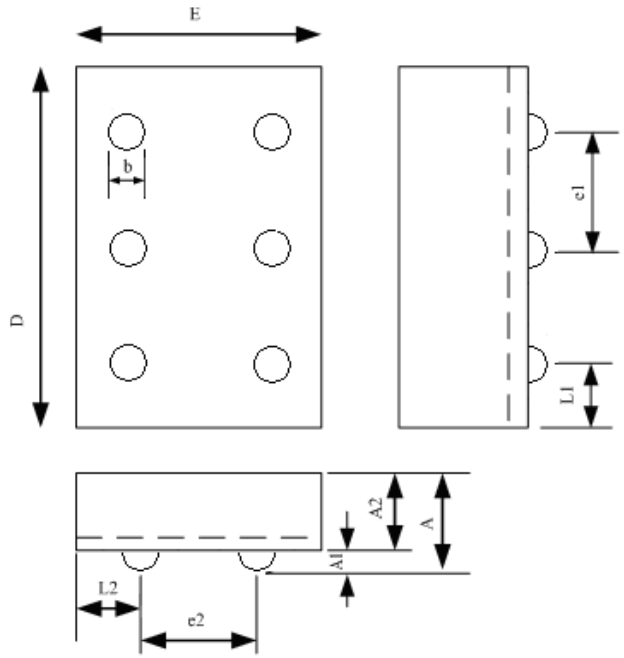

SYMBOL	DIMENSION (mm)		
	MIN.	NOM.	MAX.
A	0.255	0.290	0.325
A1	0.030	0.040	0.050
A2	0.225	0.250	0.275
b	0.067	0.082	0.097
D	0.970	1.005	1.040
E	0.570	0.605	0.640
e1	0.380	0.400	0.420
e2	0.380	0.400	0.420
L1	0.060	0.115	0.170
L2	0.060	0.115	0.170

未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.

The products listed herein are designed for ordinary electronic applications, such as electrical appliances, audio-visual equipment, communications devices and so on. Hence, it is advisable that the devices should not be used in medical instruments, surgical implants, aerospace machinery, nuclear power control systems, disaster/crime-prevention equipment and the like. Misusing those products may directly or indirectly endanger human life, or cause injury and property loss.

Silicon Touch Technology, Inc. will not take any responsibilities regarding the misusage of the products mentioned above. Anyone who purchases any products described herein with the above-mentioned intention or with such misused applications should accept full responsibility and indemnify. Silicon Touch Technology, Inc. and its distributors and all their officers and employees shall defend jointly and severally against any and all claims and litigation and all damages, cost and expenses associated with such intention and manipulation.

Silicon Touch Technology, Inc. reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.

未經授權而逕予重製、複製、使用或公開本文件，行爲人得被追究侵權之相關民刑事責任
Unauthorized reproduction, duplication, use or disclosure of this document will be deemed as infringement.