VNQ810M-E

QUAD CHANNEL HIGH SIDE DRIVER


Table 1. General Features

Type	$R_{DS(on)}$	I_{out}	V_{CC}
VNQ810M-E	150mΩ (*)	0.6A (*)	36V

(*) Per each channel

- CMOS COMPATIBLE INPUTS
- OPEN DRAIN STATUS OUTPUTS
- ON STATE OPEN LOAD DETECTION
- OFF STATE OPEN LOAD DETECTION
- SHORTED LOAD PROTECTION
- UNDERVOLTAGE AND OVERVOLTAGE SHUTDOWN
- PROTECTION AGAINST LOSS OF GROUND
- VERY LOW STAND-BY CURRENT
- REVERSE BATTERY PROTECTION (**)
- IN COMPLIANCE WITH THE 2002/95/EC EUROPEAN DIRECTIVE

Figure 1. Package



SO-28 (DOUBLE ISLAND)

Obsolete Product(s) - Obsolete Product(s)

DESCRIPTION

The VNQ810M-E is a quad HSD formed by assembling two VND810M-E chips in the same SO-28 package. The VNQ810M-E is a monolithic device made by using STMicroelectronics VIPower M0-3 Technology, intended for driving any kind of load with one side connected to ground. Active V_{CC} pin voltage clamp protects the device against low energy spikes (see ISO7637 transient compatibility table).


Active current limitation combined with thermal shutdown and automatic restart protects the device against overload. The current limitation threshold is aimed at detecting the 21W/12V standard bulb as an overload fault. The device detects open load condition both in on and off state . Output shorted to V_{CC} is detected in the off state. Device automatically turns off in case of ground pin disconnection.

Table 2. Order Codes

Package	Tube	Tape and Reel
SO-28	VNQ810M-E	VNQ810MTR-E

Note: (**) See application schematic at page 10

Figure 2. Block Diagram

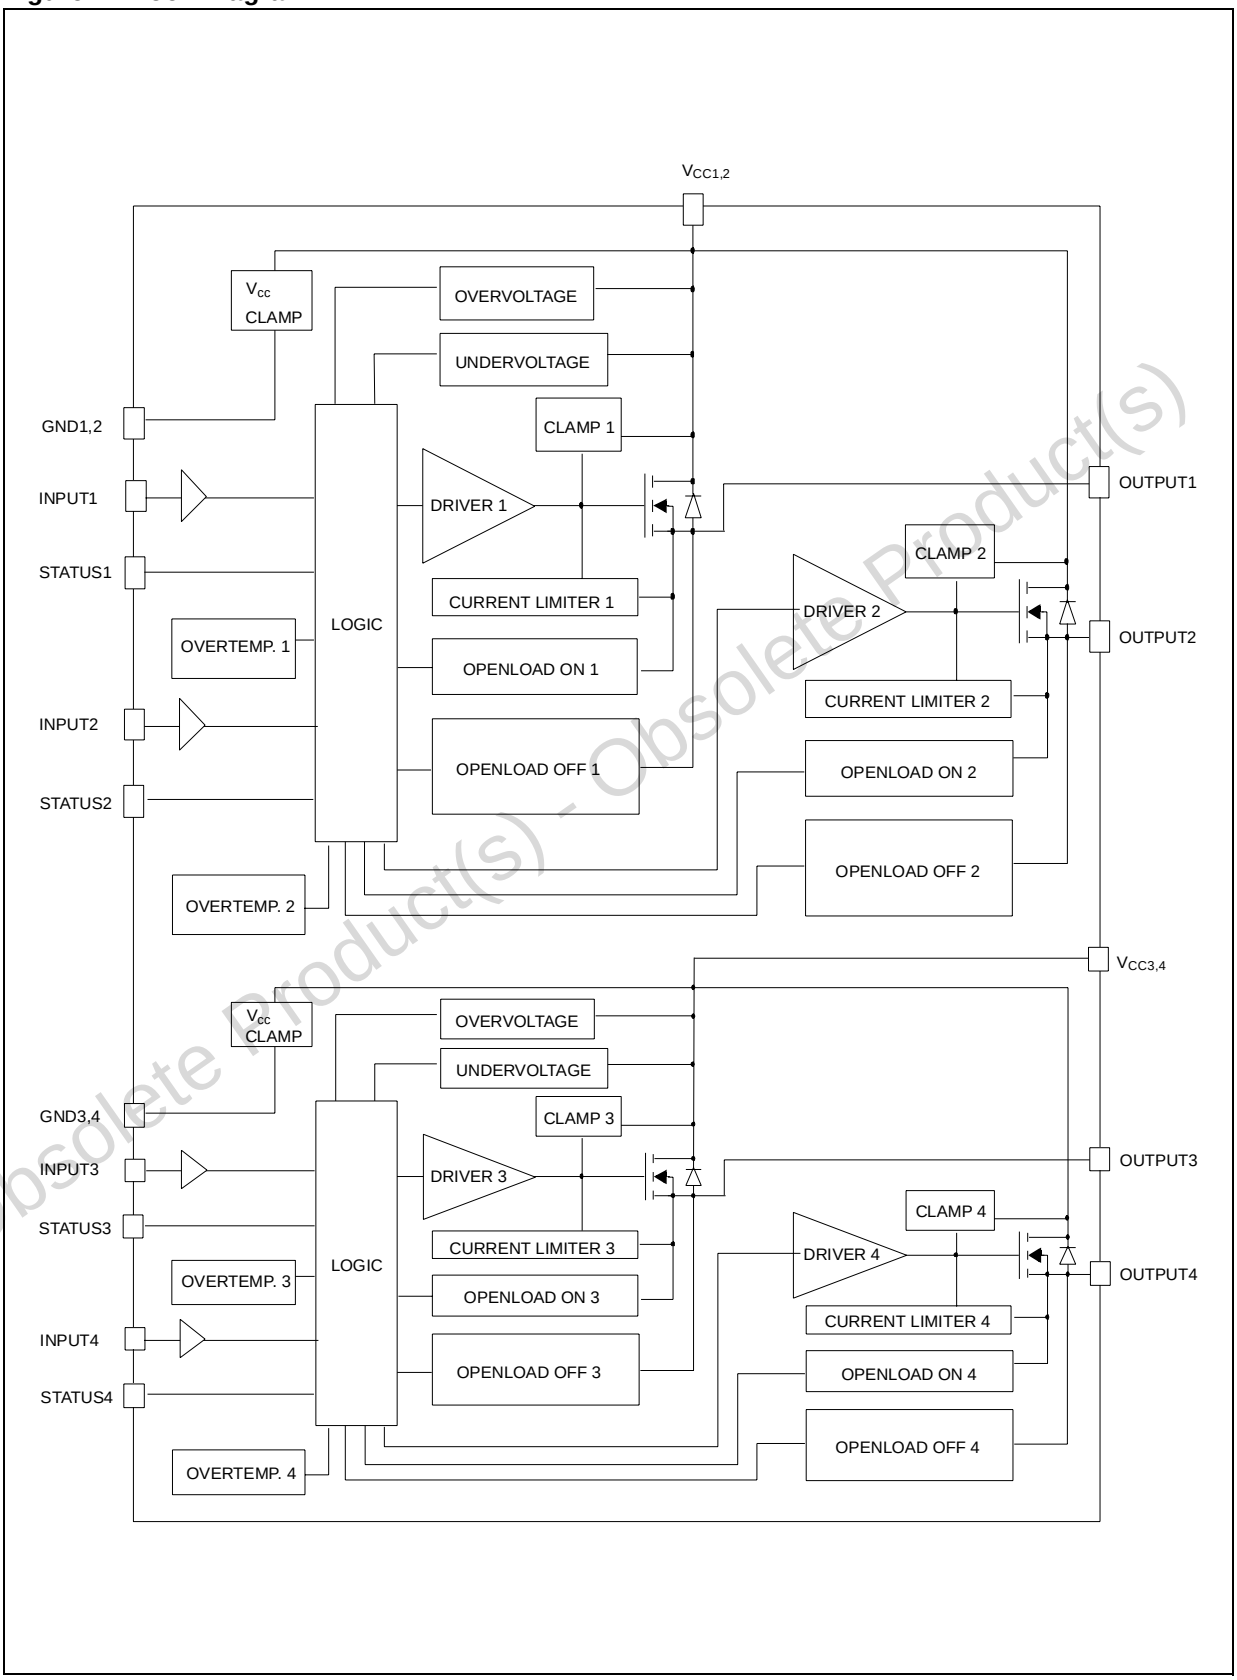


Obsolete Product(s) - Obsolete Product(s)

Table 3. Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
V_{CC}	DC Supply Voltage	41	V
- V_{CC}	Reverse DC Supply Voltage	-0.3	V
- I_{gnd}	DC Reverse Ground Pin Current	-200	mA
I_{OUT}	DC Output Current	Internally Limited	A
- I_{OUT}	Reverse DC Output Current	-6	A
I_{IN}	DC Input Current	+/- 10	mA
I_{STAT}	DC Status Current	+/- 10	mA
V_{ESD}	Electrostatic Discharge (Human Body Model: R=1.5KΩ; C=100pF) - INPUT - STATUS - OUTPUT - V_{CC}	 4000 4000 5000 5000	 V V V V
E_{MAX}	Maximum Switching Energy (L=310mH; R_L=0Ω; V_{bat}=13.5V; T_{jstart}=150ºC; I_L=0.9A)	174	mJ
P_{tot}	Power dissipation (per island) at T_{lead}=25°C	6.25	W
T_j	Junction Operating Temperature	Internally Limited	°C
T_{stg}	Storage Temperature	-55 to 150	°C


Figure 3. Configuration Diagram (Top View) & Suggested Connections for Unused and N.C. Pins

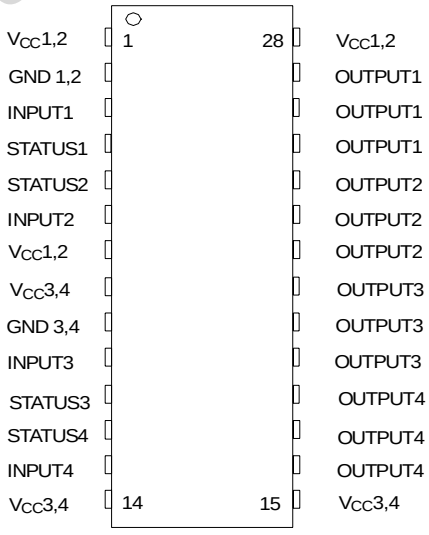

Connection / Pin	Status	N.C.	Output	Input
Floating	X	X	X	X
To Ground		X		Through 10KΩ resistor

Obsolete Product(s) - Obsolete Product(s)

Figure 4. Current and Voltage Conventions

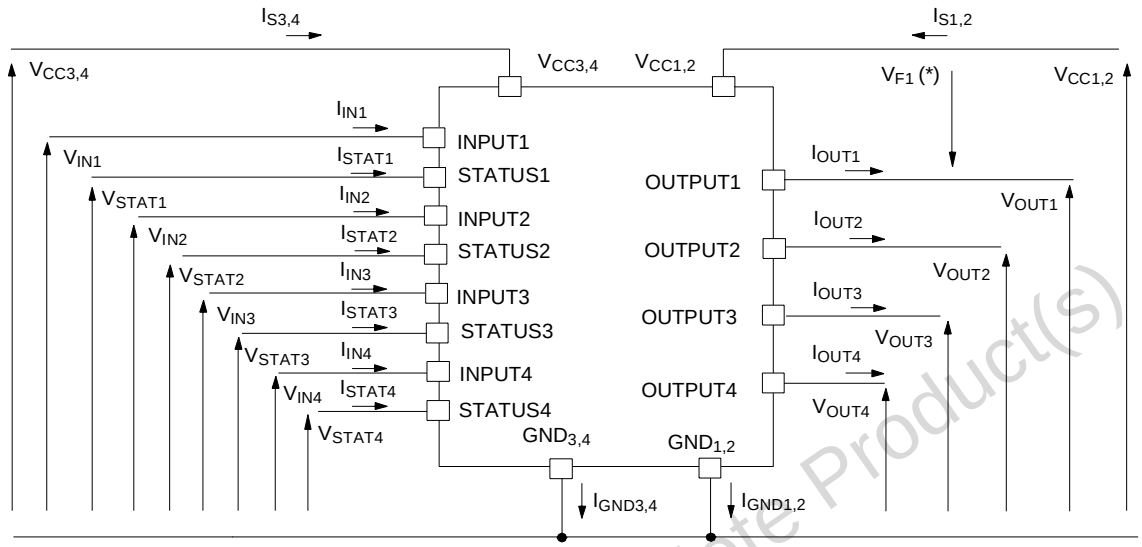

(*) $V_{Fn} = V_{CCn} - V_{OUTn}$ during reverse battery condition

Table 4. Thermal Data (Per island)

Symbol	Parameter	Value		Unit
$R_{thj\text{-}lead}$	Thermal Resistance Junction-lead per chip	20		°C/W
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient (one chip ON)	60 (1)	44 (2)	°C/W
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient (two chips ON)	46 (1)	31 (2)	°C/W

Note: 1. When mounted on a standard single-sided FR-4 board with 0.5cm^2 of Cu (at least 35µm thick) connected to all V_{CC} pins. Horizontal mounting and no artificial air flow

Note: 2. When mounted on a standard single-sided FR-4 board with 6cm^2 of Cu (at least 35µm thick) connected to all V_{CC} pins. Horizontal mounting and no artificial air flow

Obsolete Product(s) - Obsolete Product(s)

ELECTRICAL CHARACTERISTICS

(8V<V_{CC}<36V; -40°C< T_j <150°C, unless otherwise specified)
(Per each channel)

Table 5. Power Output

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_{CC} (**)	Operating Supply Voltage		5.5	13	36	V
V_{USD} (**)	Undervoltage Shut-down		3	4	5.5	V
V_{OV} (**)	Overvoltage Shut-down		36			V
R_{ON}	On State Resistance	I_{OUT}=0.5A; T_j=25°C I_{OUT}=0.5A; V_{CC}> 8V			150 300	mΩ mΩ
I_S (**)	Supply Current	Off State; V_{CC}=13V; V_{IN}=V_{OUT}=0V Off State; V_{CC}=13V; V_{IN}=V_{OUT}=0V; T_j =25°C On State; V_{CC}=13V; V_{IN}=5V; I_{OUT}=0A		12 12 5	40 25 7	µA µA mA
$I_{L(off1)}$	Off State Output Current	V_{IN}=V_{OUT}=0V	0		50	µA
$I_{L(off2)}$	Off State Output Current	V_{IN}=0V; V_{OUT}=3.5V	-75		0	µA
$I_{L(off3)}$	Off State Output Current	V_{IN}=V_{OUT}=0V; V_{CC}=13V; T_j =125°C			5	µA
$I_{L(off4)}$	Off State Output Current	V_{IN}=V_{OUT}=0V; V_{CC}=13V; T_j =25°C			3	µA

Note: (**) Per island

Table 6. Protection (Per each channel) (See note 1)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
T_{TSD}	Shut-down Temperature		150	175	200	°C
T_R	Reset Temperature		135			°C
T_{hyst}	Thermal Hysteresis		7	15		°C
t_{SDL}	Status Delay in Overload Conditions	T_j>T_{TSD}			20	µs
I_{lim}	Current limitation	 5.5V < V_{CC} < 36V	0.7	0.9	1.4 1.4	A A
V_{demag}	Turn-off Output Clamp Voltage	I_{OUT}=0.5A	V_{CC}-41	V_{CC}-48	V_{CC}-55	V

Note: 1. To ensure long term reliability under heavy overload or short circuit conditions, protection and related diagnostic signals must be used together with a proper software strategy. If the device is subjected to abnormal conditions, this software must limit the duration and number of activation cycles

Table 7. V_{CC} - Output Diode

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_F	Forward on Voltage	-I_{OUT}=0.53A; T_j=150°C			0.6	V

Obsolete Product(s) - Obsolete Product(s)

ELECTRICAL CHARACTERISTICS (continued)

Table 8. Status Pin (Per each channel)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_{STAT}	Status Low Output Voltage	I_{STAT}= 1.6 mA			0.5	V
I_{LSTAT}	Status Leakage Current	Normal Operation; V_{STAT}= 5V			10	µA
C_{STAT}	Status Pin Input Capacitance	Normal Operation; V_{STAT}= 5V			100	pF
V_{SCL}	Status Clamp Voltage	I_{STAT}=1mA I_{STAT}=-1mA	6	6.8 -0.7	8	V V

Table 9. Switching (Per each channel) (V_{CC}=13V)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$t_{d(on)}$	Turn-on Delay Time	R_L=26Ω from V_{IN} rising edge to V_{OUT}=1.3V		30		µs
$t_{d(off)}$	Turn-off Delay Time	R_L=26Ω from V_{IN} falling edge to V_{OUT}=11.7V		30		µs
$dV_{OUT}/dt_{(on)}$	Turn-on Voltage Slope	R_L=26Ω from V_{OUT}=1.3V to V_{OUT}=10.4V		See relative diagram		V/µs
$dV_{OUT}/dt_{(off)}$	Turn-off Voltage Slope	R_L=26Ω from V_{OUT}=11.7V to V_{OUT}=1.3V		See relative diagram		V/µs

Table 10. Openload Detection (Per each channel)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
I_{OL}	Openload ON State Detection Threshold	V_{IN}=5V	20	40	80	mA
$t_{DOL(on)}$	Openload ON State Detection Delay	I_{OUT}=0A			200	µs
V_{OL}	Openload OFF State Voltage Detection Threshold	V_{IN}=0V	1.5	2.5	3.5	V
$t_{DOL(off)}$	Openload Detection Delay at Turn Off				1000	µs

Table 11. Logic Input (Per each channel)


Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_{IL}	Input Low Level				1.25	V
I_{IL}	Low Level Input Current	V_{IN} = 1.25V	1			µA
V_{IH}	Input High Level		3.25			V
I_{IH}	High Level Input Current	V_{IN} = 3.25V			10	µA
$V_{I(hyst)}$	Input Hysteresis Voltage		0.5			V
V_{ICL}	Input Clamp Voltage	I_{IN} = 1mA I_{IN} = -1mA	6	6.8 -0.7	8	V V

Obsolete Product(s) - Obsolete Product(s)

Table 12. Truth Table

CONDITIONS	INPUT	OUTPUT	SENSE
Normal Operation	L H	L H	H H
Current Limitation	L H H	L X X	H ($T_j < T_{TSD}$) H ($T_j > T_{TSD}$) L
Overtemperature	L H	L L	H L
Undervoltage	L H	L L	X X
Overvoltage	L H	L L	H H
Output Voltage > V_{OL}	L H	H H	L H
Output Current < I_{OL}	L H	L H	H L

Figure 5.

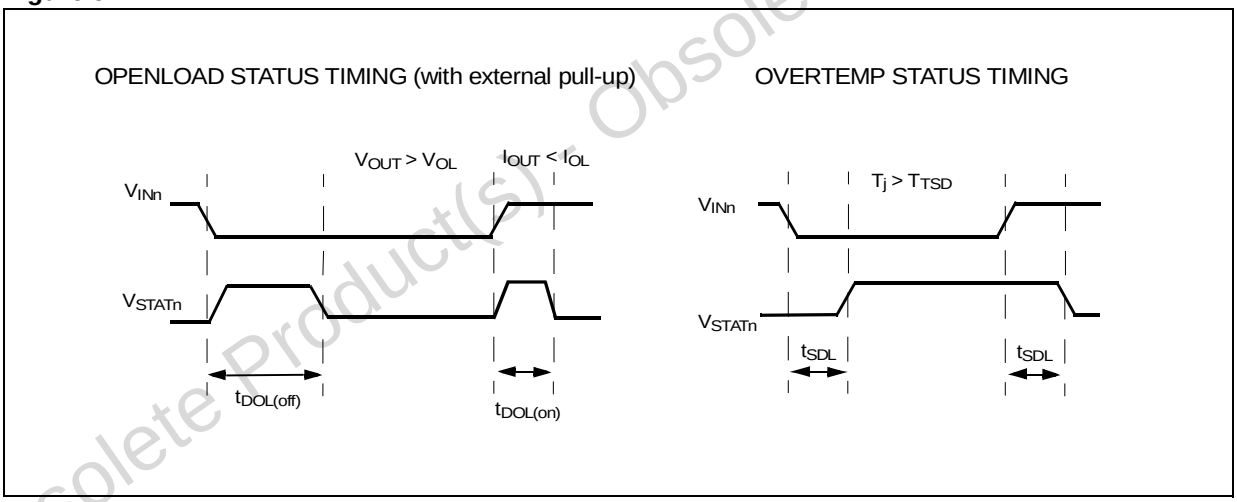

Obsolete Product(s) - Obsolete Product(s)

Figure 6. Switching time Waveforms

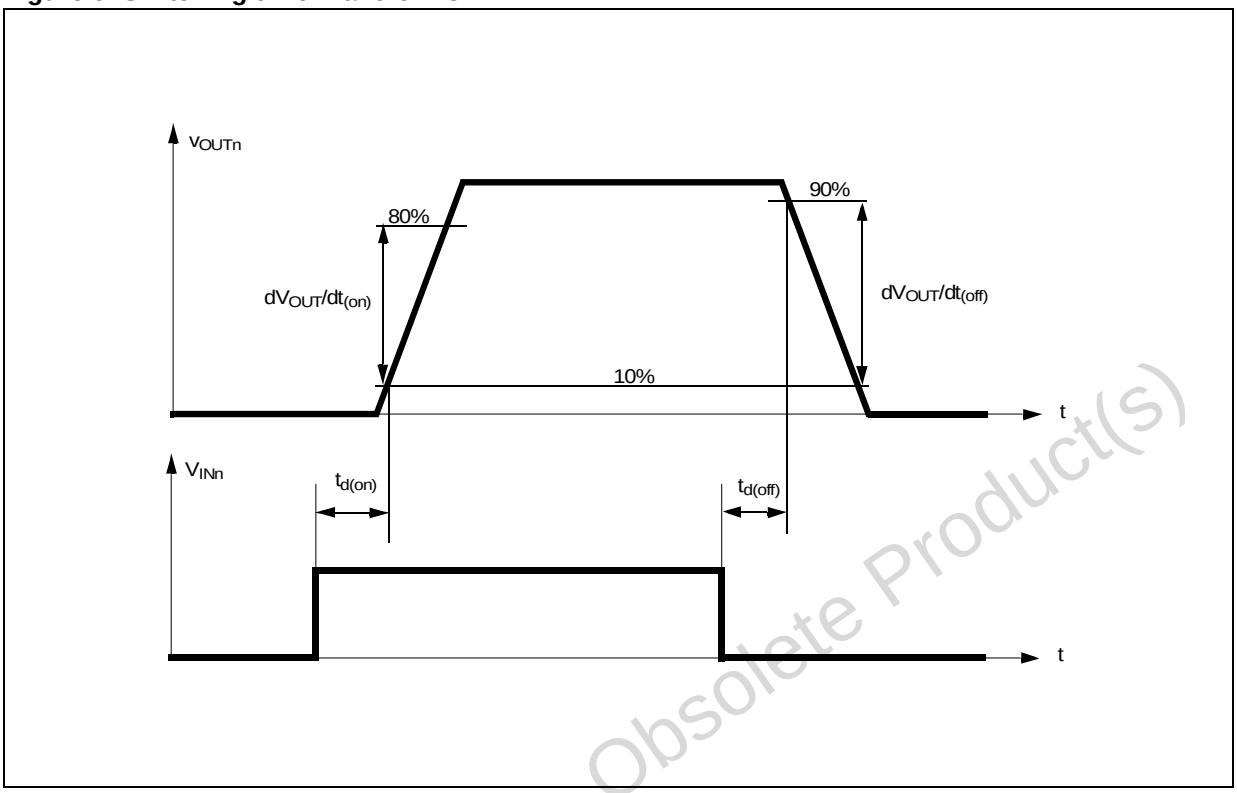


Table 13. Electrical Transient Requirements On V_{CC} Pin


ISO T/R 7637/1 Test Pulse	TEST LEVELS				
	I	II	III	IV	Delays and Impedance
1	-25 V	-50 V	-75 V	-100 V	2 ms 10 Ω
2	+25 V	+50 V	+75 V	+100 V	0.2 ms 10 Ω
3a	-25 V	-50 V	-100 V	-150 V	0.1 µs 50 Ω
3b	+25 V	+50 V	+75 V	+100 V	0.1 µs 50 Ω
4	-4 V	-5 V	-6 V	-7 V	100 ms, 0.01 Ω
5	+26.5 V	+46.5 V	+66.5 V	+86.5 V	400 ms, 2 Ω

ISO T/R 7637/1 Test Pulse	TEST LEVELS RESULTS			
	I	II	III	IV
1	C	C	C	C
2	C	C	C	C
3a	C	C	C	C
3b	C	C	C	C
4	C	C	C	C
5	C	E	E	E

CLASS	CONTENTS
C	All functions of the device are performed as designed after exposure to disturbance.
E	One or more functions of the device is not performed as designed after exposure and cannot be returned to proper operation without replacing the device.


Obsolete Product(s) - Obsolete Product(s)

Figure 7. Waveforms

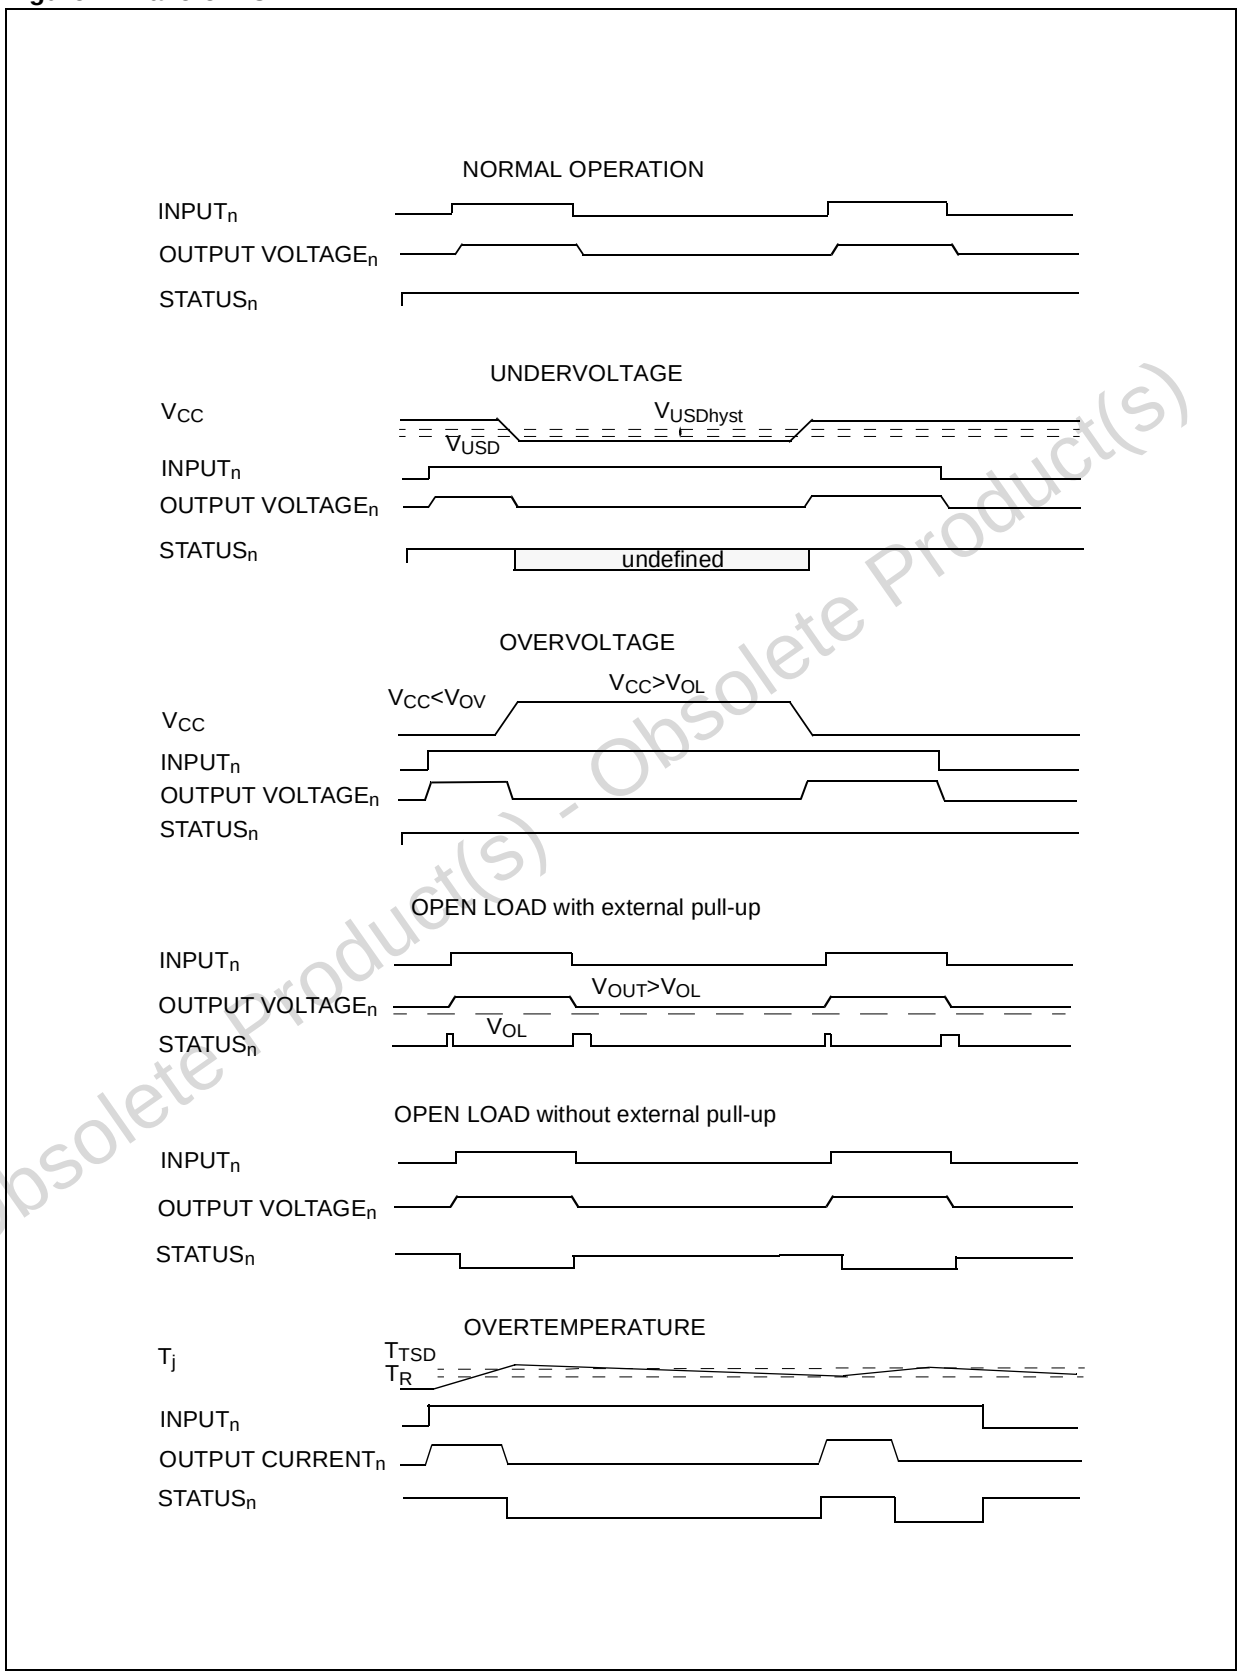

Obsolete Product(s) - Obsolete Product(s)

Figure 8. Application Schematic

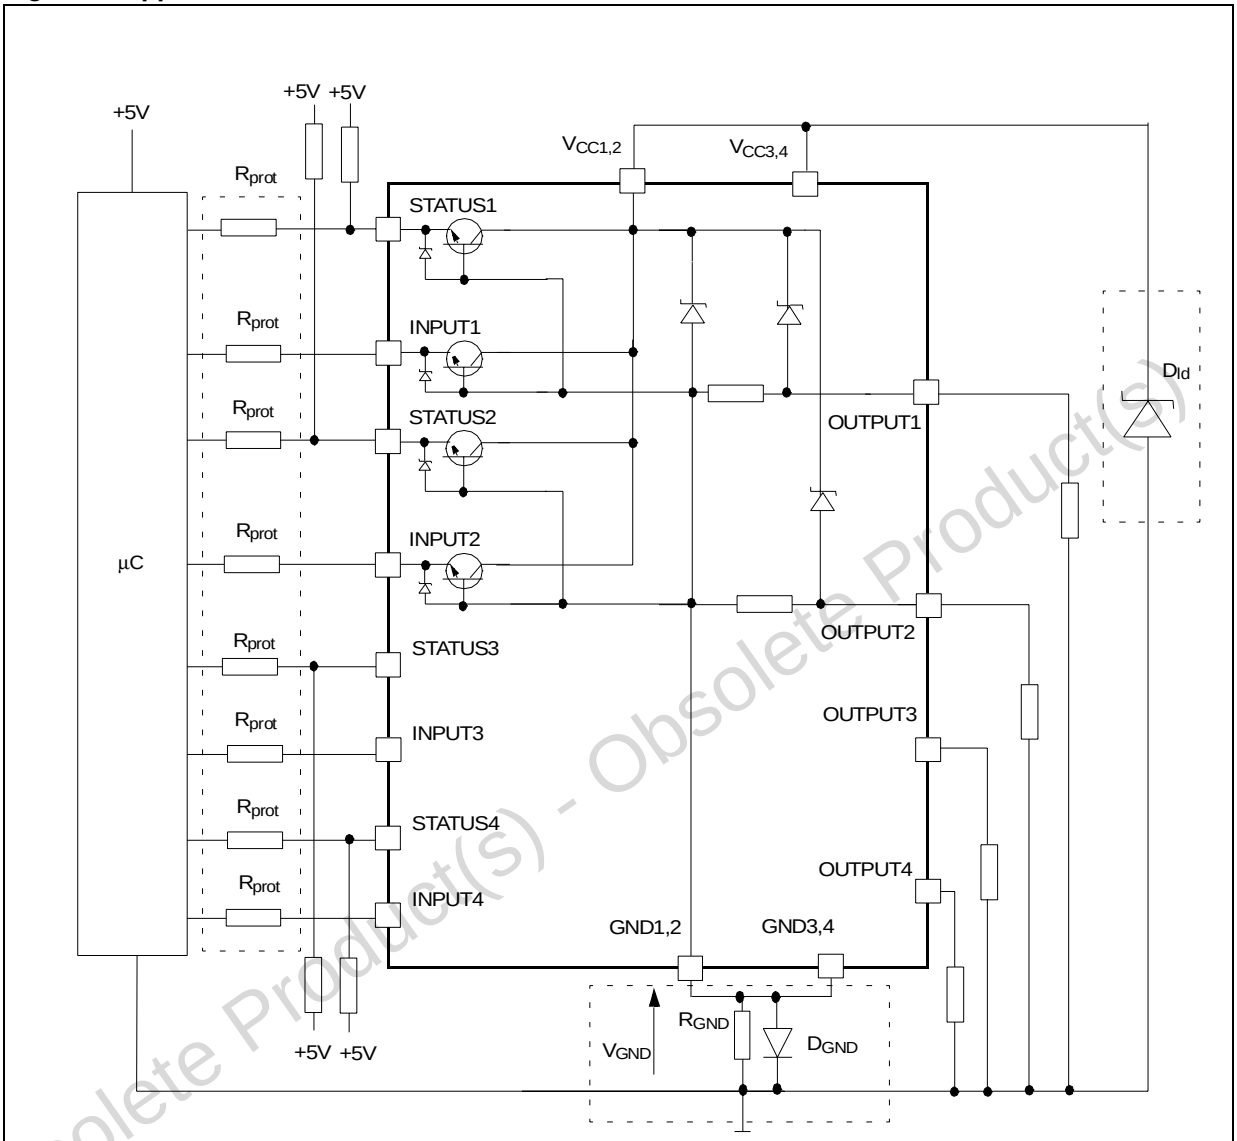

Note: Channels 3 & 4 have the same internal circuit as channel 1 & 2.

Obsolete Product(s) - Obsolete Product(s)

GND PROTECTION NETWORK AGAINST REVERSE BATTERY

Solution 1: Resistor in the ground line (R_{GND} only). This can be used with any type of load.

The following is an indication on how to dimension the R_{GND} resistor.

1) $R_{GND} \leq 600mV / 2(I_{S(on)max})$.

2) $R_{GND} \geq (-V_{CC}) / (-I_{GND})$

where $-I_{GND}$ is the DC reverse ground pin current and can be found in the absolute maximum rating section of the device's datasheet.

Power Dissipation in R_{GND} (when V_{CC}<0: during reverse battery situations) is:

$P_D = (-V_{CC})^2/R_{GND}$

This resistor can be shared amongst several different HSD. Please note that the value of this resistor should be calculated with formula (1) where $I_{S(on)max}$ becomes the sum of the maximum on-state currents of the different devices.

Please note that if the microprocessor ground is not common with the device ground then the R_{GND} will produce a shift ($I_{S(on)max} * R_{GND}$) in the input thresholds and the status output values. This shift will vary depending on how many devices are ON in the case of several high side drivers sharing the same R_{GND}.

If the calculated power dissipation leads to a large resistor or several devices have to share the same resistor then the ST suggests to utilize Solution 2.

Solution 2: A diode (D_{GND}) in the ground line.

A resistor (R_{GND}=1kΩ) should be inserted in parallel to D_{GND} if the device will be driving an inductive load.

This small signal diode can be safely shared amongst several different HSD. Also in this case, the presence of the ground network will produce a shift (≃600mV) in the input threshold and the status output values if the microprocessor ground is not common with the device ground. This shift will not vary if more than one HSD shares the same diode/resistor network.

Series resistor in INPUT and STATUS lines are also required to prevent that, during battery voltage transient, the current exceeds the Absolute Maximum Rating.

Safest configuration for unused INPUT and STATUS pin is to leave them unconnected.

LOAD DUMP PROTECTION

D_{ld} is necessary (Voltage Transient Suppressor) if the load dump peak voltage exceeds V_{CC} max DC rating. The same applies if the device will be subject to transients on the V_{CC} line that are greater than the ones shown in the ISO T/R 7637/1 table.

.µC I/Os PROTECTION:

If a ground protection network is used and negative transients are present on the V_{CC} line, the control pins will be pulled negative. ST suggests to insert a resistor (R_{prot}) in line to prevent the µC I/Os pins to latch-up.

The value of these resistors is a compromise between the leakage current of µC and the current required by the HSD I/Os (Input levels compatibility) with the latch-up limit of µC I/Os.

$-V_{CCpeak}/I_{latchup} \le R_{prot} \le (V_{OH\mu C}-V_{IH}-V_{GND}) / I_{IHmax}$

Calculation example:

For V_{CCpeak}= - 100V and $I_{latchup} \ge$ 20mA; $V_{OH\mu C} \ge$ 4.5V

5kΩ ≤ R_{prot} ≤ 65kΩ.

Recommended R_{prot} value is 10kΩ.

OPEN LOAD DETECTION IN OFF STATE

Off state open load detection requires an external pull-up resistor (R_{PU}) connected between OUTPUT pin and a positive supply voltage (V_{PU}) like the +5V line used to supply the microprocessor.

The external resistor has to be selected according to the following requirements:


1) no false open load indication when load is connected: in this case we have to avoid V_{OUT} to be higher than V_{OLmin}; this results in the following condition $V_{OUT}=(V_{PU}/(R_L+R_{PU}))R_L<V_{OLmin}$.

2) no misdetection when load is disconnected: in this case the V_{OUT} has to be higher than V_{OLmax}; this results in the following condition $R_{PU}<(V_{PU}–V_{OLmax})/I_{L(off2)}$.

Because $I_{s(OFF)}$ may significantly increase if V_{out} is pulled high (up to several mA), the pull-up resistor R_{PU} should be connected to a supply that is switched OFF when the module is in standby.

The values of V_{OLmin}, V_{OLmax} and $I_{L(off2)}$ are available in the Electrical Characteristics section.

Figure 9. Open Load detection in off state

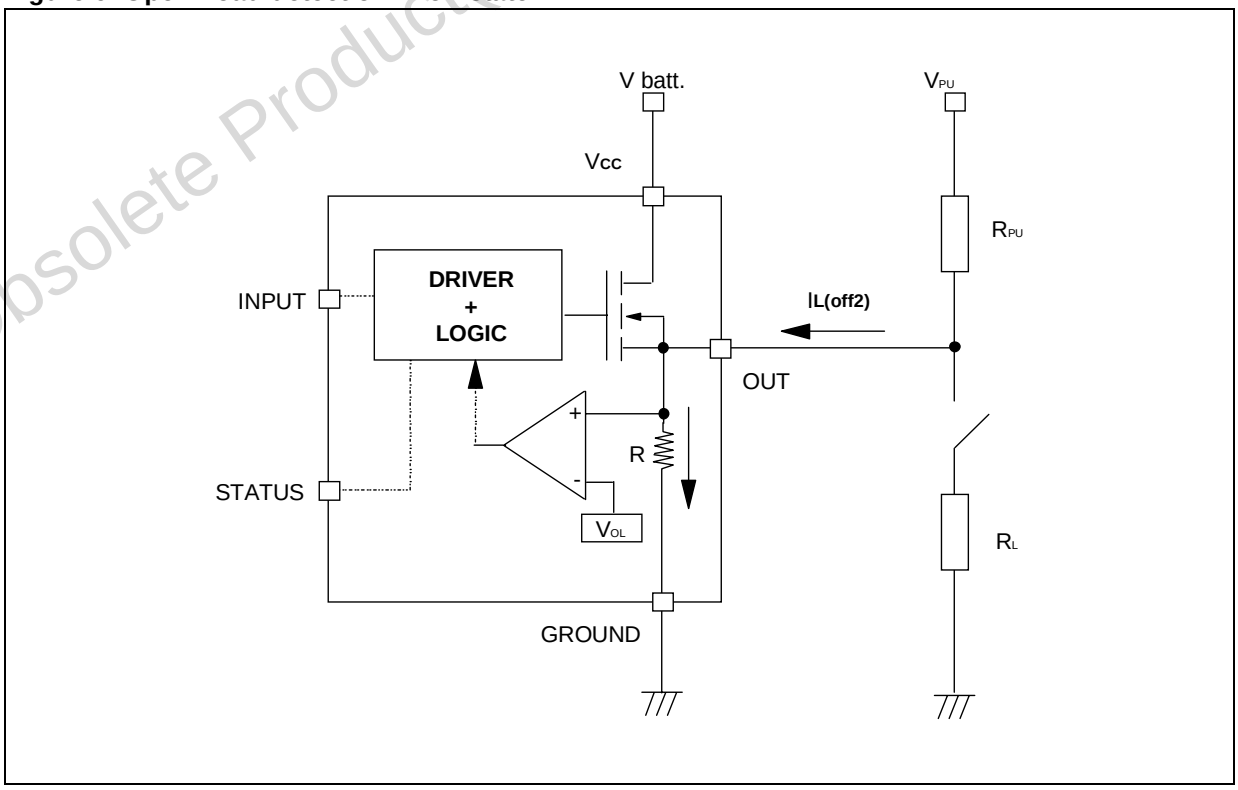

Obsolete Product(s) - Obsolete Product(s)

Figure 10. Off State Output Current

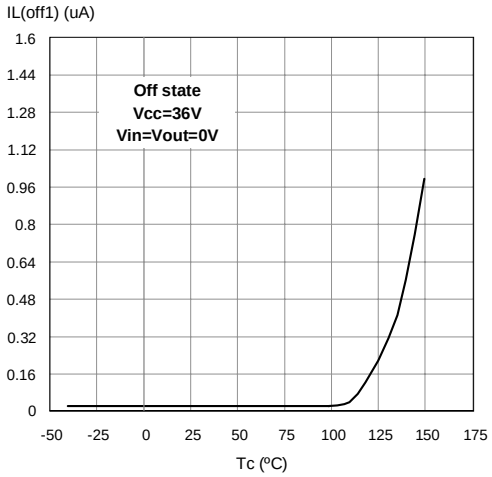


Figure 11. Input Clamp Voltage

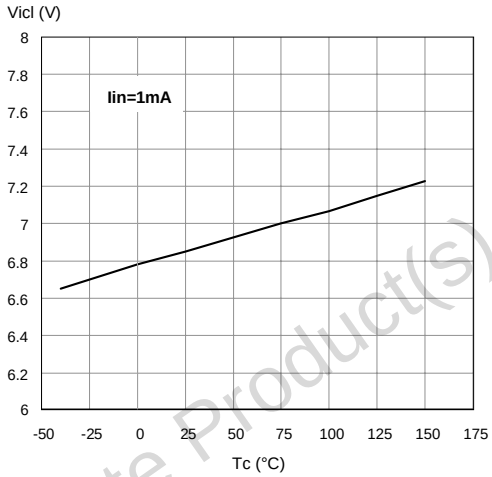


Figure 12. Status Low Output Voltage

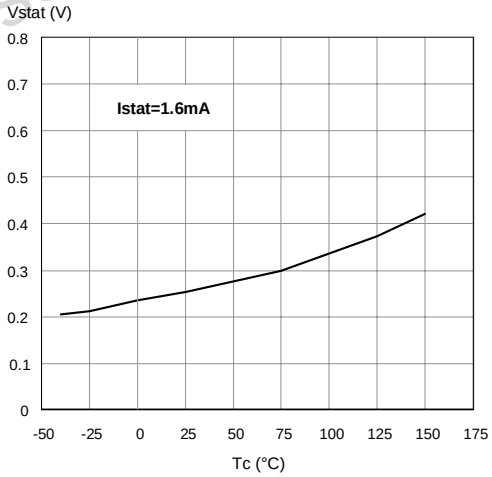


Figure 13. High Level Input Current

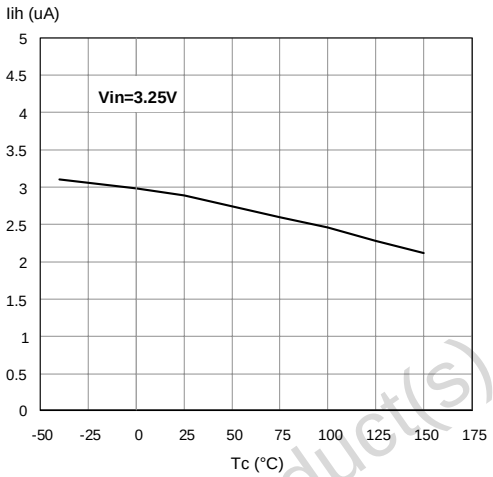


Figure 14. Status Leakage Current


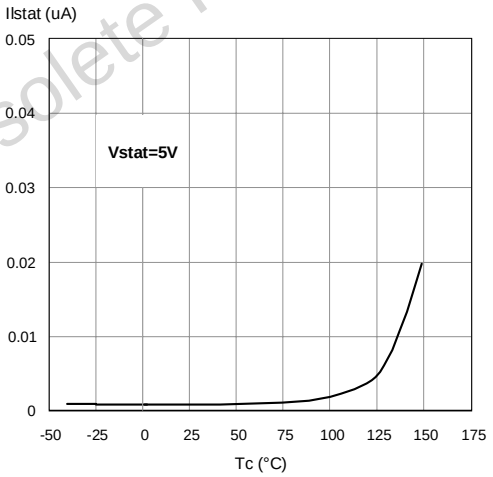


Figure 15. Status Clamp Voltage

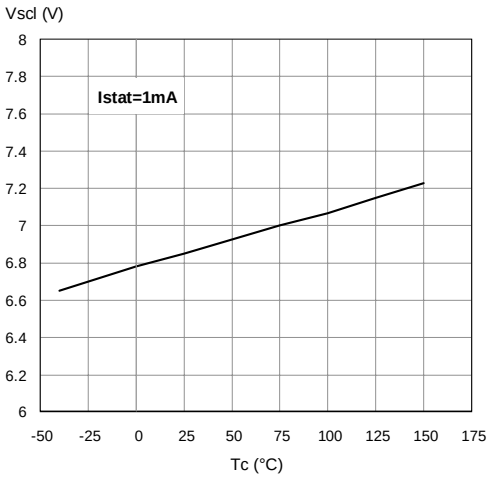

Obsolete Product(s) - Obsolete Product(s)

Figure 16. Overvoltage Shutdown

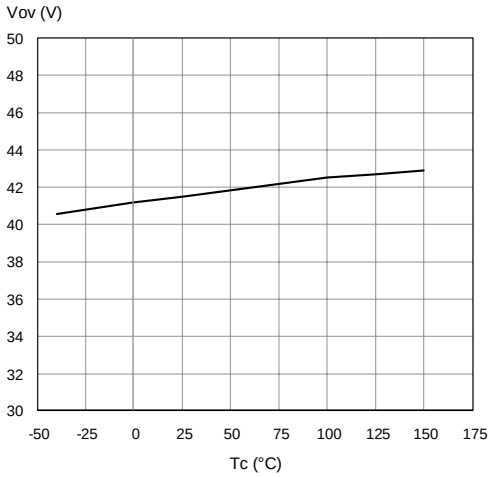


Figure 17. Turn-on Voltage Slope

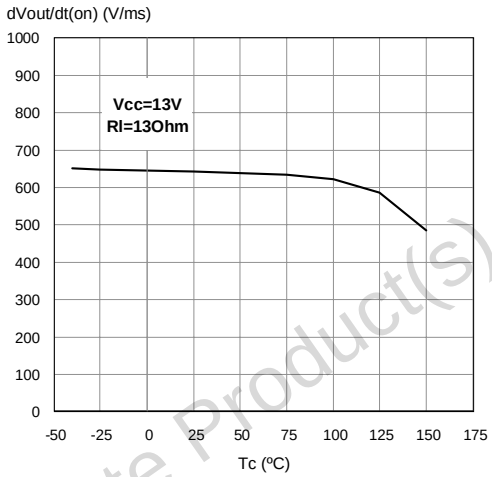


Figure 18. On State Resistance Vs T_{case}

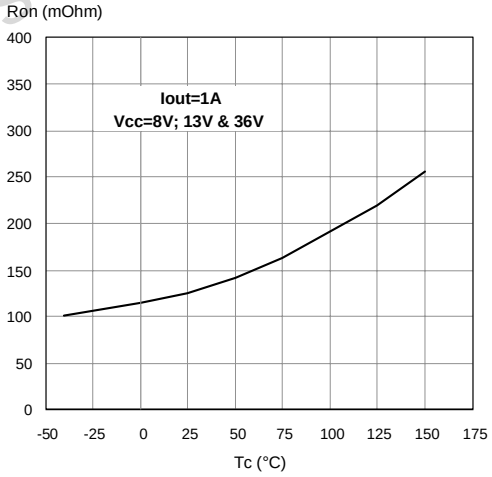


Figure 19. I_{LIM} Vs T_{case}

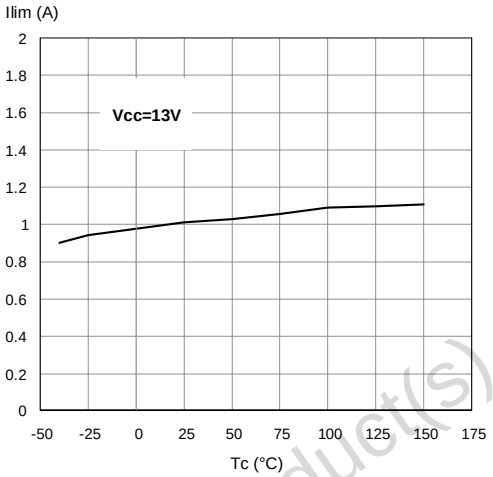


Figure 20. Turn-off Voltage Slope


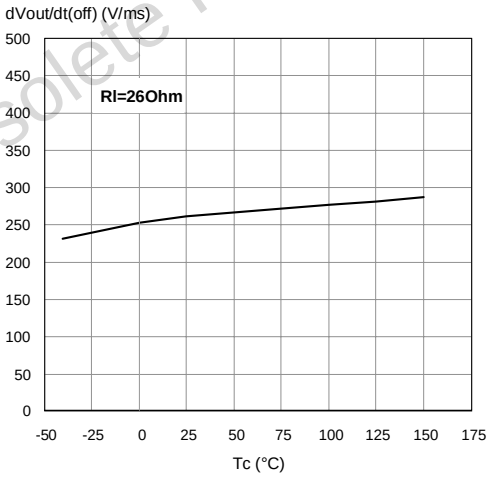


Figure 21. On State Resistance Vs V_{CC}

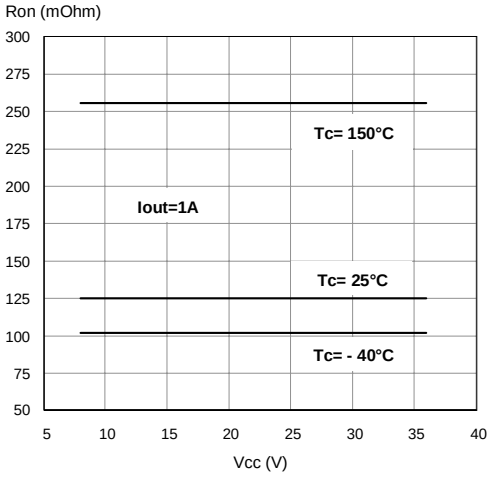

Obsolete Product(s) - Obsolete Product(s)

Figure 22. Input High Level

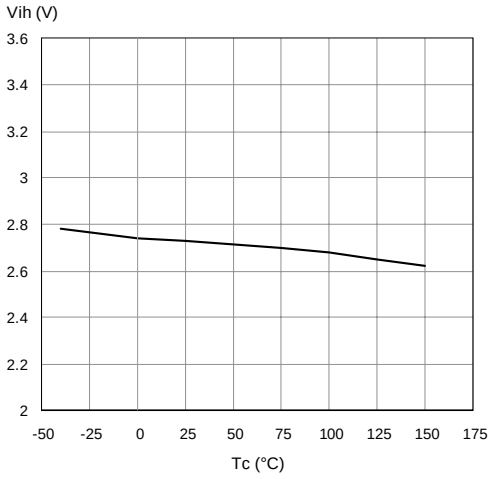


Figure 23. Openload On State Detection Threshold

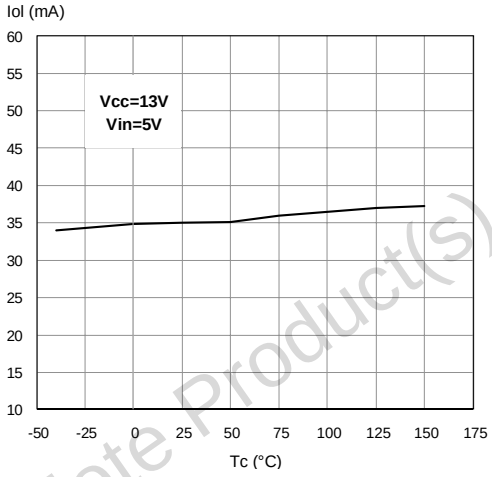


Figure 24. Input Hysteresis Voltage

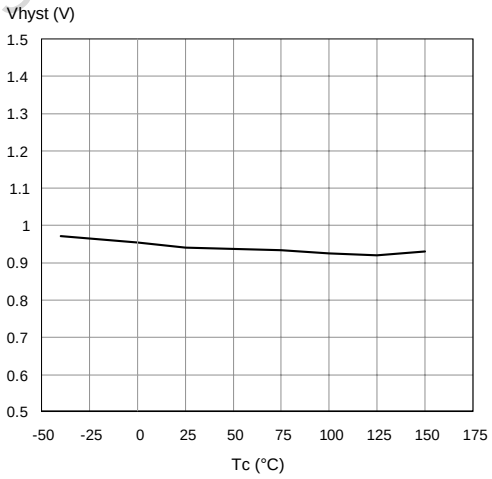


Figure 25. Input Low Level


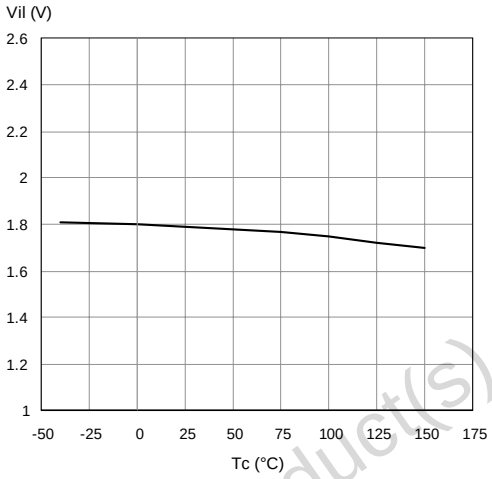


Figure 26. Openload Off State Detection Threshold



Obsolete Product(s) - Obsolete Product(s)

Figure 27. SO-28 (Double Island) Maximum turn off current versus load inductance

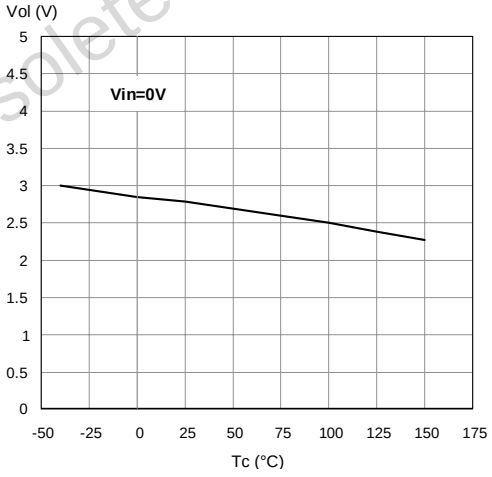


A = Single Pulse at T_{Jstart}=150ºC
B= Repetitive pulse at T_{Jstart}=100ºC
C= Repetitive Pulse at T_{Jstart}=125ºC

Conditions:
V_{CC}=13.5V

Values are generated with R_L=0Ω


In case of repetitive pulses, T_{jstart} (at beginning of each demagnetization) of every pulse must not exceed the temperature specified above for curves B and C.

Obsolete Product(s) - Obsolete Product(s)

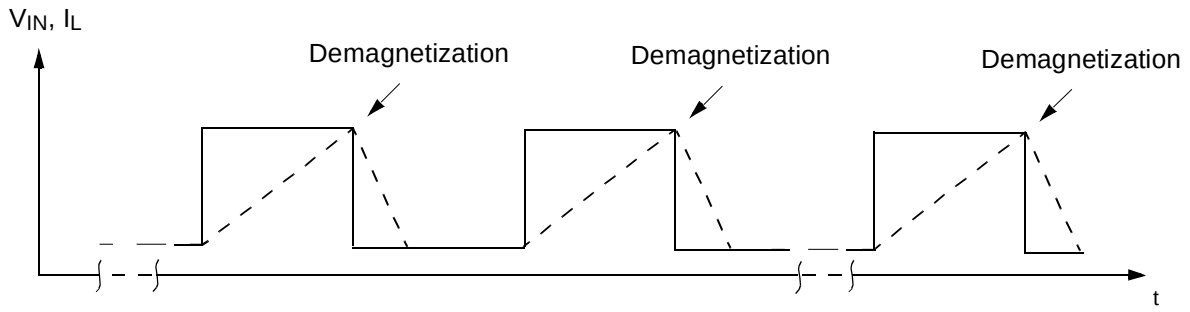

SO-28 Double Island Thermal Data

Figure 28. Double Island PC Board

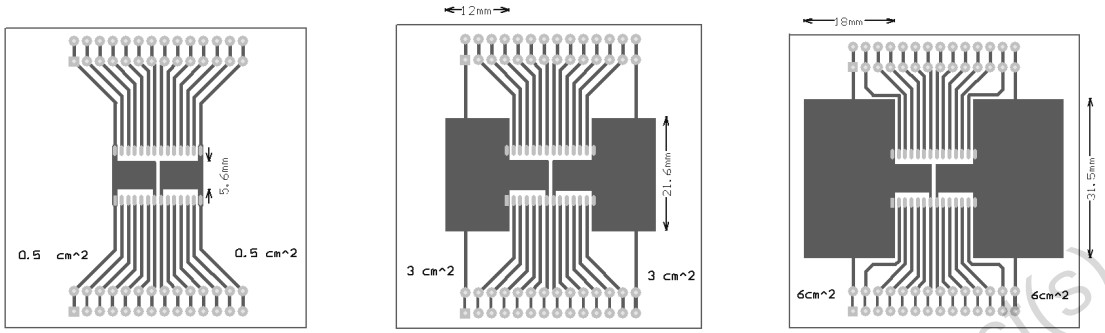

Layout condition of R_{th} and Z_{th} measurements (PCB FR4 area= 58mm x 58mm, PCB thickness=2mm, Cu thickness=35µm, Copper areas: 0.5cm^2, 3cm^2, 6cm^2).

Table 14. Thermal Calculation According To The Pcb Heatsink Area


Chip 1	Chip 2	T_{jchip1}	T_{jchip2}	Note
ON	OFF	R_{thA} x P_{dchip1} + T_{amb}	R_{thC} x P_{dchip1} + T_{amb}	
OFF	ON	R_{thC} x P_{dchip2} + T_{amb}	R_{thA} x P_{dchip2} + T_{amb}	
ON	ON	R_{thB} x (P_{dchip1} + P_{dchip2}) + T_{amb}	R_{thB} x (P_{dchip1} + P_{dchip2}) + T_{amb}	P_{dchip1}=P_{dchip2}
ON	ON	(R_{thA} x P_{dchip1}) + R_{thC} x P_{dchip2} + T_{amb}	(R_{thA} x P_{dchip2}) + R_{thC} x P_{dchip1} + T_{amb}	P_{dchip1}≠P_{dchip2}

R_{thA} = Thermal resistance Junction to Ambient with one chip ON

R_{thB} = Thermal resistance Junction to Ambient with both chips ON and P_{dchip1}=P_{dchip2}

R_{thC} = Mutual thermal resistance

Figure 29. $R_{thj\text{-}amb}$ Vs. PCB Copper Area In Open Box Free Air Condition

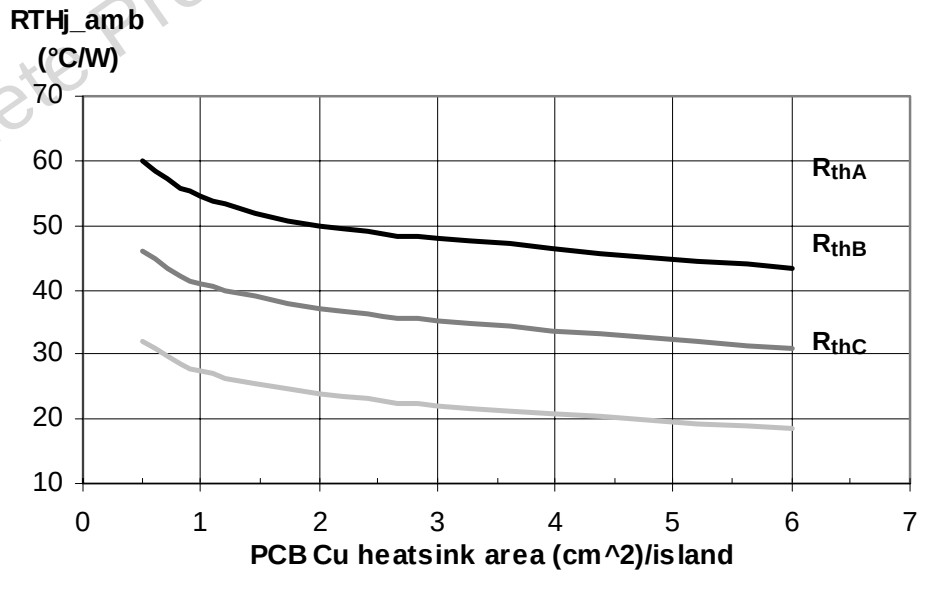

Obsolete Product(s) - Obsolete Product(s)

Figure 30. SO-28 Thermal Impedance Junction Ambient Single Pulse


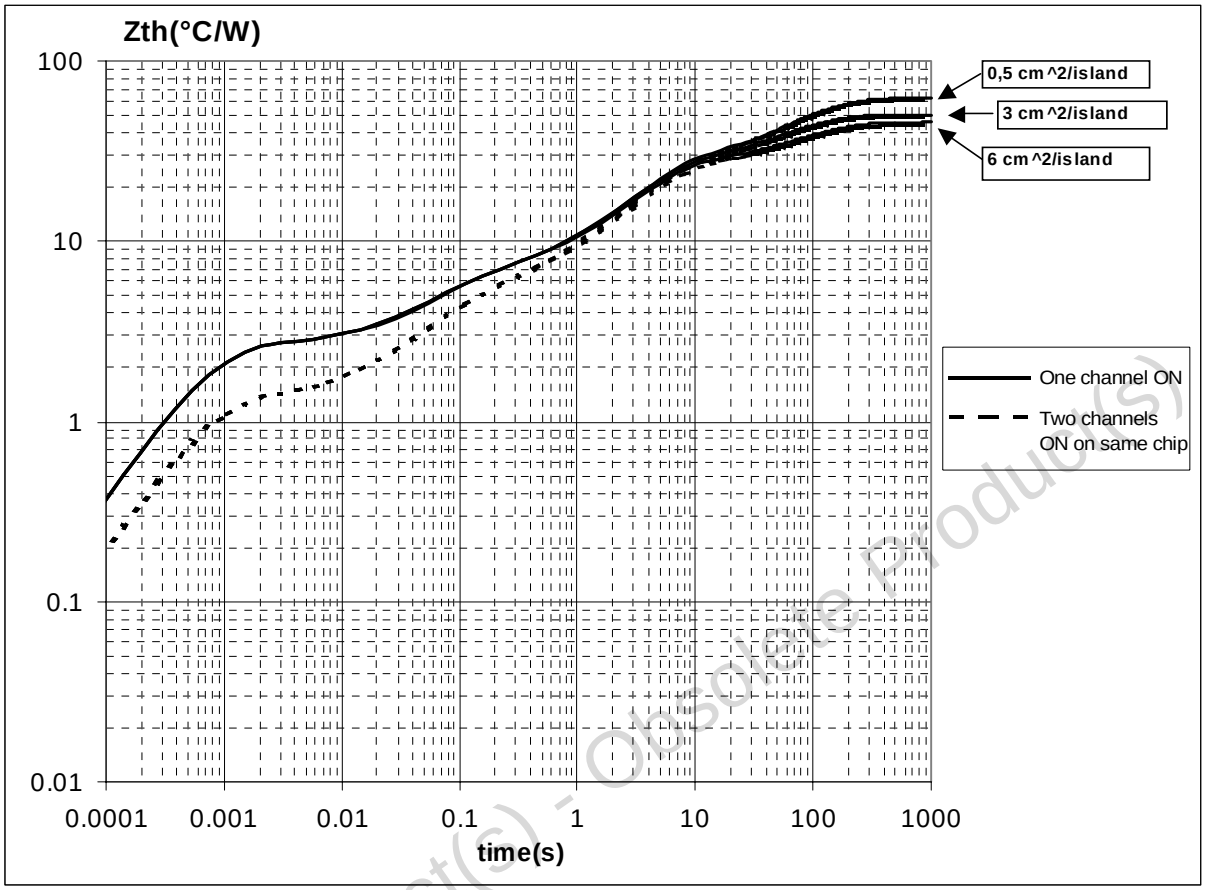


Figure 31. Thermal fitting model of a double channel HSD in SO-28

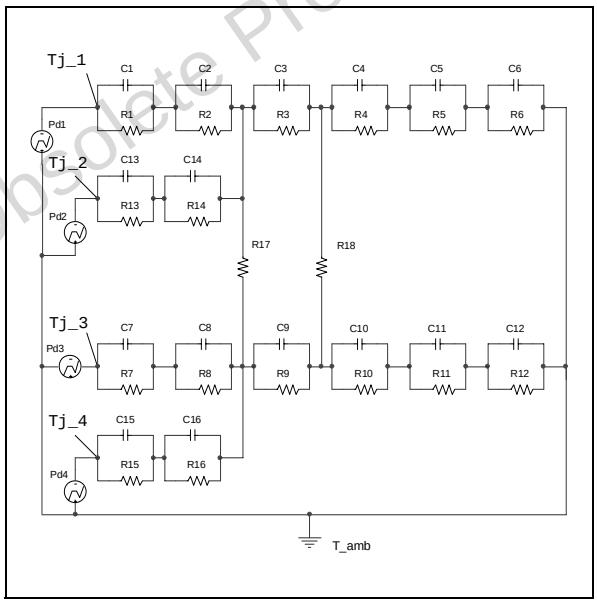

Pulse calculation formula

$$Z_{TH\delta} = R_{TH} \cdot \delta + Z_{THtp}(1 - \delta)$$

where $\delta = t_p / T$

Table 15. Thermal Parameter

Area/island (cm^2)	0.5	6
R1=R7=R13=R15 (°C/W)	0.05	
R2=R8=R14=R16 (°C/W)	0.3	
R3=R9 (°C/W)	3.4	
R4=R10 (°C/W)	11	
R5=R11 (°C/W)	15	
R6=R12 (°C/W)	30	13
C1=C7=C13=C15 (W.s/°C)	0.001	
C2=C8=C14=C16 (W.s/°C)	5.00E-03	
C3=C9 (W.s/°C)	1.00E-02	
C4=C10 (W.s/°C)	0.2	
C5=C11 (W.s/°C)	1.5	
C6=C12 (W.s/°C)	5	8
R17=R18 (°C/W)	150	


Obsolete Product(s) - Obsolete Product(s)

PACKAGE MECHANICAL

Table 16. SO-28 Mechanical Data


Symbol	millimeters		
	Min	Typ	Max
A			2.65
a1	0.10		0.30
b	0.35		0.49
b1	0.23		0.32
C		0.50	
c1		45° (typ.)	
D	17.7		18.1
E	10.00		10.65
e		1.27	
e3		16.51	
F	7.40		7.60
L	0.40		1.27
S		8° (max.)	

Figure 32. SO-28 Package Dimensions

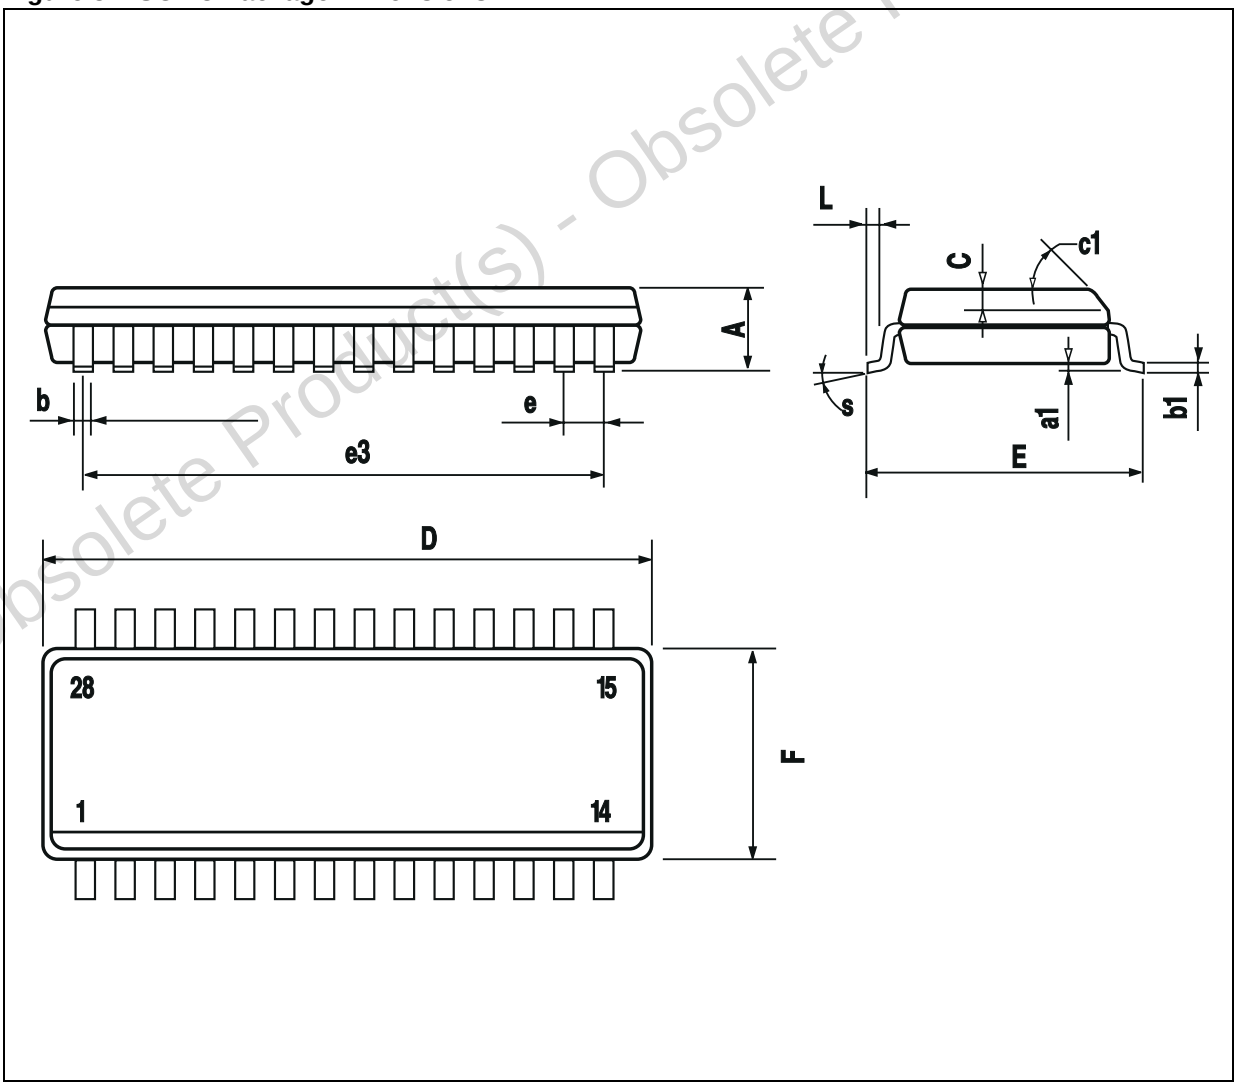

Obsolete Product(s) - Obsolete Product(s)


Figure 33. SO-28 Tube Shipment (No Suffix)



Base Q.ty	28
Bulk Q.ty	700
Tube length (± 0.5)	532
A	3.5
B	13.8
C (± 0.1)	0.6

All dimensions are in mm.

Figure 34. Tape And Reel Shipment (Suffix "TR")

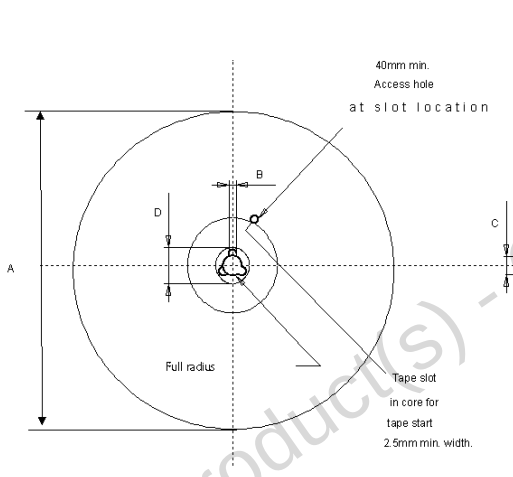

REEL DIMENSIONS


Base Q.ty	1000
Bulk Q.ty	1000
A (max)	330
B (min)	1.5
C (± 0.2)	13
F	20.2
G (+ 2 / -0)	16.4
N (min)	60
T (max)	22.4

TAPE DIMENSIONS

According to Electronic Industries Association (EIA) Standard 481 rev. A, Feb. 1986

Tape width	**W**	16
Tape Hole Spacing	**P0 (± 0.1)**	4
Component Spacing	**P**	12
Hole Diameter	**D (± 0.1/-0)**	1.5
Hole Diameter	**D1 (min)**	1.5
Hole Position	**F (± 0.05)**	7.5
Compartment Depth	**K (max)**	6.5
Hole Spacing	**P1 (± 0.1)**	2

All dimensions are in mm.

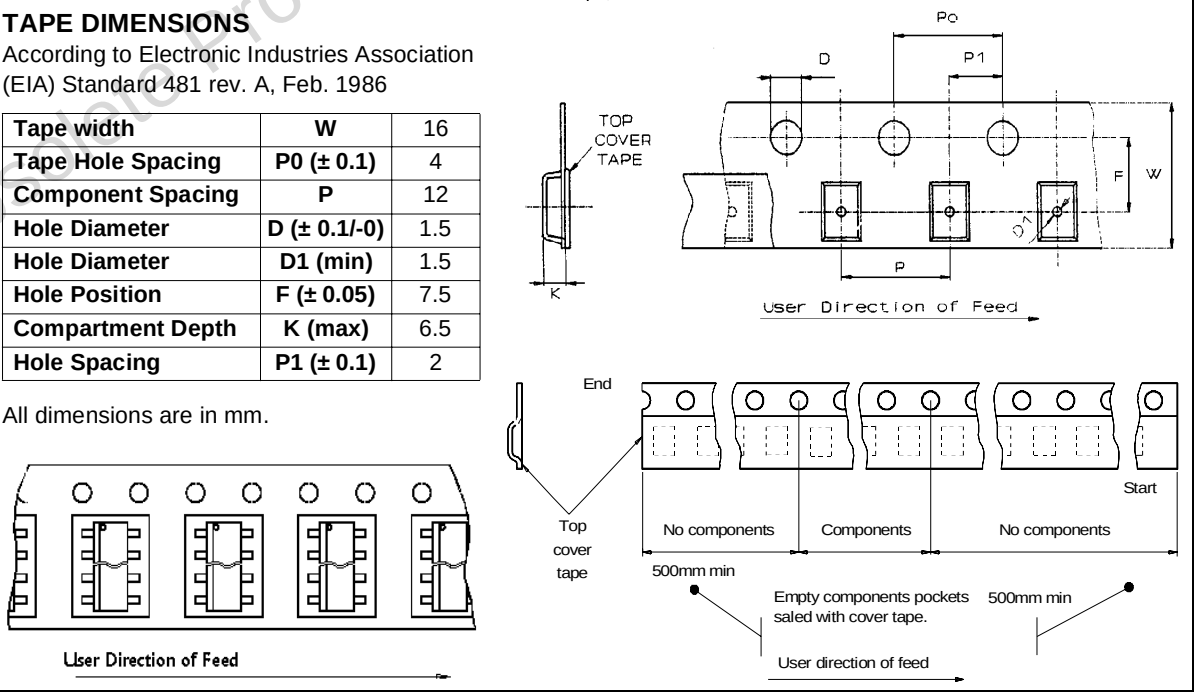

Obsolete Product(s) - Obsolete Product(s)

REVISION HISTORY

Date	Revision	Description of Changes
Oct. 2004	1	- First Release

Obsolete Product(s) - Obsolete Product(s)

Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.

All other names are the property of their respective owners

© 2004 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com